



(51) International Patent Classification:
H04W 56/00 (2009.01)

(21) International Application Number:
PCT/EP2012/071890

(22) International Filing Date:
6 November 2012 (06.11.2012)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: **NOKIA SOLUTIONS AND NETWORKS OY** [FI/FI]; Karaportti 3, FIN-02610 Espoo (FI).

(72) Inventors; and

(71) Applicants : **ROSA, Claudio** [IT/DK]; Krebsen 14, DK-8900 Randers (DK). **FREDERIKSEN, Frank** [DK/DK]; Hornbækvej 4, DK-9270 Klarup (DK). **LUNTILA, Timo Erkki** [FI/FI]; Tontunmäentie 34 F, FIN-02200 Espoo (FI).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD AND APPARATUS FOR RECEIVING TIMING INFORMATION FROM A CELL OR NETWORK A LESS ACTIVE MODE

Figure 5

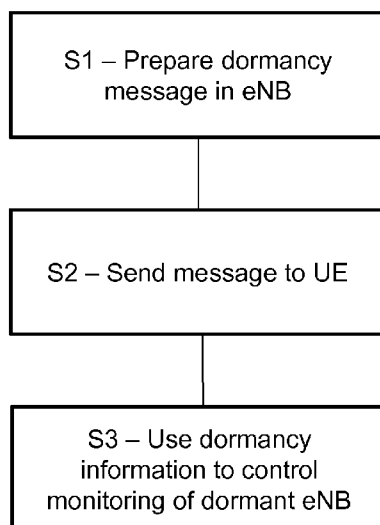

(57) Abstract: A method comprising: receiving timing information associated with a transmission of reference information from a first cell or first network node when in a less active mode; and using said timing information to control when transmissions from said first cell or first network node are monitored for said reference information.

