



- (51) International Patent Classification:
B63B 1/14 (2006.01) *B63B 43/14* (2006.01)
- (21) International Application Number:
PCT/IL2014/050542
- (22) International Filing Date:
16 June 2014 (16.06.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
227008 17 June 2013 (17.06.2013) IL
- (72) Inventors; and
- (71) Applicants : AVTALION, Isaac [IL/IL]; 15 Klil Ahoresh Street, 8496500 Omer (IL). MAOR, Dror [IL/IL]; 16/4 D'Izraeli Street, 7874416 Ashkelon (IL).
- (74) Agents: MALTZMAN, Shmuel et al.; Luzzatto & Luzzatto, P.O. Box 5352, 8415202 Beer Sheva (IL).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

[Continued on next page]

- (54) Title: MULTITASKING WATERCRAFT

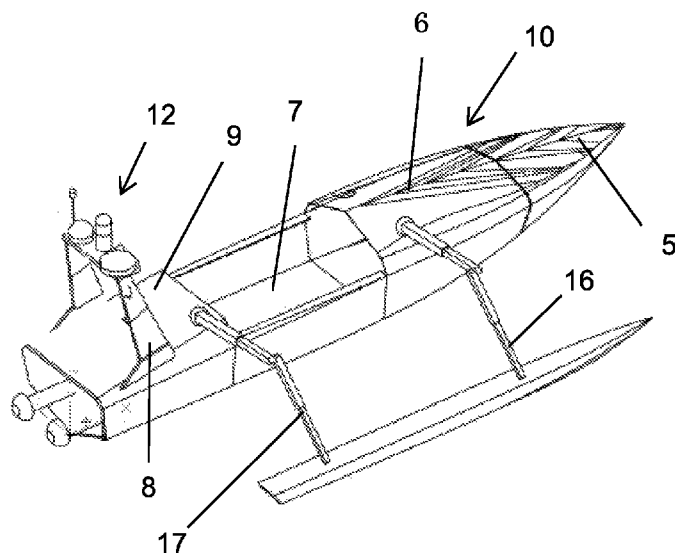


Fig. 1

(57) Abstract: A transportable multitasking watercraft comprises a single planing hull for generating planing conditions, and one or more displaceable stabilizers provided with a buoyant element and operatively connected to said hull by one or more arms. The one or more stabilizers are configured to maintain watercraft stability when submerged in a body of water and the speed of the watercraft is less than a planing inducing speed. The watercraft has a length of no greater than 20 m and a length to beam ratio of at least 4.5 so as to be temporarily storable within a container when being transported to a desired operation zone.

WO 2014/203244 A1



Published:

— *with international search report (Art. 21(3))*