

(51) International Patent Classification:
E01B 9/68 (2006.01)(21) International Application Number:
PCT/EP2012/076143(22) International Filing Date:
19 December 2012 (19.12.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11194344.5 19 December 2011 (19.12.2011) EP(71) Applicant: **HF HOLDING SA** [BE/BE]; Rue du Commerce 13, B-1400 Nivelles (BE).(72) Inventors: **AWI ABALO, Bolom**; Romeinsesteenweg 152, B-1800 Vilvoorde (BE). **LENS, Michel**; Den Draaier 20, B-1650 Beersel (BE).(74) Agent: **PRONOVEM**; Office Van Malderen, Ave. Josse Goffin 158, B-1082 Brussels (BE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

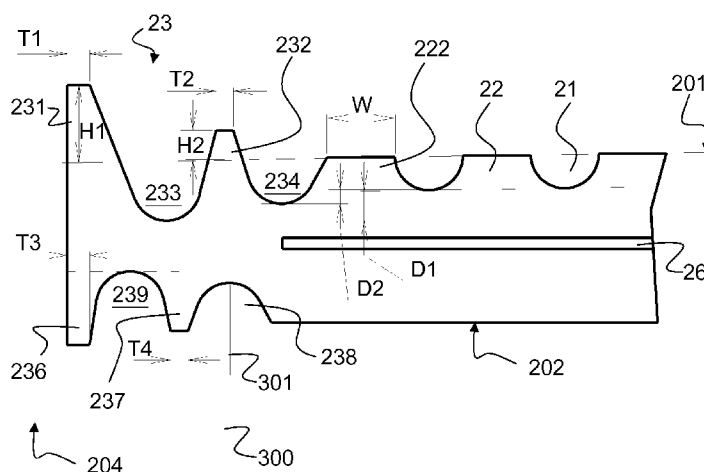
Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

(54) Title: RAIL PAD WITH SEAL

**FIG 3**

(57) **Abstract:** An elongate rail pad (20) for providing continuous support of a rail has a top face (201) and a bottom face (202), wherein the top face (201) is formed with a plurality of spaced apart longitudinal grooves (201). A longitudinal seal (23) against water and dirt is provided on the top face (201) at each lateral end (204). The seal (23) comprises, when considered from the lateral end, a successive arrangement of a first longitudinal lip (231), a first longitudinal channel (233), a second longitudinal lip (232), and a second longitudinal channel (234), in that order, wherein the first lip (231) projects above the top face (201), and the first and second channels (233, 234) have a cross sectional size large enough to allow, in use, water that oozes in to flow throughout the channel, and the thickness (T2) of the second lip (232) is smaller than the spacing (W) between the second channel (234) and an adjacent first groove.