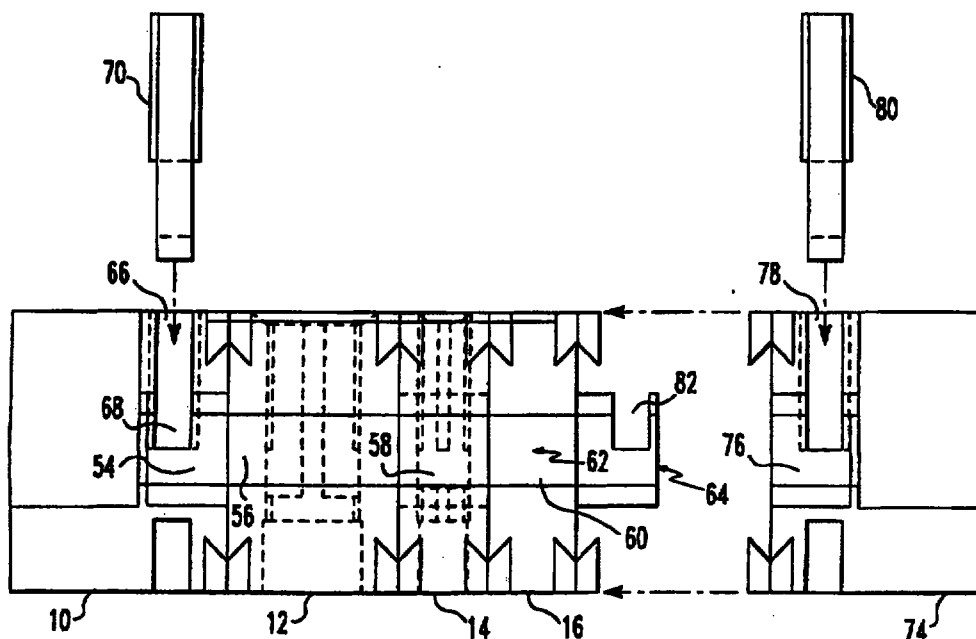


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H01R 9/22	A1	(11) International Publication Number: WO 97/28580 (43) International Publication Date: 7 August 1997 (07.08.97)
(21) International Application Number: PCT/US97/01787 (22) International Filing Date: 31 January 1997 (31.01.97) (30) Priority Data: 60/011,073 2 February 1996 (02.02.96) US (71) Applicant (for all designated States except US): BERG TECHNOLOGY, INC. [US/US]; One East First Street, Reno, NV 89501 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): PENDLETON, Christopher, S. [US/US]; 120 Briar Patch Drive, Carlisle, PA 17013 (US). DOUTRICH, Ray, C. [US/US]; 750 Whitman Road, Lebanon, PA 17042 (US). STONER, Stuart [US/US]; 559 Fishing Creek Road, Lewisberry, PA 17339 (US). (74) Agents: LONG, Daniel, J. et al.; 825 Old Trail Road, Etters, PA 17319 (US).		(81) Designated States: CN, JP, KR, SG, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: MODULAR CABLE TO BOARD POWER CONNECTOR**(57) Abstract**

An element of an electrical connector in which a plurality of axial segments (10, 12, 14, 16) are positioned in side by side relation. A transverse passageway (62) extends through the axial segments and a rail (64) is positioned in the transverse passageway to link the segments together. A latch (70) is fixed within an end segment to lock the rail in place. The segments may be power modules or signal modules. The number and type of power modules used may be selected based on specific power requirements.