

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 July 2003 (03.07.2003)


PCT

(10) International Publication Number
WO 03/055142 A1

- (51) International Patent Classification⁷: **H04L 12/18**, H04Q 7/38
- (74) Agents: **WADSWORTH, Philip R.** et al.; 5775 Morehouse Drive, San Diego, CA 92121 (US).
- (21) International Application Number: PCT/US02/40419
- (22) International Filing Date:
17 December 2002 (17.12.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10/029,711 19 December 2001 (19.12.2001) US
- (71) Applicant: **QUALCOMM, INCORPORATED**
[US/US]; 5775 Morehouse Drive, San Diego, CA 92121 (US).
- (72) Inventor: **LUNDBY, Stein, A.**; 716 North Granados Ave, Solana Beach, CA 92075 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: EFFICIENT MULTICASTING FOR PACKET DATA SYSTEMS

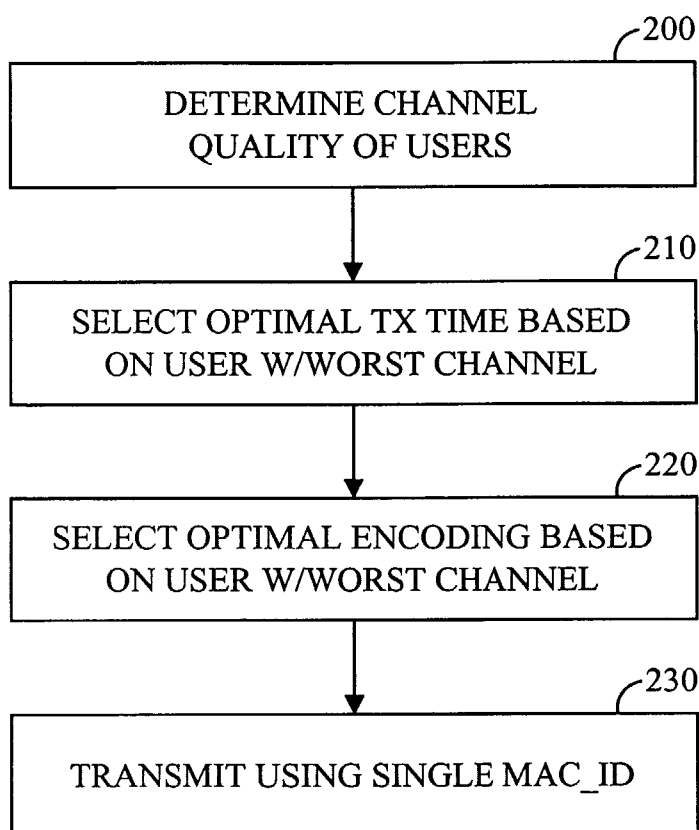

(57) Abstract: Methods and apparatus are presented for efficient broadcasting in wireless packet data systems. A single MAC_ID is used for broadcasting to a group of subscribers. By using the channel quality information of the group of subscribers (200), a base station determines the identity of the subscriber with the worst channel conditions (210). The timing and the transmission format of the multi-cast are then tailored so that the subscriber with the worst channel conditions is capable of recovering the transmission (220). If the timing and the transmission format is chosen in relation to subscriber with the worst channel conditions, it is probable that other subscribers will be able to recover the transmission as well. Hence, only a single MAC_ID need to be used to make a single broadcast, rather than sending multiple transmissions to multiple subscribers.

WO 03/055142 A1



Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.