

(51) International Patent Classification:
H04L 12/56 (2006.01) *H04W 28/10* (2009.01)(21) International Application Number:
PCT/EP2010/054380(22) International Filing Date:
31 March 2010 (31.03.2010)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET L M ERICSSON (PUBL)** [SE/SE]; S-16483 Stockholm (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LUDWIG, Reiner** [US/DE]; Bergstr. 18, 52393 Hürtgenwald (DE). **WIE-MANN, Henning** [DE/DE]; Kelmbergweg 7, 52080 Aachen (DE).(74) Agent: **BECKMANN, Claus**; Thomas-Wimmer-Ring 15, 80539 München (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CONGESTION HANDLING IN A COMMUNICATION NETWORK

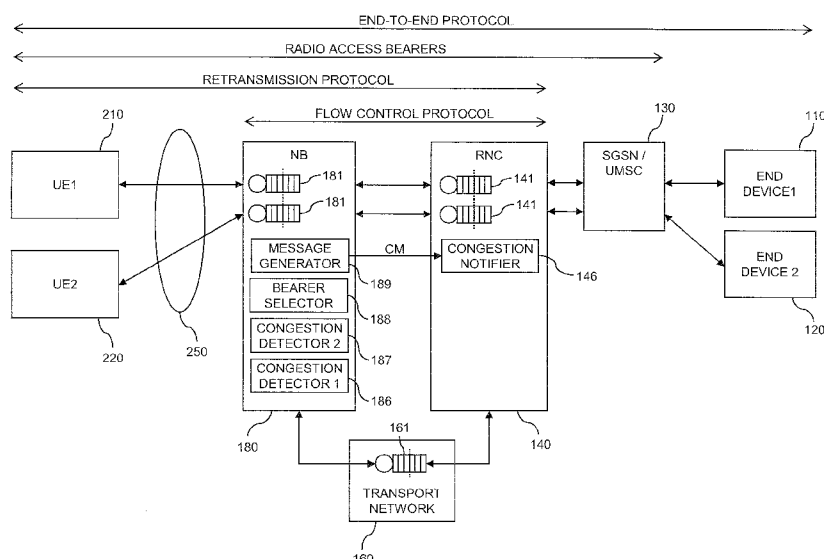


FIG. 1A

(57) Abstract: Data packets of a flow associated with a first bearer and data packets of a flow associated with a second bearer are received in an intermediate node (140). The data packets are then transmitted from the intermediate node (140). In response to a congestion being detected on the first bearer, one of the first bearer and the second bearer is selected for notification of the congestion in the associated flow. The selection may be based on a type of the congestion, e.g. the detected congestion being in a transport network (160) or the congestion being on a radio link (250).