

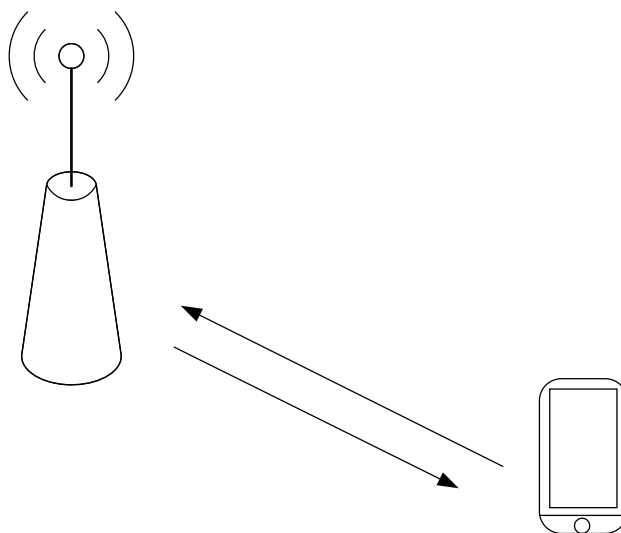


FIG. 1

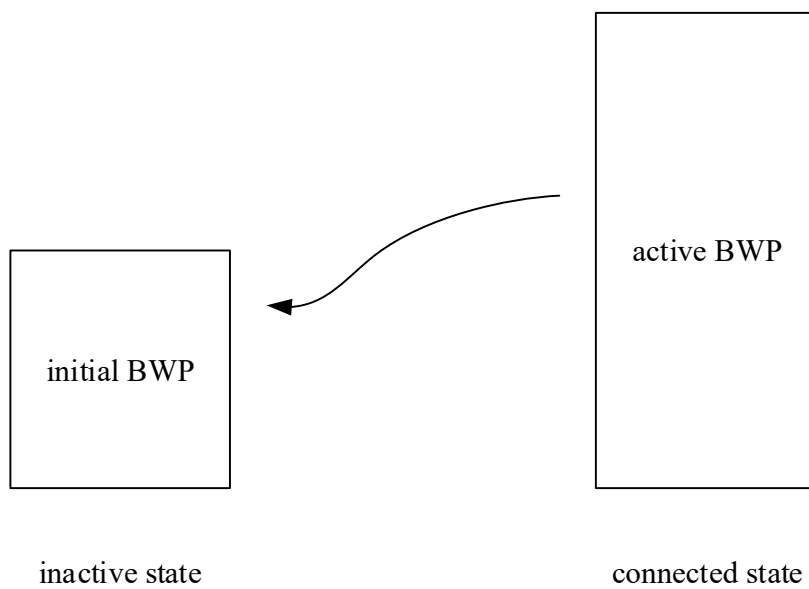


FIG. 2

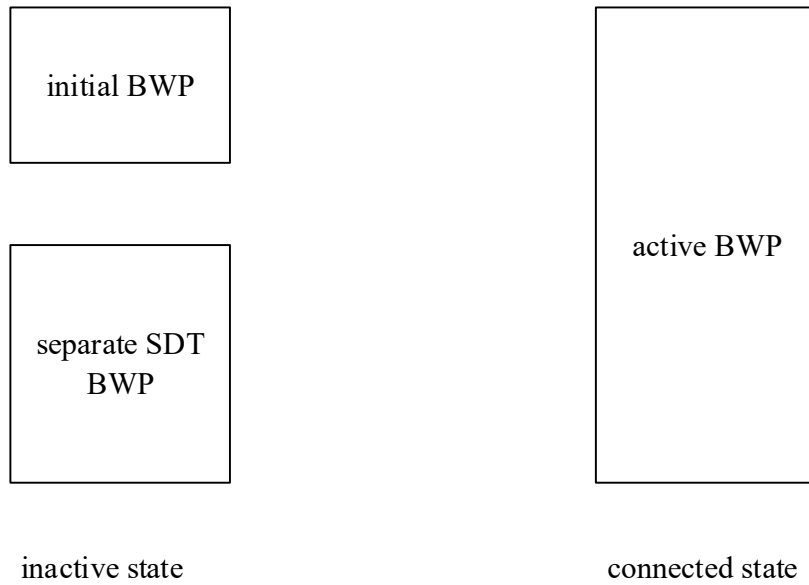


FIG. 3

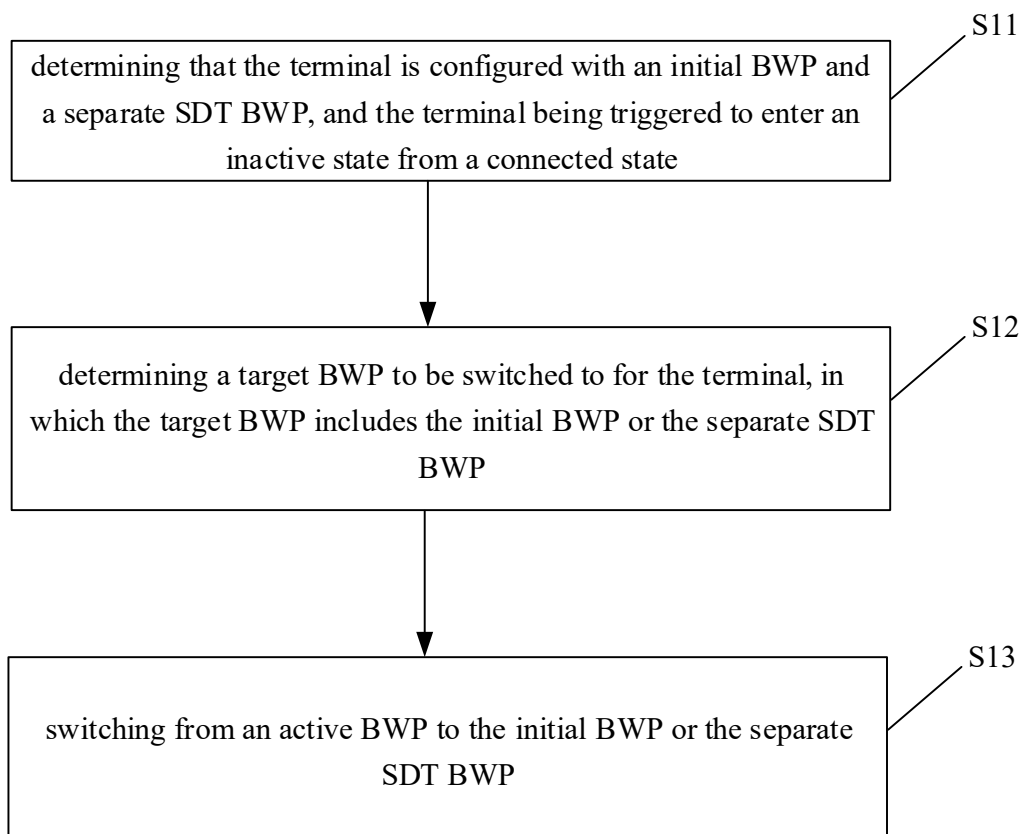


FIG. 4

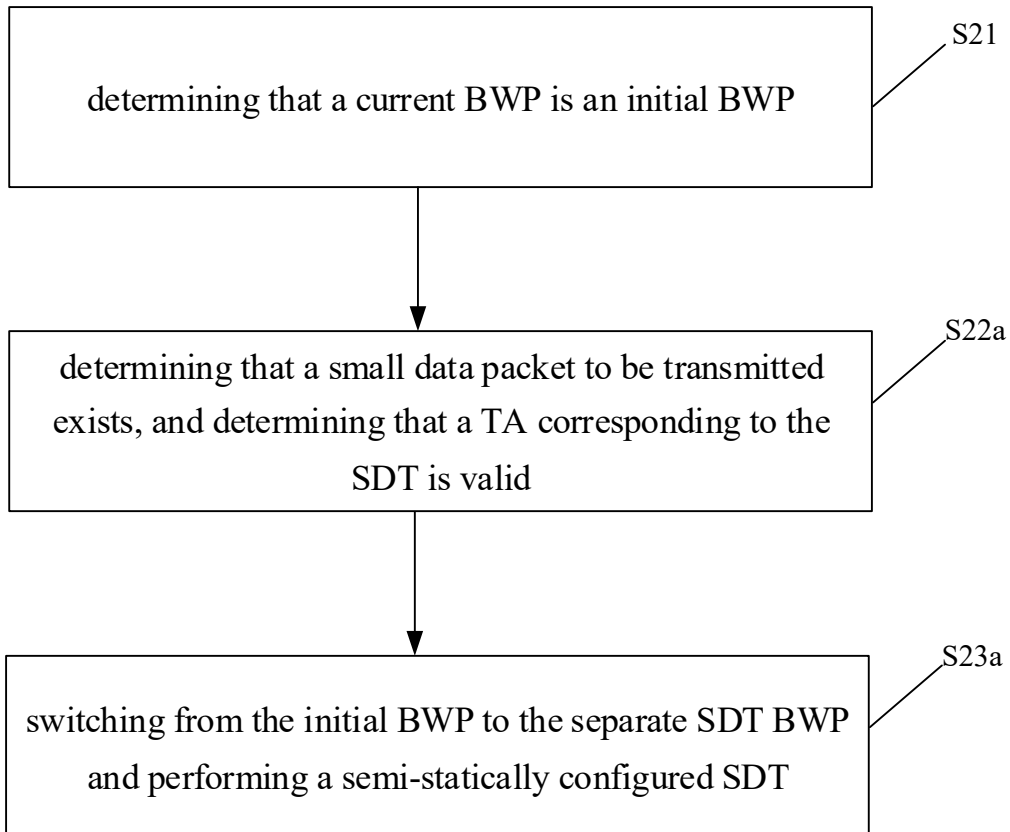


FIG. 5A



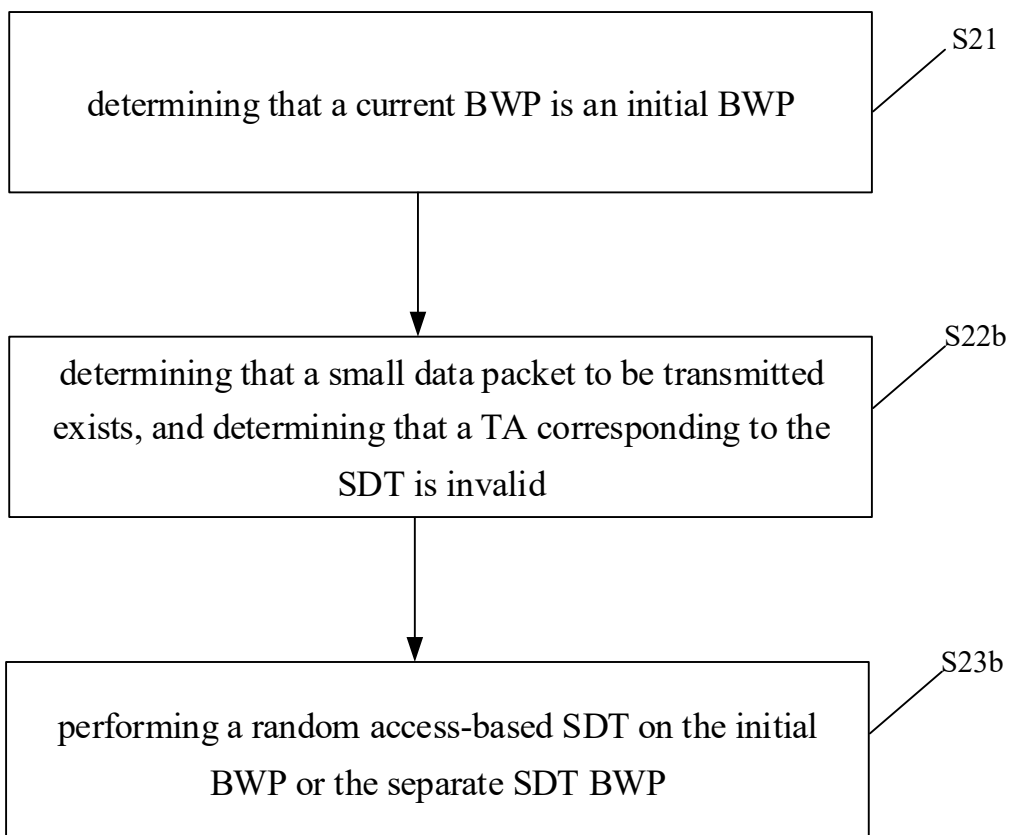


FIG. 5B

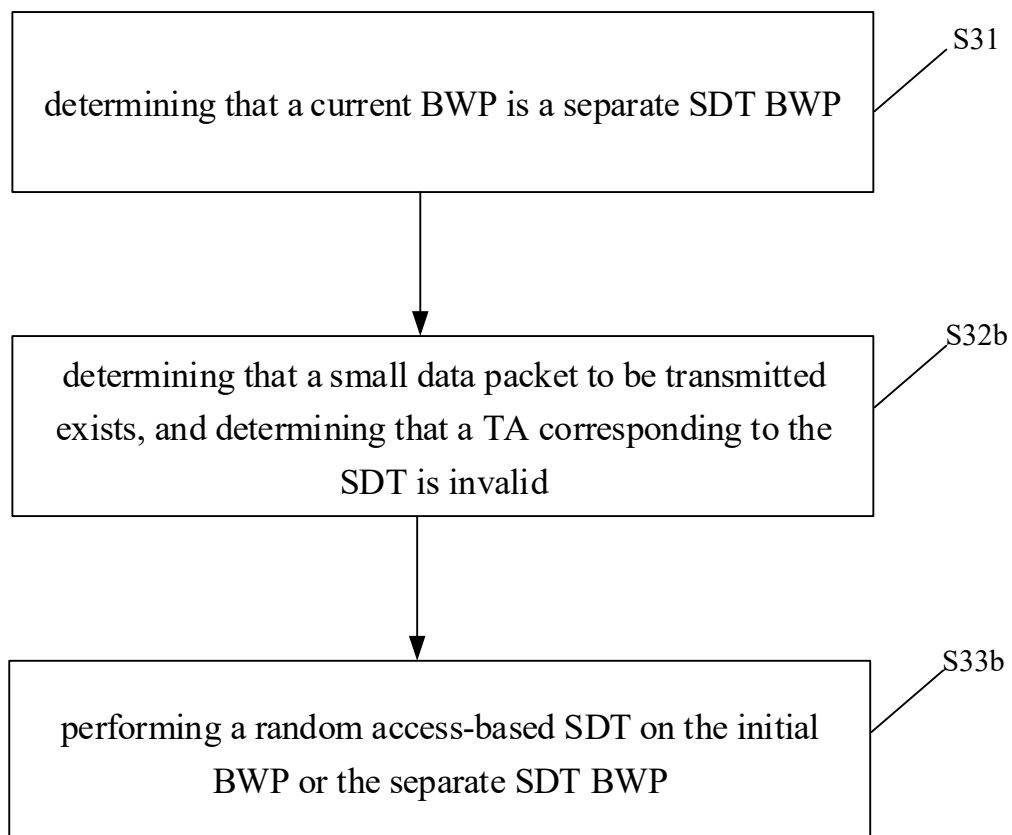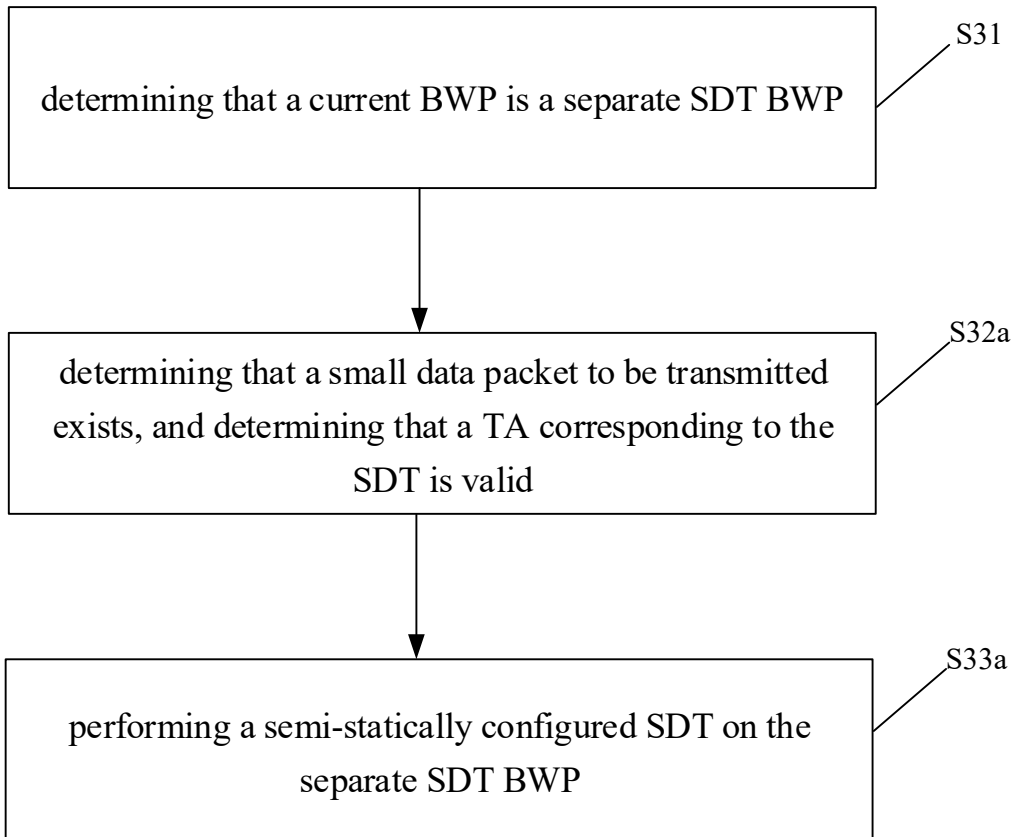

sending indication information, in which the indication information is used to indicate a target BWP to be switched to when entering an inactive state from a connected state, and the target BWP includes an initial BWP or a separate SDT BWP

S41

FIG. 7

100

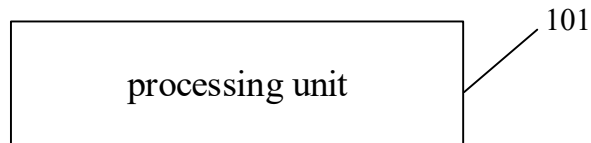


FIG. 8

200

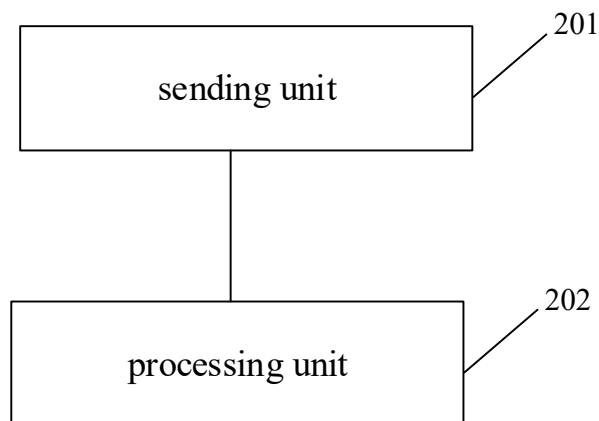


FIG. 9

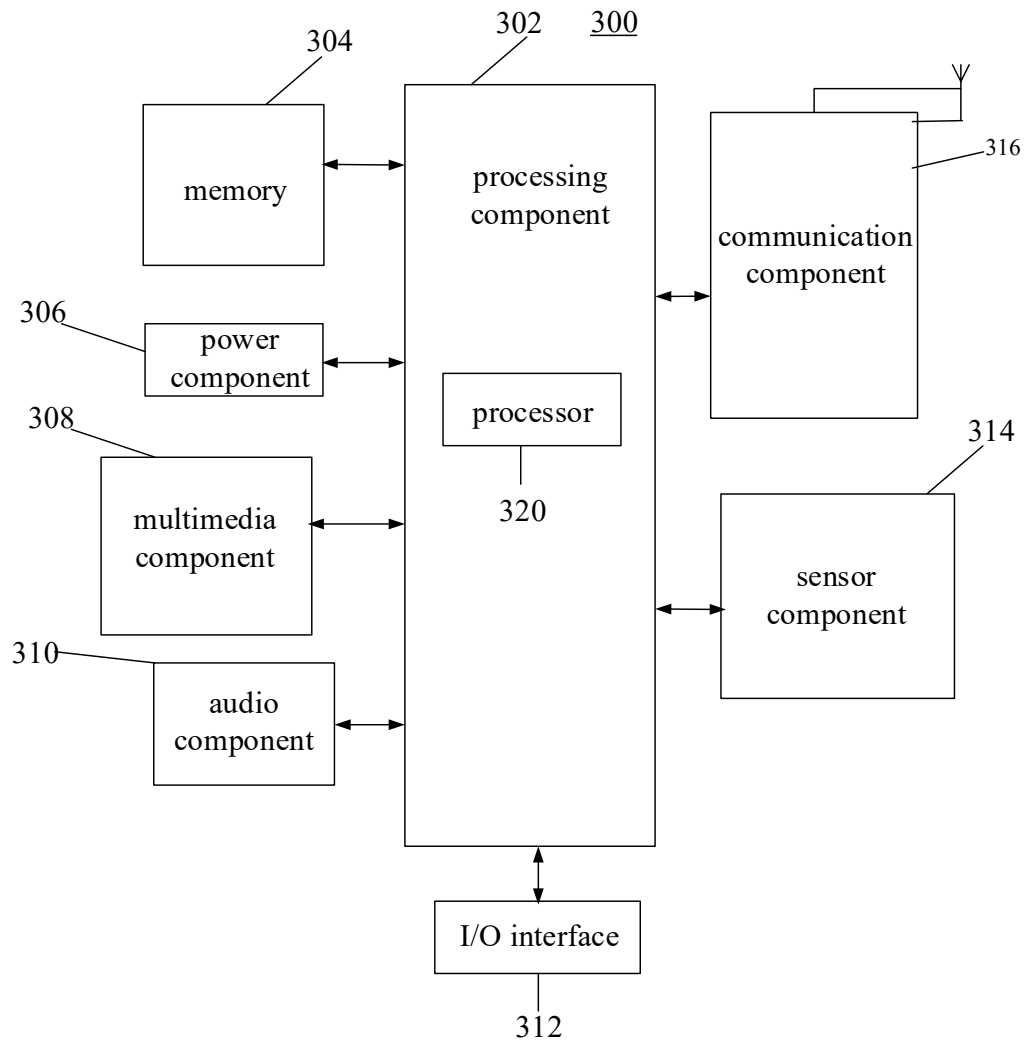


FIG. 10

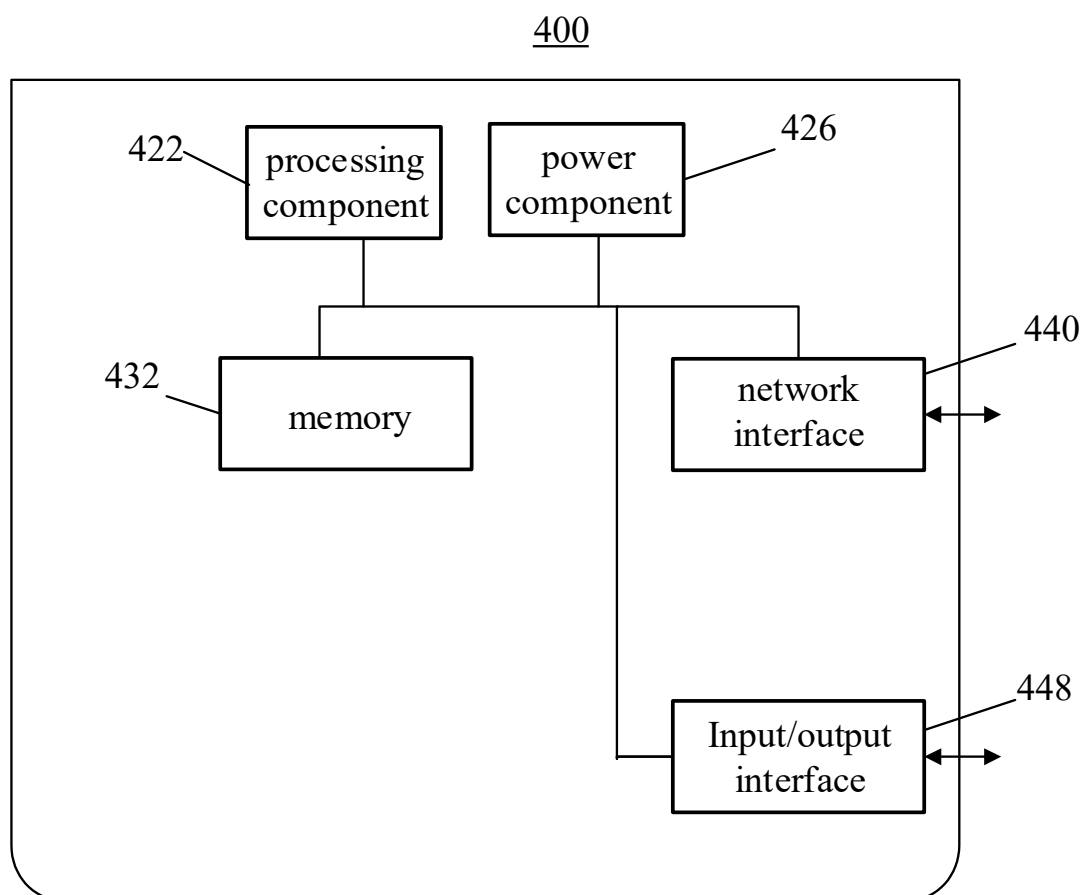


FIG. 11