

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
06 January 2022 (06.01.2022)



(10) International Publication Number
WO 2022/005878 A1

(51) International Patent Classification:
B23P 15/14 (2006.01) *C23C 16/455* (2006.01)

(21) International Application Number:
PCT/US2021/038982

(22) International Filing Date:
24 June 2021 (24.06.2021)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/705,522 01 July 2020 (01.07.2020) US

(71) Applicant: **LAM RESEARCH CORPORATION**
[US/US]; 4650 Cushing Parkway, Fremont, California
94538 (US).

(72) Inventor: **ALTECOR, Aleksey V.**; 260 Springtree Lane,
West Linn, Oregon 97068 (US).

(74) Agent: **SCHEER, Bradley W.** et al.; Schwegman Lund-
berg & Woessner, P.A., P.O. Box 2938, Minneapolis, Min-
nesota 55402 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: TOOL AND METHOD FOR CHANDELIER SHOWERHEAD INSTALLATION

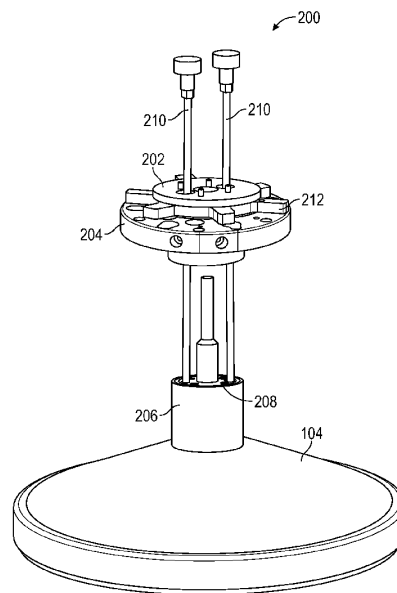


FIG. 2

(57) Abstract: An alignment device is provided to draw two components together in an aligned configuration. An example alignment device comprises a planetary gear set including a ring gear and at least two planetary gears and one or more side plates for supporting the gears. Each of the planetary gears includes an aperture sized to receive a threaded fastener for engagement with a respective threaded rod that is engaged with one of the two components, wherein rotation of the ring gear imparts rotational movement to the threaded fasteners to cause synchronized advancement of the alignment device along the threaded rods.

[Continued on next page]



WO 2022/005878 A1

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*