



(43) International Publication Date
12 February 2015 (12.02.2015)

- (51) International Patent Classification:
B30B 11/00 (2006.01) *B22F 3/18* (2006.01)
B30B 11/18 (2006.01)
- (21) International Application Number:
PCT/EP2014/066809
- (22) International Filing Date:
5 August 2014 (05.08.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13179929.8 9 August 2013 (09.08.2013) EP
- (71) Applicant: **XTRUTECH LTD.** [GB/GB]; 710 Lowfield Drive, Centre 500, Wolstanton, Newcastle under Lyme, Staffordshire ST5 0UU (GB).
- (72) Inventors: **WILBURN, Stephen Raymond**; 38 Rockcliffe, South Shields, Tyne and Wear (GB). **MORGAN, Andrew Robert**; 14b Hawthorn Gardens, Stargate, Gateshead, Tyne and Wear (GB).
- (74) Agents: **DE VRIES & METMAN** et al.; Overschiestraat 180, NL-1062 XK Amsterdam (NL).


(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A METHOD OF COMPACTION OF A POWDER AND A ROLLER COMPACTION DEVICE

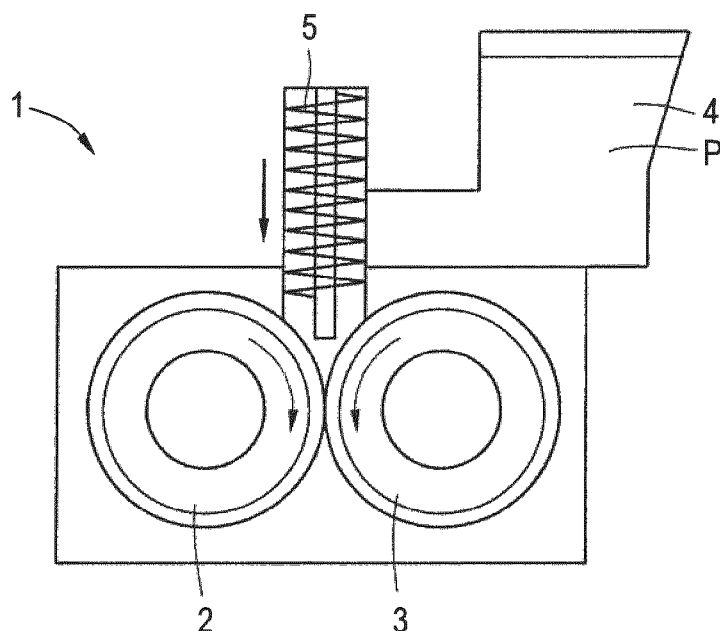

(57) Abstract: In a method of compaction of a powder (P) by means of nip rollers (2, 3) the powder (P) is transported at a supply speed to the nip rollers (2, 3) and friction between at least one of the nip rollers (2, 3) and the powder (P) at said nip roller (2, 3) is determined. Depending on the friction the rotational speed of at least one of the nip rollers (2, 3) is adjusted. The supply speed of the powder (P) to the nip rollers (2, 3) as well as the distance between the nip rollers (2, 3) are maintained substantially constant.

Fig.1