

1/11

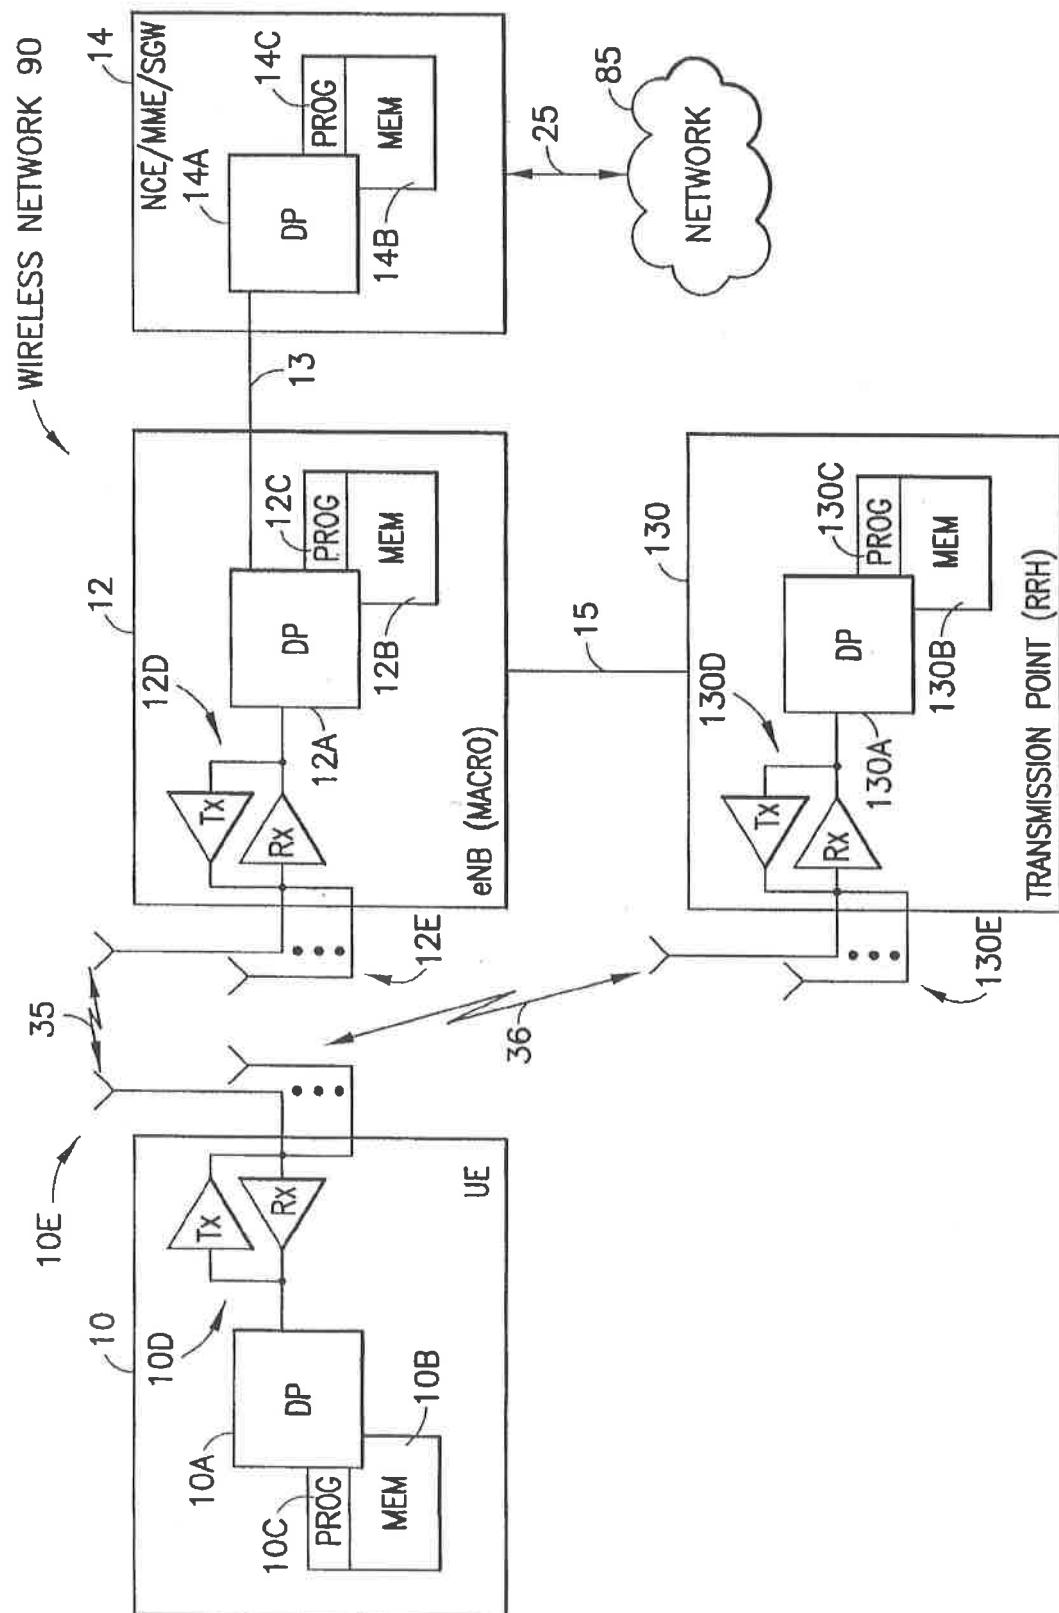


FIG. 1

2/11

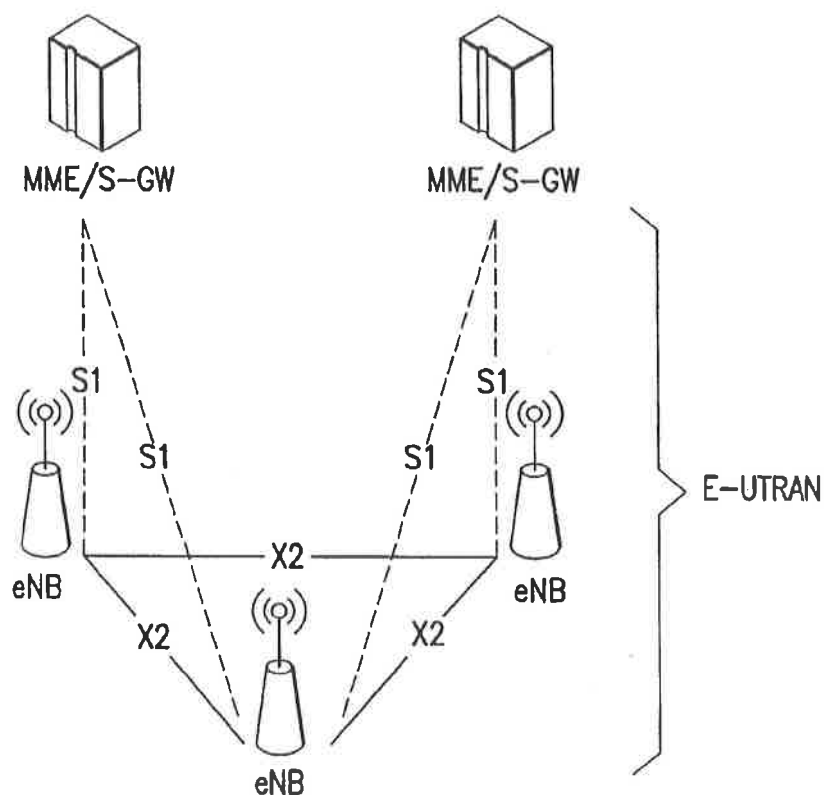


FIG.2

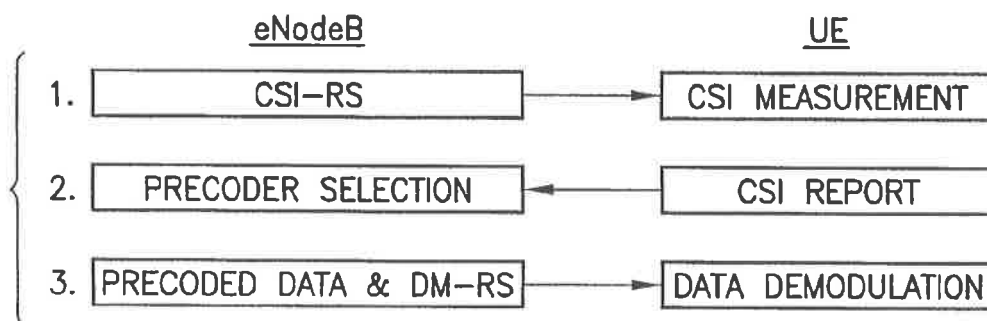


FIG.3

3/11

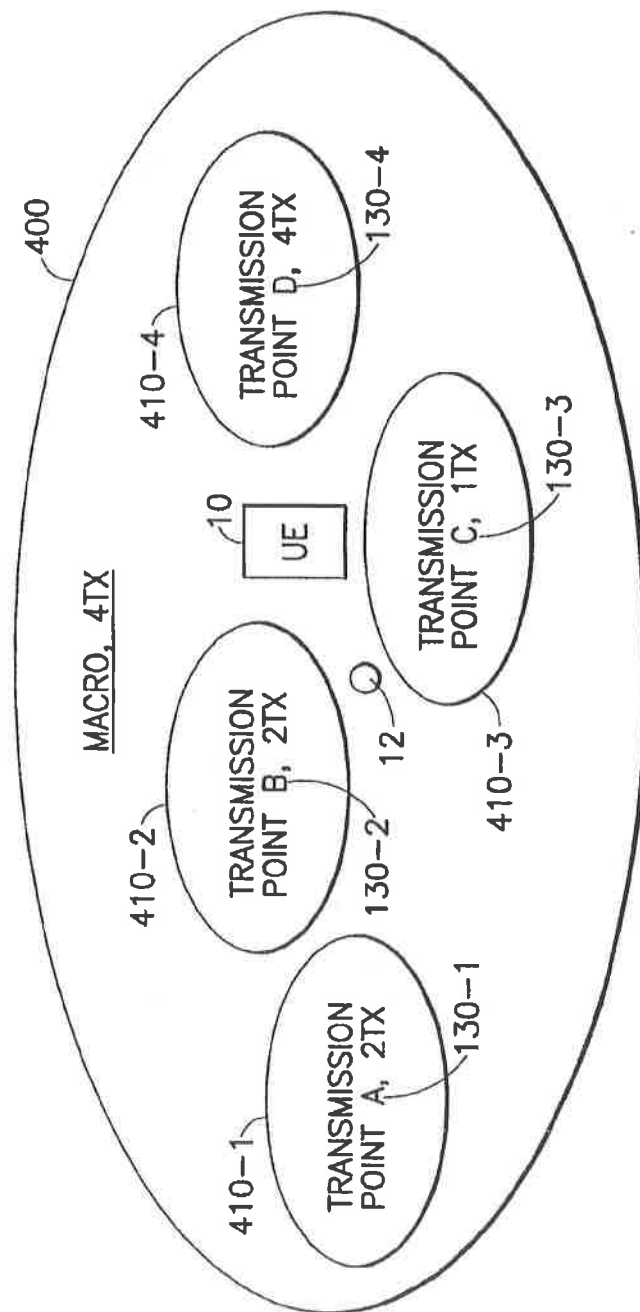


FIG.4

4/11

CSI-RS CONFIGURATION #	0	1	2	3	4	5	6	7	8	9	20	21	22	23	24	25
MUTING PATTERN (BITMAP "ZeroPowerCSI-RS")	0	0	1	1	0	0	0	1	0	1	0	0	0	0	0	0
UE REPORT FOR QUALITY OF MUTED CSI-RS AND UE- SPECIFIC CONFIGURED CSI-RS			NOT OK	OK		OK		OK		OK						

CORRESPONDS TO CONFIGURED
CSI-RS - e.g. MACRO

T.P.A. T.P.B. T.P.C. T.P.D.

CSI-RS CONFIGURATIONS
APPLICABLE FOR TDD ONLY

CONFIGURED UE-SPECIFIC
CSI-RS REPORT
(e.g. MACRO)

510

520-1

515

FIG.5

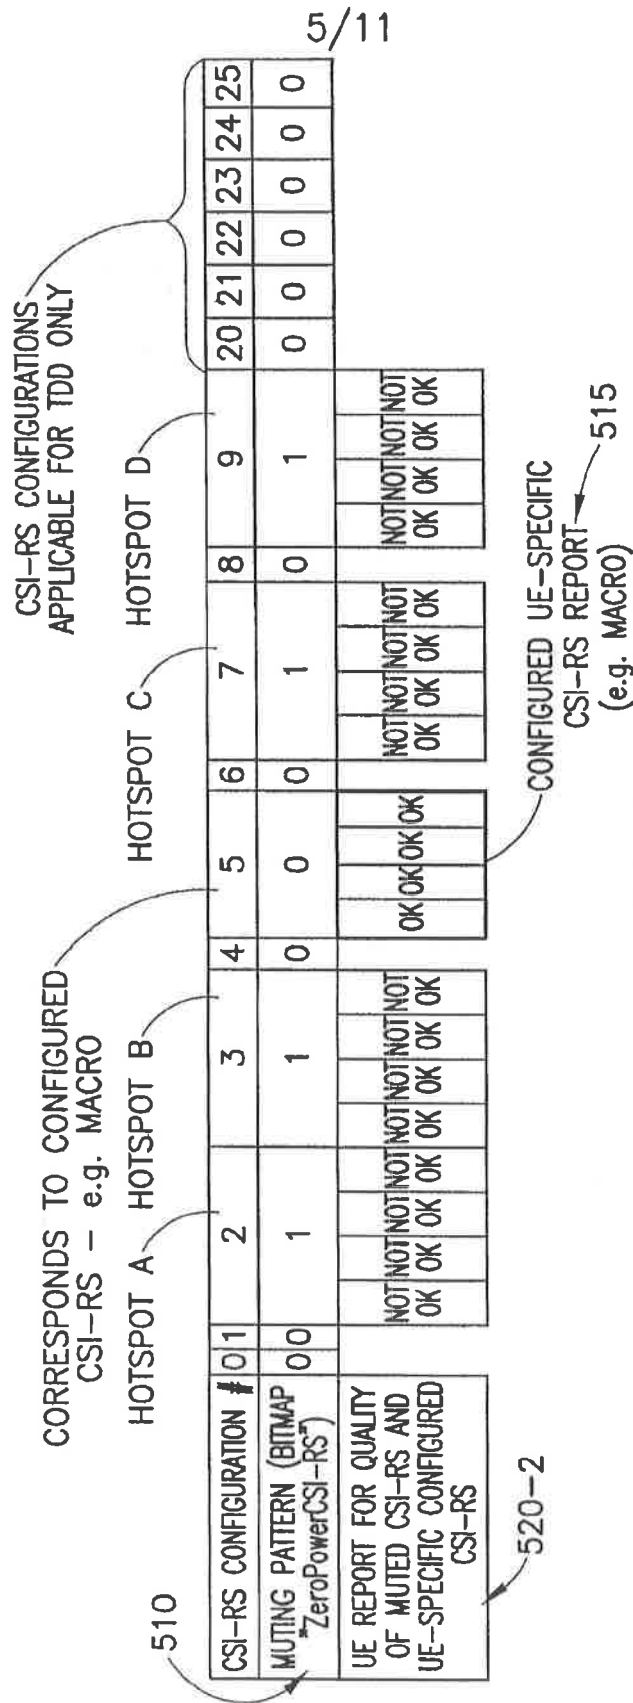


FIG.6

6/11

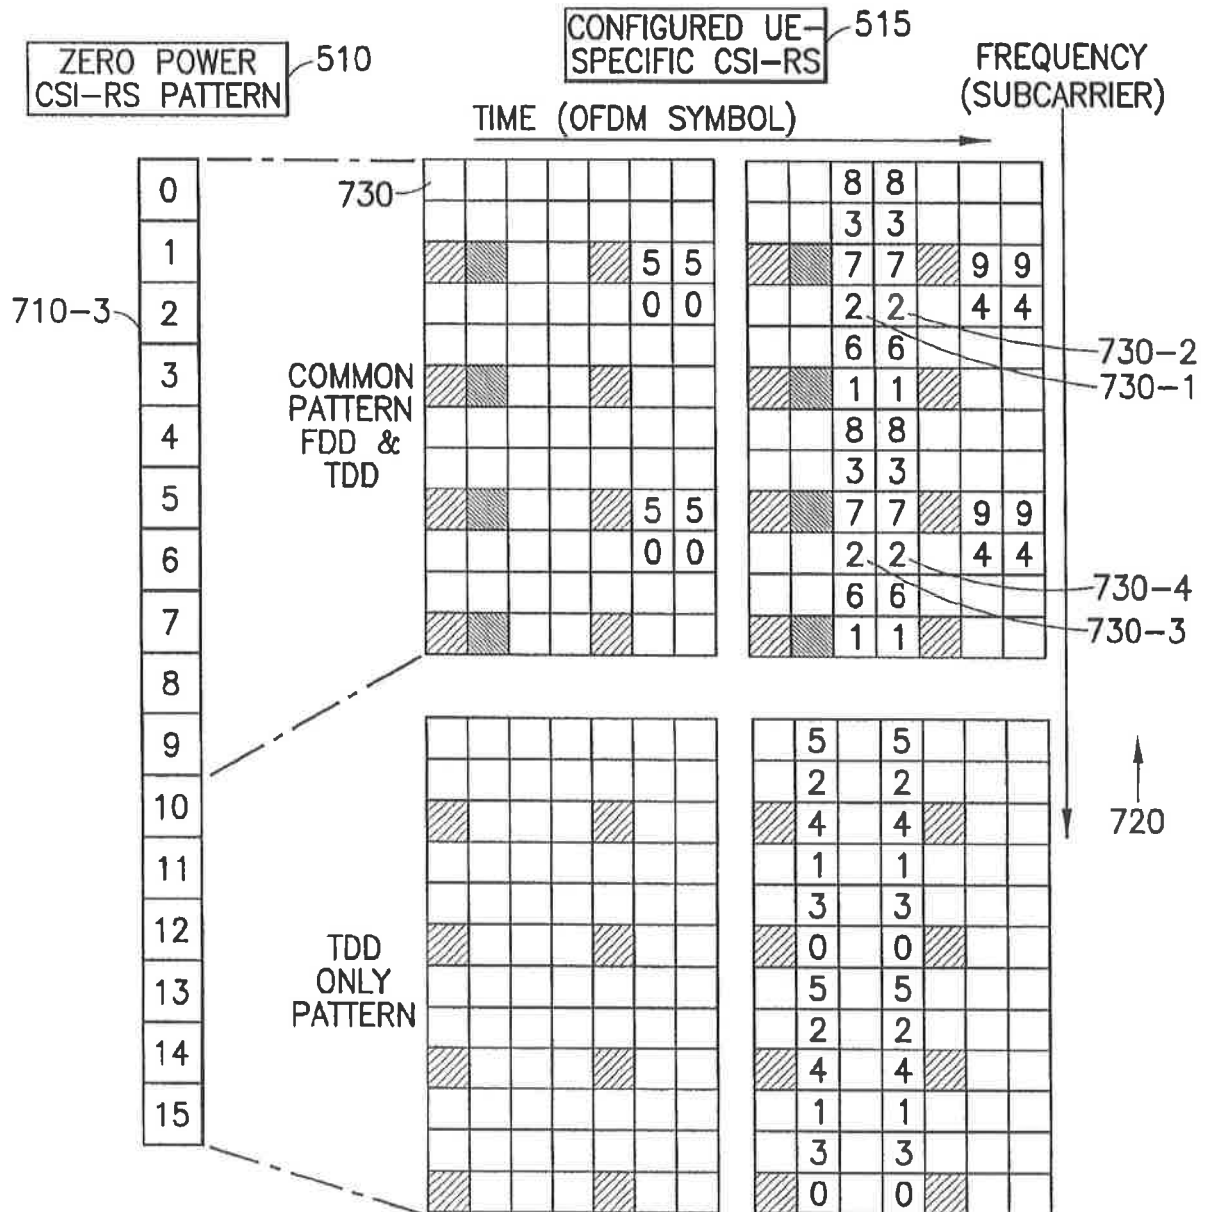


FIG.7

7/11

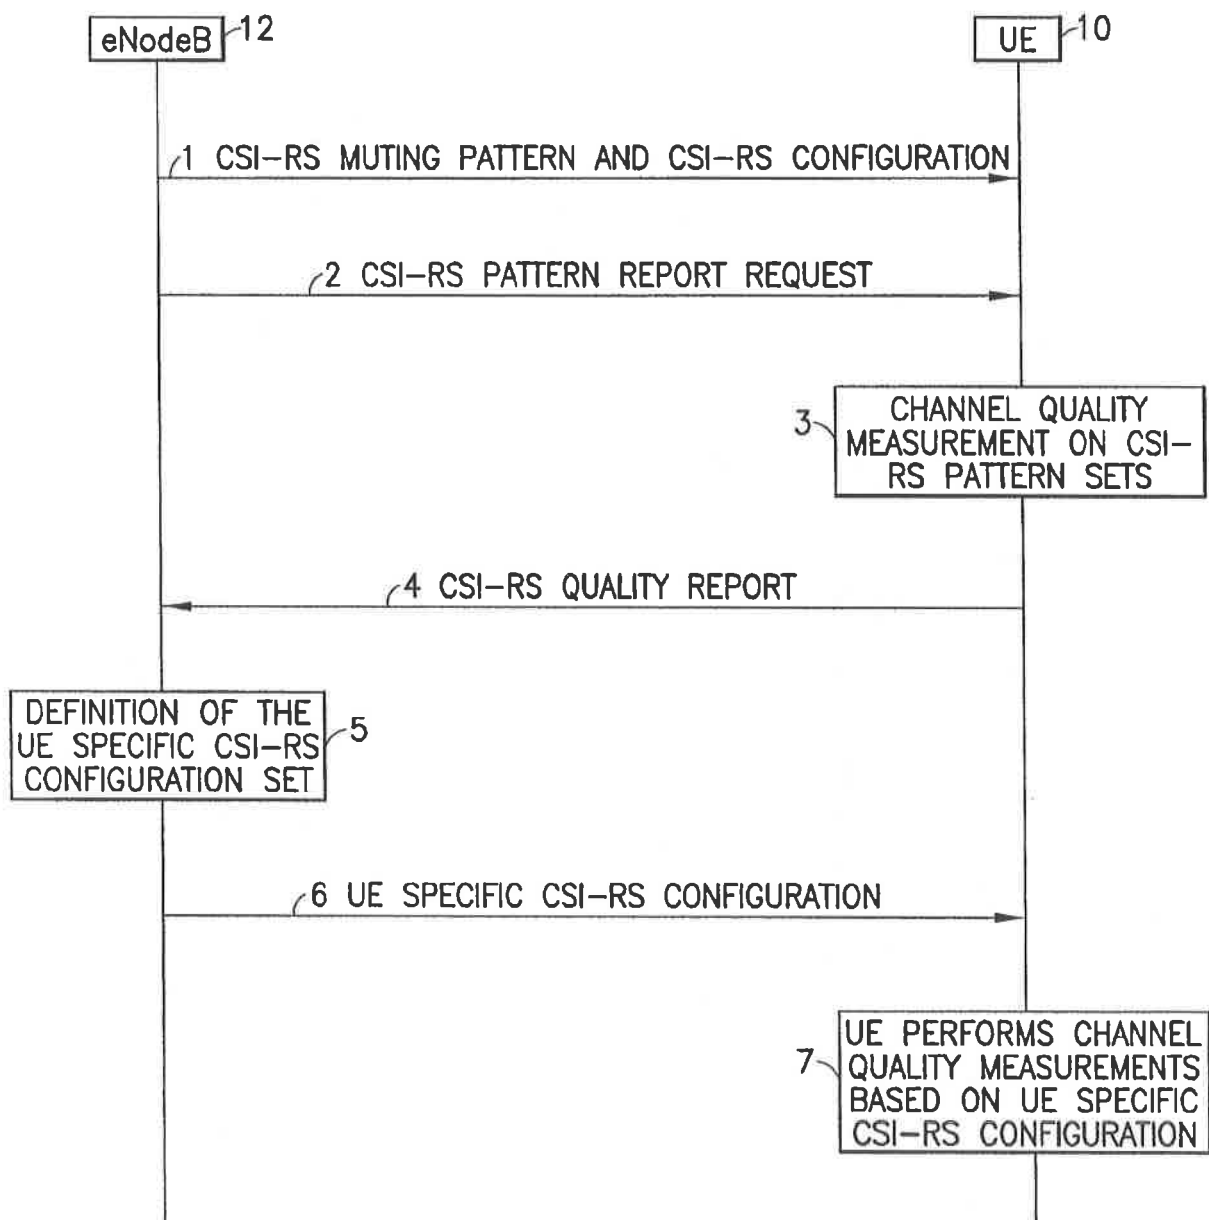


FIG.8

8/11

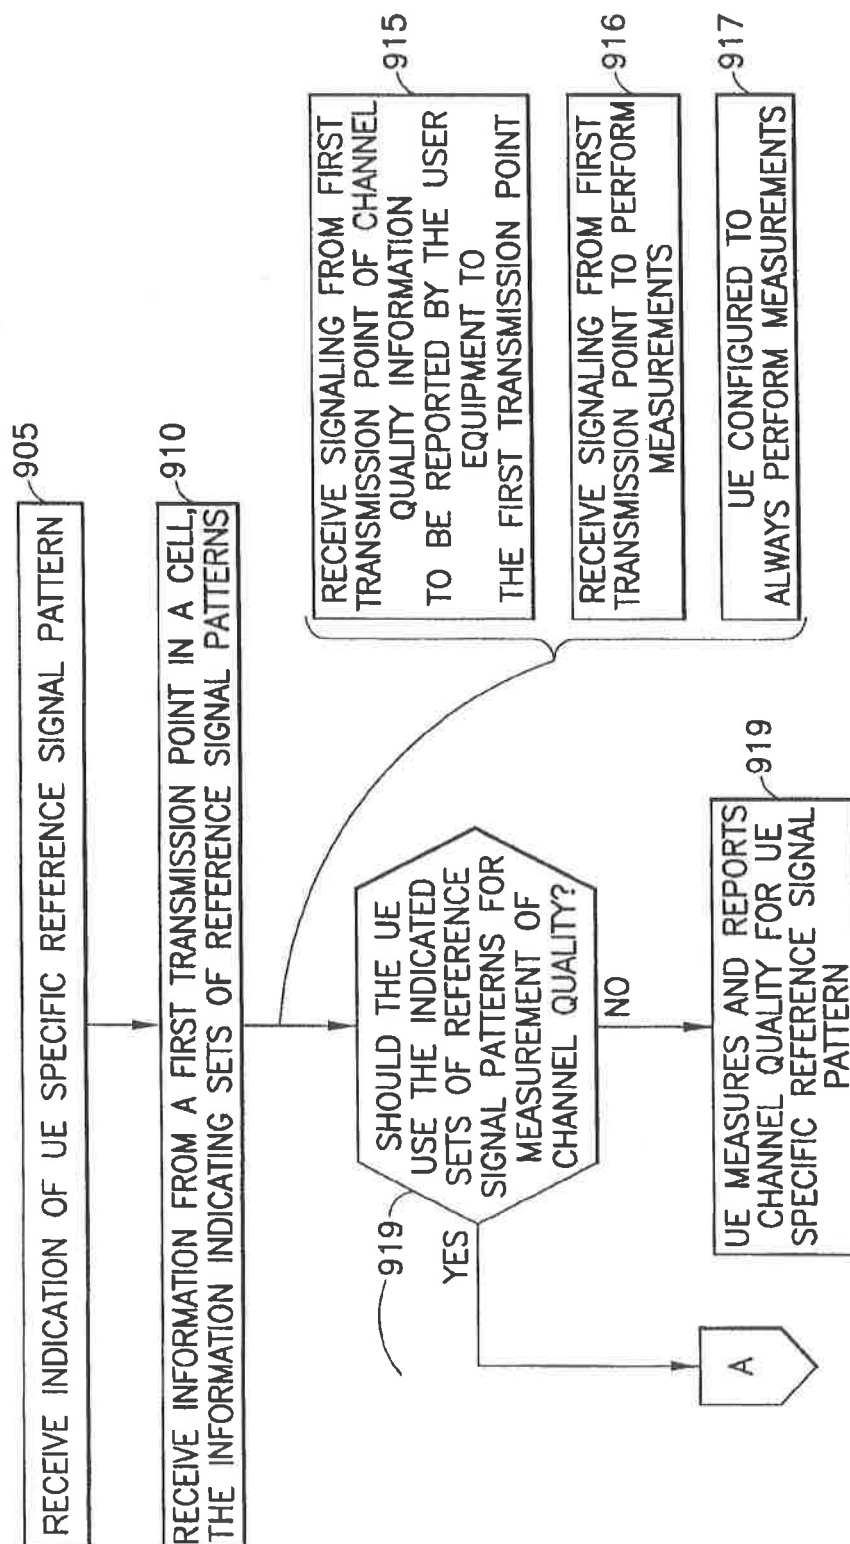


FIG. 9

9/11

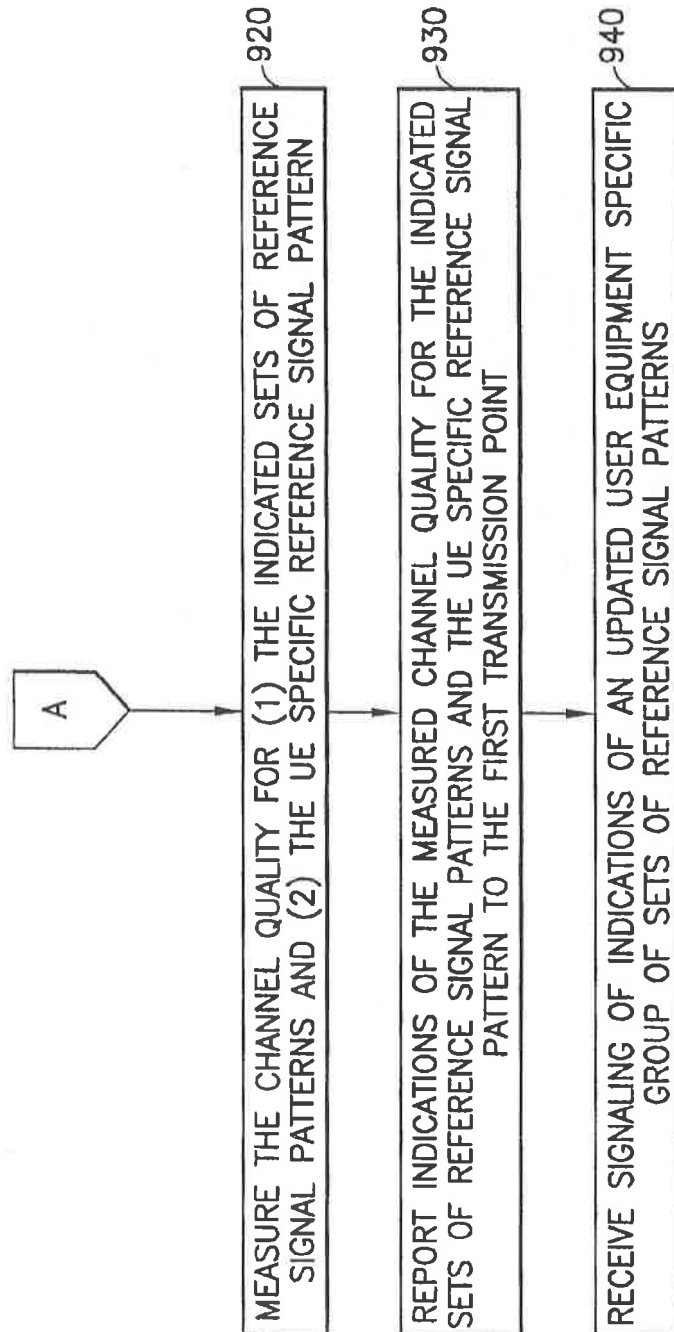


FIG.9 (Continued)

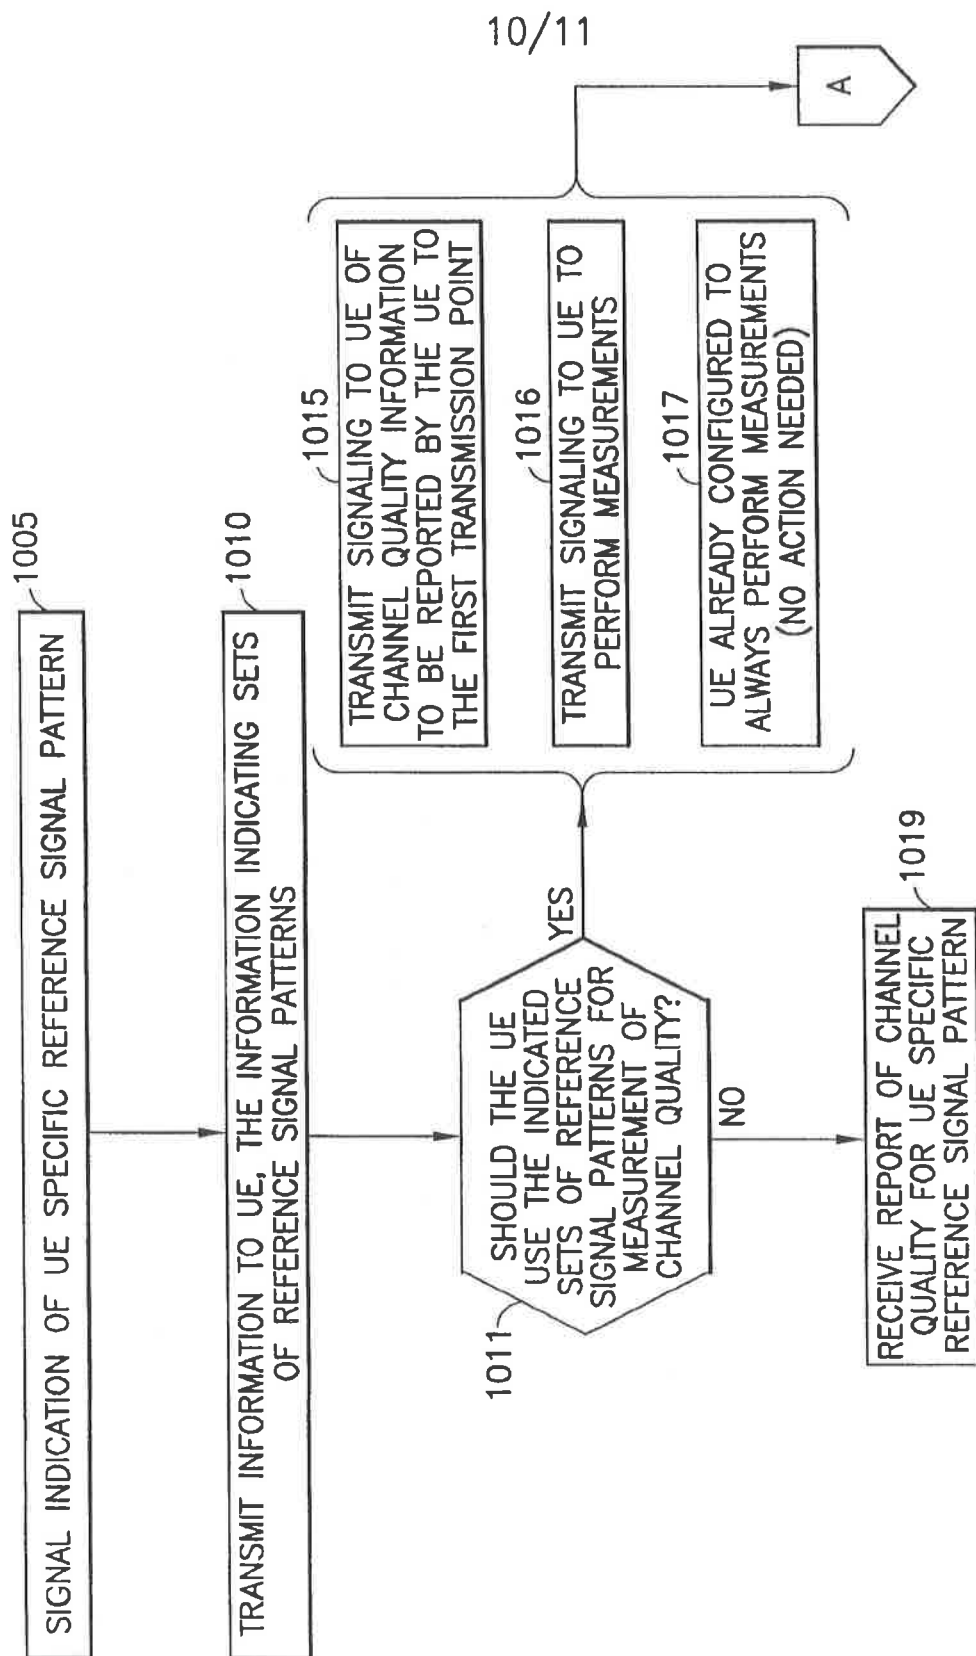


FIG.10

11/11

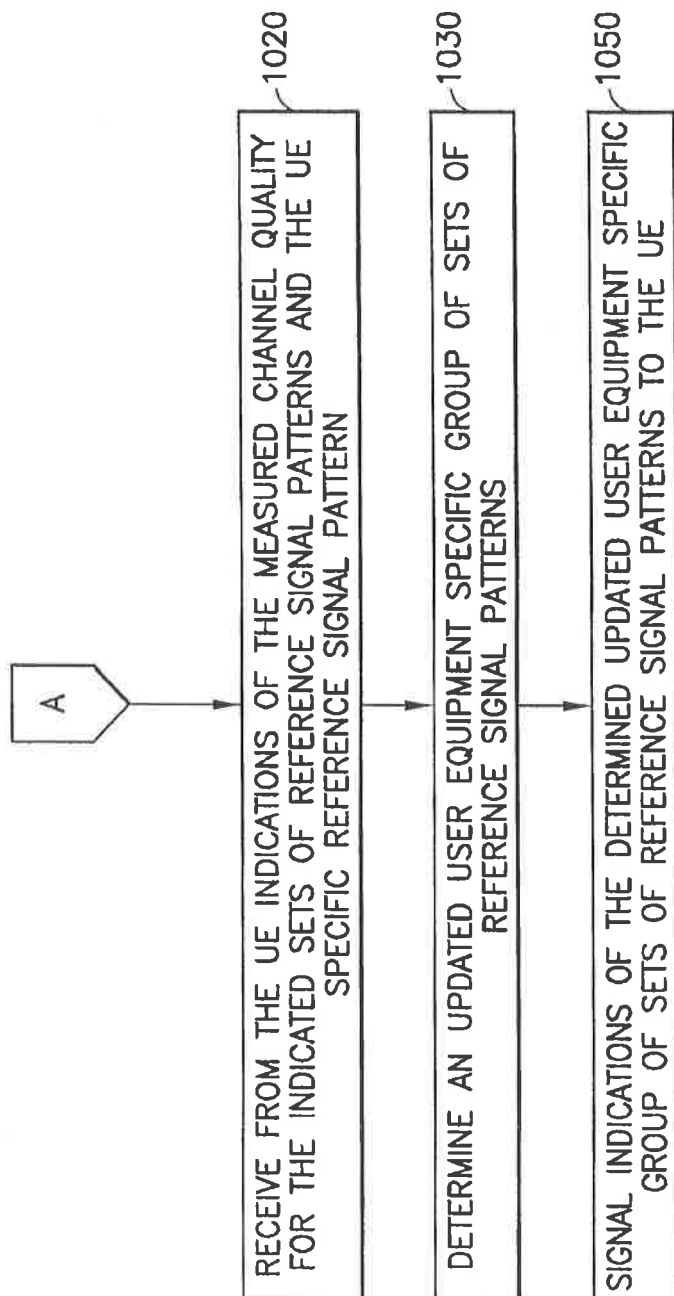


FIG.10 (Continued)