

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 February 2003 (13.02.2003)

PCT

(10) International Publication Number
WO 03/011778 A3

(51) International Patent Classification⁷: **C03B 35/18**,
B21B 39/00

(21) International Application Number: PCT/US02/24102

(22) International Filing Date: 30 July 2002 (30.07.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/308,780 30 July 2001 (30.07.2001) US

(71) Applicant: **GLOBAL CONSULTING INC.** [US/US];
123 Shannon Avenue, New Castle, PA 16102 (US).

(72) Inventor: **HART, Charles, M.**; 123 Shannon Avenue,
New Castle, PA 16102 (US).

(74) Agent: **TYRPAK, Michele, M.**; Hudak & Shunk Co.,
L.P.A., 7 West Bowery Street, Suite 808, Akron, OH 44308
(US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

(88) Date of publication of the international search report:
21 August 2003

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: TIGHTENING A FIBER ROLL COVER

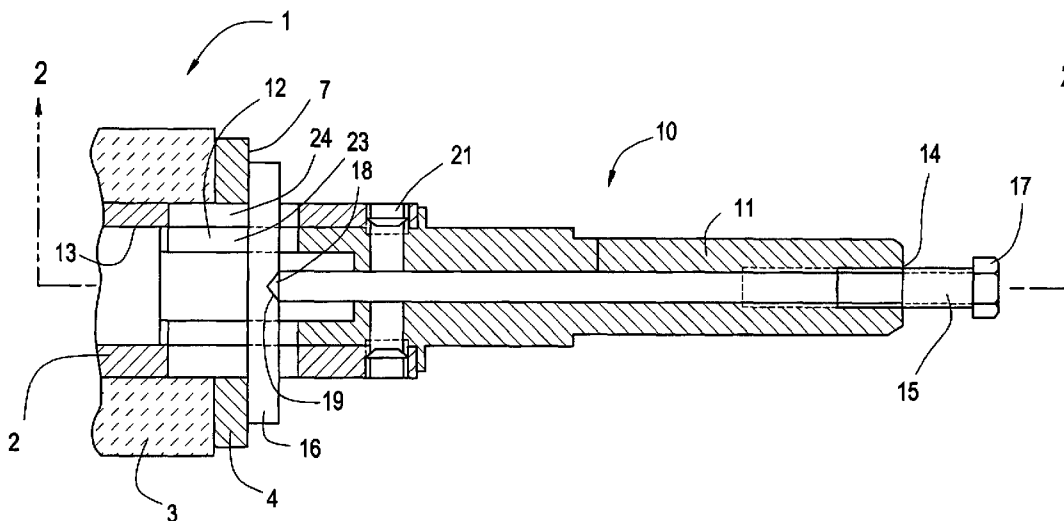

(57) **Abstract:** Rolls for generally conveying sheets, such as of steel or glass over a roller typically have a steel mandrel and fiber-containing roll cover (1), with the fiber roll cover (3) pressed between end plates (4). In a roll end assembly including the end plates there is now provided an axial shaft (11) beyond the end plate. The shaft incorporates a roll compression means. The compression means includes a compression element (16) which element engages the end plate. Pressure from the compression means, which may be exerted from beyond the shaft, can thereby be transmitted to the fiber roll.



WO 03/011778 A3