



(51) International Patent Classification:

B29C 41/02 (2006.01) E03F 5/02 (2006.01)
B29C 41/04 (2006.01) E03F 5/04 (2006.01)
B29C 41/48 (2006.01) F16L 9/12 (2006.01)

(21) International Application Number:

PCT/EP2009/064327

(22) International Filing Date:

29 October 2009 (29.10.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1036127 29 October 2008 (29.10.2008) NL
1037148 24 July 2009 (24.07.2009) NL

(71) Applicant (for all designated States except US): **WAVIN B.V.** [NL/NL]; Stationsplein 3, NL-8011 CW Zwolle (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **VAN DIJK, Berned Jan** [NL/NL]; Schuineslootweg 138, NL-7777 ST Schuinesloot (NL). **ELZINK, Willem Johan** [NL/NL];

De Aak 144, NL-7701 LD Dedemsvaart (NL). **MADSEN, Frede** [DK/DK]; Vestervangsvej 24, DK-8450 Hammel (DK). **ALFERINK, Franciscus Johannes Maria** [NL/NL]; Schoonhetenseweg 2, NL-8106 AE Marienheem (NL). **JAGER, Harm Jantinus Marcel** [NL/NL]; Hoofdweg 32-a, NL-7676 AG Westerhaar-Vriezenveensewijk (NL). **BRÜMMER, Günter Bernhard** [DE/DE]; Gerhard-Hauptmann-Strasse 9, 49740 Haselünne (DE).

(74) Agents: **WIEDEMANN, Peter (HOFFMANN · EITLE)** et al.; Arabellastrasse 4, 81925 München (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) Title: METHOD AND MOULD ASSEMBLY FOR ROTATION MOULDING A PIPE PART WITH A SPIGOT END, AS WELL AS PIPE PART OBTAINED THEREWITH

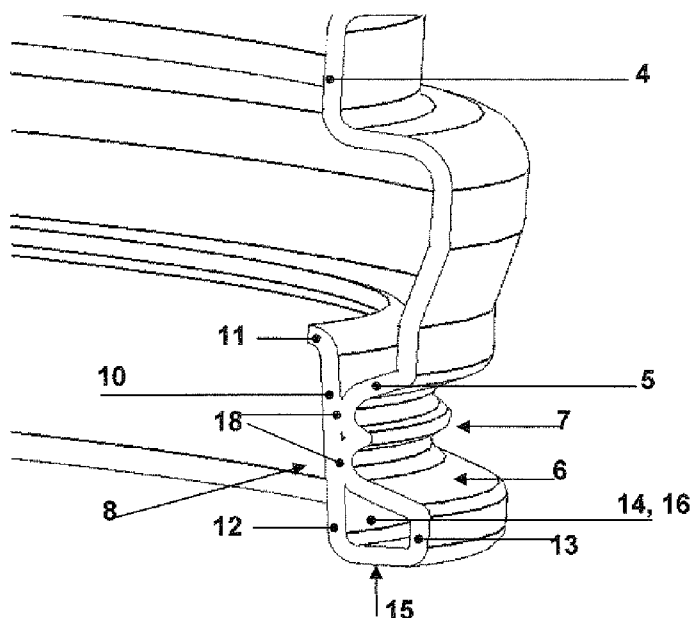


FIG. 2

(57) Abstract: The invention relates to a method and a mould assembly for rotation moulding a pipe part (1) comprising a main body (2) and a spigot end (3), the spigot (3) end having at least one dedicated section (5) with an outer contour (6) that in use is to effect a close fit with an external part. At least during cool-off A support structure (8) is provided in the pipe part (1), at least during cool-off of said part, to keep the dedicated section (5) into contact with the mould (22) so as to have the outer contour (6) of the dedicated section (5) conform to the inner contour of the mould (22). The support structure may become part of the pipe part during moulding.



(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (*Art. 21(3)*)
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (*Rule 48.2(h)*)

(88) Date of publication of the international search report:

29 July 2010