



(51) International Patent Classification:

F21V 17/00 (2006.01) *H01L 23/10* (2006.01)
H01L 23/043 (2006.01) *F21Y 101/02* (2006.01)

(21) International Application Number:

PCT/SG2010/000143

(22) International Filing Date:

9 April 2010 (09.04.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant (for all designated States except US):

AZTECH TECHNOLOGIES PTE LTD [SG/SG]; 31
Ubi Road 1, Aztech Building, Singapore 408694 (SG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MUN, Hong Yew**
[SG/SG]; 821 Old Holland Road, Singapore 278670
(SG). **LOW, Wei Chong** [SG/SG]; 11 Woodlands Drive
72, #01-31 Woodsvale, Singapore 738094 (SG).

(74) Agent: **GOH, Su Lin, Audrey**; Viering, Jentschura &
Partner LLP, P.O. Box 1088, Rochor Road, Singapore
911833 (SG).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: LIGHT EMTTING DIODE (LED) LIGHT

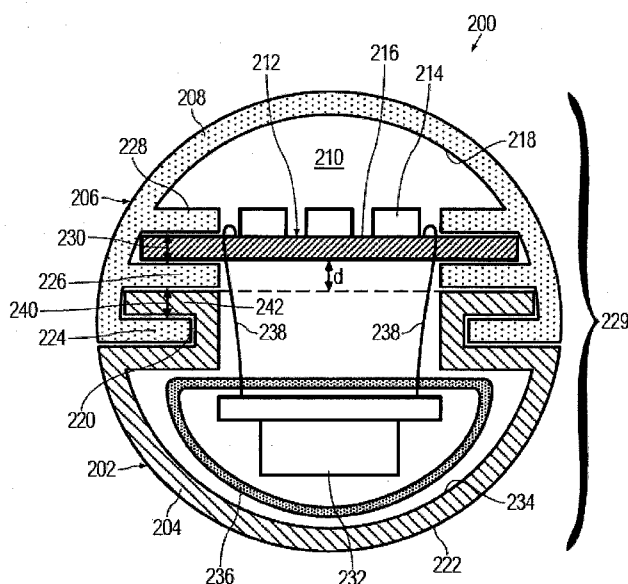


Figure 2

(57) Abstract: A light emitting diode (LED) light is provided. The LED light includes a conductive casing having a circumferential wall; a non-conductive casing having a circumferential wall, the non-conductive casing being engaged with the conductive casing to form a cavity; and a circuit board having at least one LED; wherein the circuit board is disposed in the cavity and is supported by the circumferential wall of the non-conductive casing.