



(51) International Patent Classification:

B65H 49/32 (2006.01) *B65H* 54/553 (2006.01)
B63B 35/03 (2006.01) *B65H* 67/00 (2006.01)
B63B 35/04 (2006.01) *F16L* 1/20 (2006.01)

(21) International Application Number:

PCT/GB2015/052715

(22) International Filing Date:

21 September 2015 (21.09.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1416961.9 25 September 2014 (25.09.2014) GB

(71) Applicant: **ALFRED CHEYNE ENGINEERING LIMITED** [GB/GB]; Cheyne House, Towie Barclay Works, Turriff, Aberdeenshire AB53 8EN (GB).

(72) Inventor: **NADAGOUDA, Nishant**; c/o Alfred Cheyne Engineering Limited, Cheyne House, Towie Barclay Works, Turriff Aberdeenshire AB53 8EN (GB).

(74) Agent: **LINCOLN IP**; 9 Victoria Street, Aberdeen, Aberdeenshire AB10 1XB (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

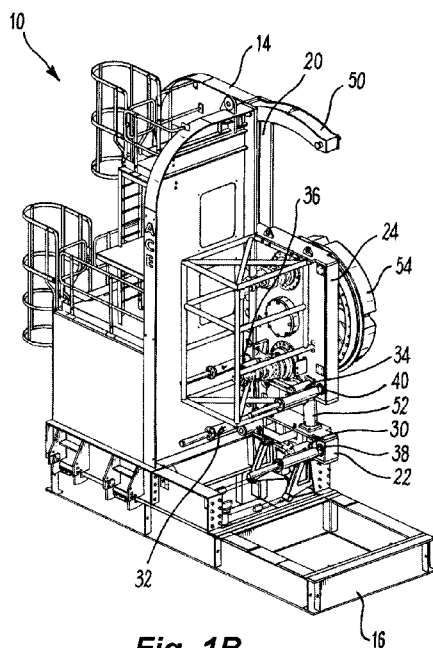
(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: REEL DRIVE ASSEMBLY

**Fig. 1B**

(57) Abstract: A modular reel drive assembly comprises two reel drive tower modules (12, 14), a reel hub adapter (54) and a reel hub adapter support module (22, 24). The hub adapter support module (22, 24) comprises at least one support pin which is configured to be movable between a storage position in which the at least one support pin is not aligned with at least one aperture (38, 39, 40, 41) on the hub adapter support module (22, 24) and an operational position in which the support pin is aligned with at least one aperture (38, 39, 40, 41) on the hub adapter support module (22, 24).



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*