



(51) International Patent Classification:
A61M 16/04 (2006.01)

(21) International Application Number:
PCT/US2010/022248

(22) International Filing Date:
27 January 2010 (27.01.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/362,214 29 January 2009 (29.01.2009) US

(71) Applicant (for all designated States except US): **NELL-COR PURITAN BENNETT LLC** [US/US]; 6135 Gunbarrel Avenue, Boulder, Colorado 80301 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MACAN, Aaron** [US/US]; 3436 Widefield Court, Loveland, Colorado 80538 (US). **MEHTA, Dhairya** [US/US]; 7718 Lincoln Avenue, Skokie, Illinois 60077 (US). **HAYMAN, Sarah**

[US/US]; 4800 Osage Drive, #1, Boulder, Colorado 80303 (US). **NEAL, Jon** [US/US]; 3518 Deer Creek Drive, Parker, Colorado 80138 (US). **BEHLMAYER, Mark** [US/US]; 2600 S. Rock Creek Parkway, #1-201, Superior, Colorado 80027 (US).

(74) Agent: **MAJORS, Timothy**; 6135 Gunbarrel Avenue, Boulder, Colorado 80301 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: MEDICAL DEVICE AND TECHNIQUE FOR USING THE SAME

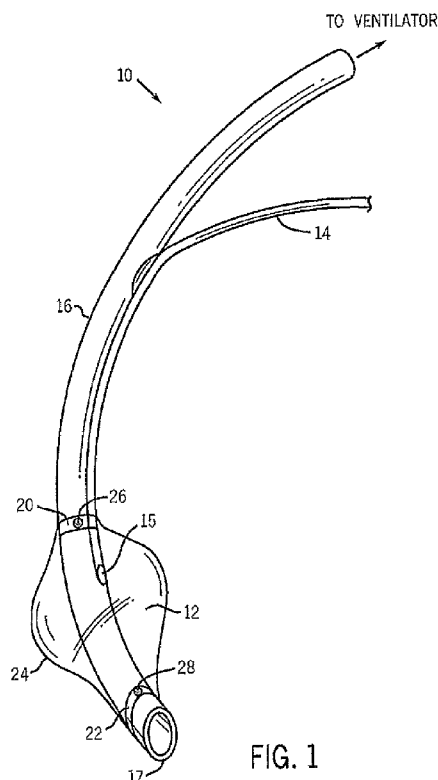


FIG. 1

(57) Abstract: An inflatable balloon cuff (12) may be adapted to seal a patient's trachea when associated with an endotracheal tube (10). These cuffs (12) may include indicia (26,28) that facilitate attachment of the cuff (12) relative to the tube (10) to reduce manufacturing variability for such characteristics as rotational and length alignment. Such indicia (26,28) may include protrusions that are formed in the wall of the cuff collars (20,22) or may include visual indicators, e.g., colorimetric or shape-wise indicators. Cuffs (12) with improved attachment relative to the tube (10) may have increased sealing performance.



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, **Published:**

TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*