



(51) International Patent Classification:
A45C 5/14 (2006.01)

(21) International Application Number:
PCT/GB2010/050158

(22) International Filing Date:
2 February 2010 (02.02.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1000851.4 20 January 2010 (20.01.2010) GB

(71) Applicant (for all designated States except US): **LANDOR & HAWA INTERNATIONAL LTD** [GB/GB];
Riverside House, River Way, Harlow, Essex CM20 2DW (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SELVI, Sedat** [GB/GB]; 235 Princess Park Manor, Friem Barnet, London N11 3FS (GB).

(74) Agents: **HLBBSHAW** et al.; Merlin House, Falconry Court, Baker's Lane, Epping, Essex CM16 5DQ (GB).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: IMPROVED LUGGAGE CONSTRUCTION

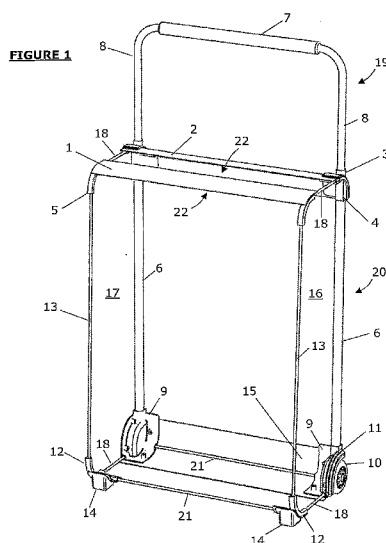

(57) Abstract: The present invention provides an article of luggage and a method of construction thereof, comprising a shape defining framework structure, wherein the shape defining framework structure comprises two length defining members, wherein at one end of each length defining member a portion of a towing handle is telescopically incorporated and at the opposed end is located a wheel, wherein a substantial portion of the wheel is housed within the shape defining framework structure. Preferably the wheels are located at corners of the suitcase and the suitcase further comprises a shape defining portion which "rounds off" the sharp edges of the case and thus providing a more robust construction. Furthermore, having the telescopic handle located in the same vertical plane as the wheel housing makes towing more stable.



WO 2011/089376 A2