

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 February 2001 (01.02.2001)


PCT

(10) International Publication Number
WO 01/07730 A1

- (51) International Patent Classification⁷: E04G 1/15, 1/26, 3/06, 5/04
- (21) International Application Number: PCT/NZ00/00142
- (22) International Filing Date: 28 July 2000 (28.07.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
336959 28 July 1999 (28.07.1999) NZ
PQ 3192 27 September 1999 (27.09.1999) AU
- (71) Applicant (for all designated States except US): WUI LOONG SCAFFOLDING WORKS CO LTD [—/—]; Room 601-5, 6th Floor, Pacific Link Tower Southmark, 11 Yip Hing Street, Aberdeen, Wong Chuk Hang, Hong Kong (**).
- (71) Applicant (for SL only): THOMSON, KEITH, Charles [NZ/NZ]; 32 Tinakori Road, Wellington (NZ).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): SO, Yu, Shing [CN/CN]; Room 601-5, 6th Floor, Pacific Link Tower Southmark, 11 Yip Hing Street, Aberdeen, Wong Chuk Hang, Hong Kong (CN).
- (74) Agents: CALHOUN, Douglas, C. et al.; A J Park, Huddart Parker Building, 6th Floor, Post Office Square, P.O. Box 949, Wellington 6015 (NZ).
- (81) Designated States (national): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KR (utility model), KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European

[Continued on next page]

(54) Title: SCAFFOLDING

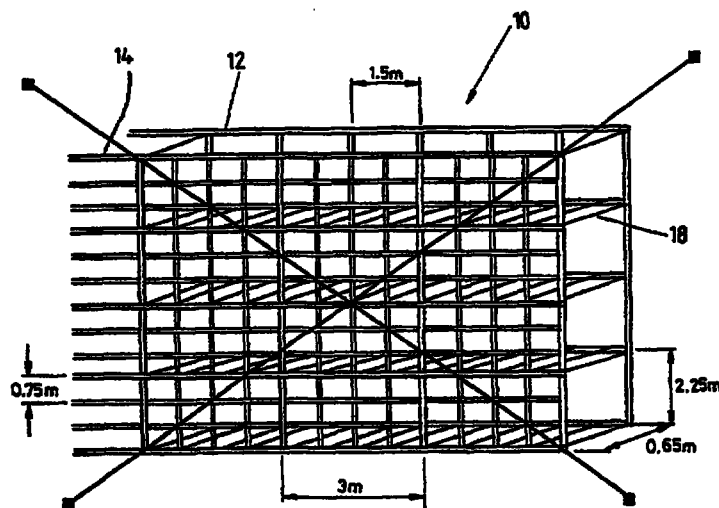

(57) Abstract: A scaffolding structure (10) having a two dimensional inner grid (12) interconnected with a two dimensional outer grid (14). Additional bamboo members (25, 27) are secured on the outer grid (14) such that the interstices defined by the load bearing members (24, 26) and the bamboo members of the outer grid (14) are smaller than the interstices defined by the load bearing members (20, 22) of the inner grid (12). An anchoring device (50b) to anchor the scaffolding structure (10) to the building (15) includes an arm (52b) and an anchoring member (50c). The anchoring member (50c) has a first leg in the form of a bar or rod which is alignable such that the first leg extends parallel to the longitudinal axis of the arm with the remote end of the first leg extending beyond the arm (52b). The scaffolding structure further comprises platforms (102b) which have an access opening (127) for access to a lower region of the scaffold (10), and a ladder (120) disposed for access by a worker through the access opening (127).

WO 01/07730 A1



patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *With international search report.*