



(51) International Patent Classification:
G06F 17/50 (2006.01)

(21) International Application Number:
PCT/US2013/020906

(22) International Filing Date:
9 January 2013 (09.01.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/585,951 12 January 2012 (12.01.2012) US

(71) Applicant: FUTRFAB, INC. [US/US]; P. O. Box 263,
Salisbury Mills, New York 12577 (US).

(72) Inventor: FLITSCH, Frederick A.; 25 Twin Ponds Road,
New Windsor, New York 12553 (US).

(74) Agent: KINCART, Joseph P.; 2750 Riverside Avenue,
Jacksonville, Florida 32205 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to the identity of the inventor (Rule 4.17(i))
- of inventorship (Rule 4.17(iv))

Published:

- without international search report and to be republished
upon receipt of that report (Rule 48.2(g))

(54) Title: RETROFITTING CLEANROOM FABRICATORS INTO CLEANSPACE FABRICATORS

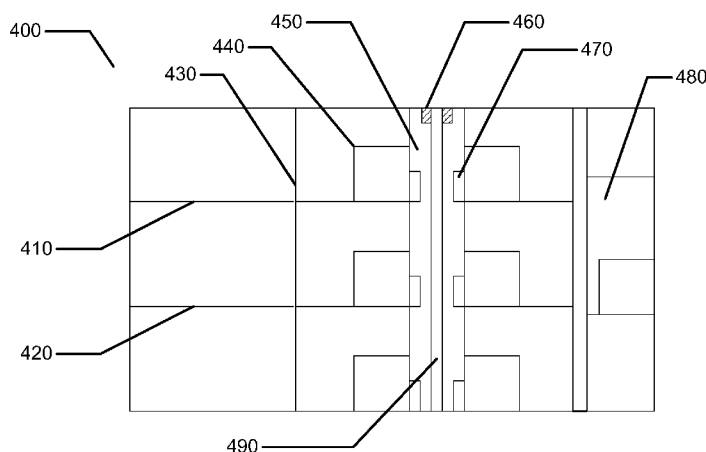


FIG. 4

(57) Abstract: The present invention provides various methods for forming cleanspace fabricators by retrofitting a structure of an existing cleanroom based fabricator. In some embodiments, a cleanspace fabricator is formed within a region of a cleanroom fabricator which is not transformed.