



(51) International Patent Classification:

B66C 13/02 (2006.01) **B66C 23/52** (2006.01)
B63B 27/10 (2006.01)

(21) International Application Number:

PCT/NO2011/000261

(22) International Filing Date:

20 September 2011 (20.09.2011)

(25) Filing Language:

Norwegian

(26) Publication Language:

English

(30) Priority Data:

20101312 21 September 2010 (21.09.2010) NO

(71) Applicant (for all designated States except US): **ROLLS-ROYCE MARINE AS** [NO/NO]; Deck Machinery-Brattvaag, P.O. Box 1522, N-6025 Ålesund (NO).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BJØRSHOL, Øyvind** [NO/NO]; Storesandøy, N-6530 Averøy (NO).

(74) Agent: **ACAPO AS**; P.O. Box 1880 Nordnes, N-5817 Bergen (NO).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: HEAVE COMPENSATED CRANE

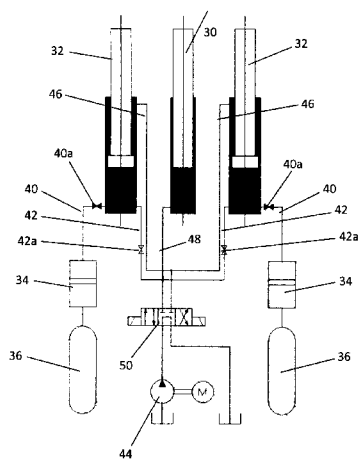


Fig. 2

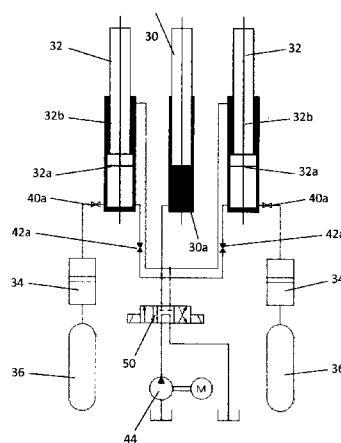


Fig. 3

(57) Abstract: A heave compensated crane is described, comprising a lower vertical beam (10) and an upper horizontal beam (12) which are mutually connected via an articulated piece (20), as the vertical beam is connected at the bottom to a base (14) which in turn comprises a slew ring for rotation of the crane about a vertical axis, and a strut (22) is arranged between the base (14) and the articulated piece (20) at a distance from the vertical beam (10) and largely in parallel with this in a normal position for the crane, and that the vertical beam (10) is driven by, at least, one cylinder (18) and the upper crane beam (12) in its movement in relation to the lower beam (10) is driven by an intermediate cylinder arrangement (16), where the cylinder arrangement (16) comprises, at least, one single working cylinder (30) and, at least, one double working cylinder (32).