

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 February 2004 (19.02.2004)

PCT

(10) International Publication Number
WO 2004/015691 A2

(51) International Patent Classification⁷: **G11B 5/86**,
5/82, 11/105

(72) Inventors: **GAUZNER, Gennady**; 1114 Big Basin Road,
Livermore, CA 94550 (US). **KUO, David**; 3308 Kipling
St., Palo Alto, CA 94306 (US).

(21) International Application Number:
PCT/US2003/025097

(74) Agents: **DEL CASTILLO, Jesus** et al.; Seagate Technol-
ogy LLC, Building 15, 920 Disc Drive, Scotts Valley, CA
95066 (US).

(22) International Filing Date: 8 August 2003 (08.08.2003)

(25) Filing Language: English

(81) Designated States (*national*): CN, DE, GB, JP, KR, SG.

(26) Publication Language: English

(30) Priority Data:
60/402,244 8 August 2002 (08.08.2002) US
10/417,220 17 April 2003 (17.04.2003) US


Published:

— without international search report and to be republished
upon receipt of that report

(71) Applicant: **SEAGATE TECHNOLOGY LLC** [US/US];
Intellectual Property Department, Building 15, 920 Disc
Drive, Scotts Valley, CA 95066 (US).

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: DEVICE & METHOD FOR CONTACT PATTERNING OF DUAL-SIDED MAGNETIC MEDIA

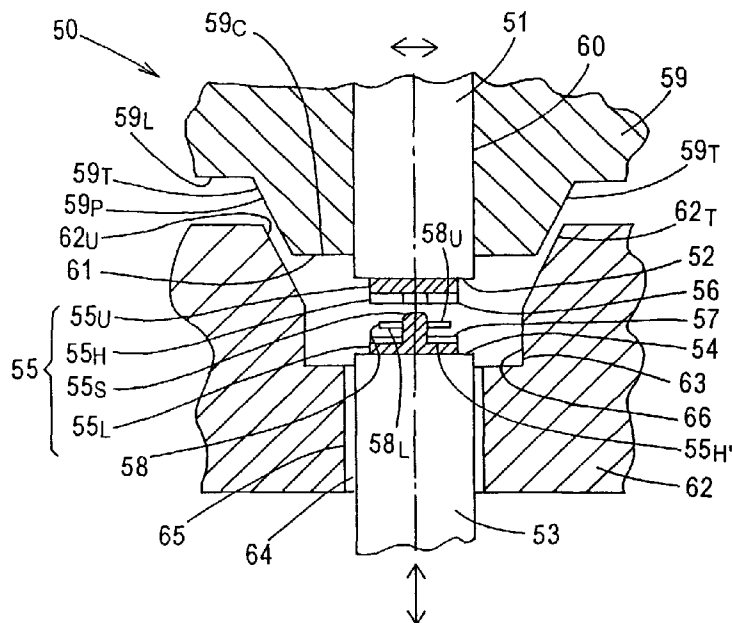

(57) Abstract: A device for use in performing simultaneous contact printing of magnetic patterns in opposing surfaces of a dual-sided magnetic or magneto-optical (MO) recording medium, comprising; (a) a fixedly mounted first magnetic pole having a first end surface; (b) an axially movable second magnetic pole in axial alignment with the first magnetic pole, the second magnetic pole having a second end surface opposite to and facing the first end surface of the first magnetic pole; (c) a first portion of a centering insert fixture mounted on the first end surface of the first magnetic pole; and (d) a second portion of a centering insert fixture mounted on the second end surface of the second magnetic pole.