



(51) International Patent Classification:
G06F 1/32 (2006.01)

(21) International Application Number:
PCT/US2012/060325

(22) International Filing Date:
16 October 2012 (16.10.2012)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: **RAZER (ASIA-PACIFIC) PTE.LTD.**
[SG/SG]; 514 Chai Chee Lane, #07-05, Singapore 469029 (SG).

(72) Inventor; and

(71) Applicant (for US only): **WILSON, John, Alexander**
[CA/US]; 110 Moreland Street, San Francisco, CA 94131 (US).

(74) Agent: **JOHNSON, Michael**; c/o Viering, Jentschura & Partner, 3770 Highland Ave, Suite 203, Manhattan Beach, CA 90266 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: COMPUTING SYSTEMS AND METHODS FOR CONTROLLING A COMPUTING SYSTEM

FIG 1

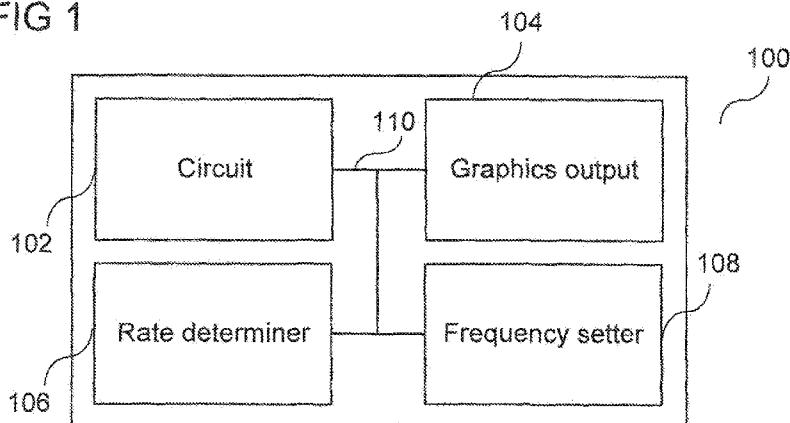

(57) Abstract: According to various embodiments, a computing system may be provided.. The computing system may include: a circuit configured to operate at a plurality of operation frequencies; a graphics output configured to output image data for display; a rate determiner configured to determine a frame rate of the graphics output; and a frequency setter configured to set an operation frequency of the circuit based on the determined frame rate.