



- (51) **International Patent Classification:**
A61F 2/16 (2006.01)
- (21) **International Application Number:**
PCT/US2009/033401
- (22) **International Filing Date:**
6 February 2009 (06.02.2009)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/026,805 7 February 2008 (07.02.2008) US
- (71) **Applicant** (*for all designated States except US*): **ALCON, INC.** [CH/CH]; Bosch 69, P.O. Box 62, CH-6331 Hünenberg (CH).
- (72) **Inventor; and**
- (75) **Inventor/Applicant** (*for US only*): **DOWNER, David, A.** [US/US]; 5217 Spanish River Trail, Fort Worth, Texas 76137 (US).
- (74) **Agents:** **PASTRANA, Armando, Jr.** et al.; Alcon Research, Ltd., 6201 South Freeway, TB4-8, Fort Worth, TX 76134 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ,
EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG,
SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

- (54) Title:** LENS DELIVERY SYSTEM CARTRIDGE

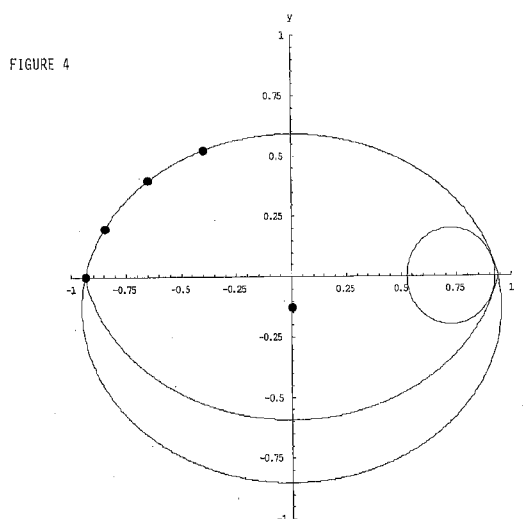

- (57) Abstract:** A cartridge for an IOL delivery system (10) that has an injector tip (12) geometry designed to reduce stresses at the incision wound edges generated during insertion of an IOL into an eye.