



(51) International Patent Classification:
F25J 3/02 (2006.01) *C09K 5/00* (2006.01)

(21) International Application Number:
PCT/US2008/009418

(22) International Filing Date:
6 August 2008 (06.08.2008)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **LUM-MUS TECHNOLOGY INC.** [US/US]; 1515 Broad Street, Bloomfield, NJ 07003-3096 (US).

(72) Inventor: **SUMNER, Charles**; 3 Startford Drive, Livingston, NJ 07039 (US).

(74) Agent: **BERGMAN, Jeffrey s.**; Osha Liang LLP, 909 Fannin Street, Suite 3500, Houston, Texas 77010 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: METHOD OF COOLING USING EXTENDED BINARY REFRIGERATION SYSTEM

FIG. 1

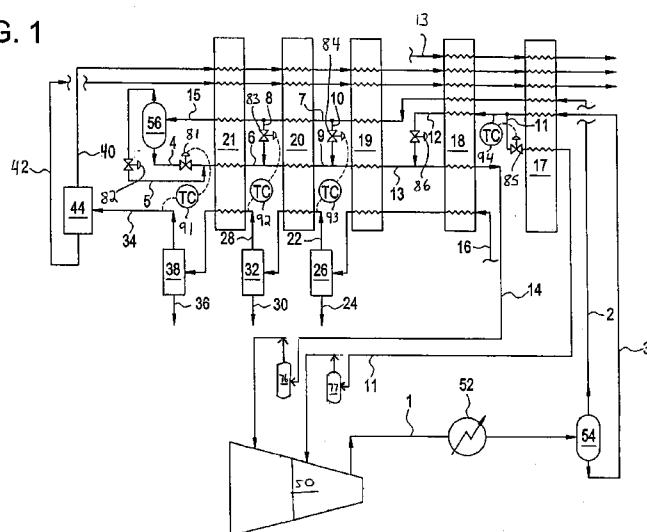

(57) Abstract: A method of cooling using an extended binary refrigerant system containing methane and a C3 hydrocarbon such as propylene and/or propane is disclosed. The extended binary refrigerant from a compressor final discharge is separated into a methane-rich vapor fraction and at least one C3 rich liquid fraction so as to provide various temperatures and levels of refrigeration in various heat exchange stages. The method and corresponding refrigeration system can be utilized in plants utilizing low pressure or high pressure demethanizers.