

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 December 2004 (29.12.2004)

PCT

(10) International Publication Number
WO 2004/113779 A3

(51) International Patent Classification⁷: **B29C 33/04**,
45/73

(21) International Application Number:
PCT/US2004/019391

(22) International Filing Date: 17 June 2004 (17.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/600,373 20 June 2003 (20.06.2003) US

(71) Applicant and

(72) Inventor: **RICHARDS, Leslie, W.** [US/US]; 2735 N.
Britton Road, Union Grove, WI 53182 (US).

(74) Agents: **JANSSON, Peter, N.** et al.; Jansson, Shupe &
Munger, Ltd., 245 Main Street, Racine, WI 53403 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,

GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).


Published:

- *with international search report*
- *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

(88) Date of publication of the international search report:
28 April 2005

[Continued on next page]

(54) Title: PLUG BAFFLE DEVICE FOR MOLD

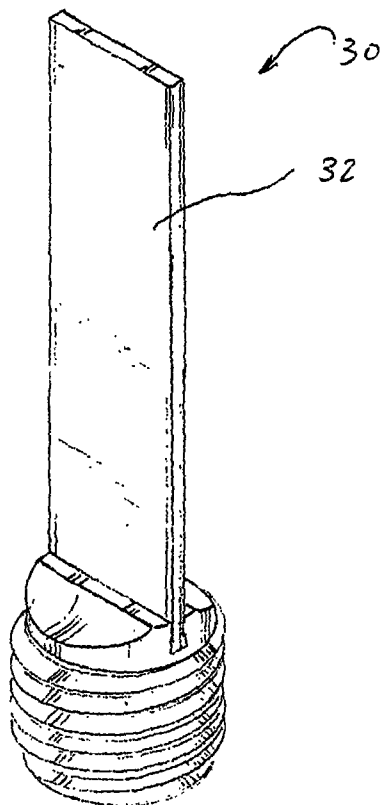

(57) Abstract: A plug baffle device (30 or 30a) for installation in a coolant passage (see coolant 82) within a mold (see mold parts 78 and 80), the plug baffle device having its coolant-encountering blade (32) mechanically attached to a base member (47), and methods for making such plug baffle device. Advantages include acceptance of greater torque and less susceptibility to damage from high torque. In certain highly preferred embodiments, the base member includes an extension portion facilitating mechanical engagement and providing other substantial advantages.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.