



(51) International Patent Classification:
H04L 29/06 (2006.01)

(21) International Application Number:
PCT/US2020/029979

(22) International Filing Date:
25 April 2020 (25.04.2020)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/838,937 25 April 2019 (25.04.2019) US
62/893,756 29 August 2019 (29.08.2019) US

(71) Applicant: **AEROVIRONMENT** [US/US]; 900 Innova-
tors Way, Simi Valley, California 93065 (US).

(72) Inventors: **LOTFY, Nader**; 520 S. Santa Anita Ave.,
Pasadena, California 91107 (US). **AAGAARD, Eric**; 2202
West 20th St., Los Angeles, California 90018 (US).

(74) Agent: **BALZAN, Christopher**; 674 County Square Drive,
Suite 105, Ventura, California 93003 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: SYSTEM AND METHOD FOR SOLAR CELL ARRAY COMMUNICATION

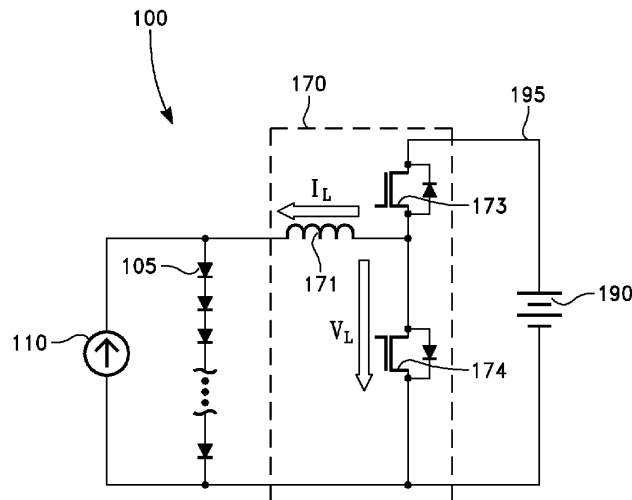


FIG. 1

(57) Abstract: In one implementation, a method for a solar cell array is provided, the method includes emitting a communication message from the solar cell array by reverse biasing the solar cell array so as to cause at least a portion of the solar array to emit a detectable amount of radiation corresponding to the communication message. In one embodiment a solar cell array circuit is provided including a solar string comprising a plurality of solar cells coupled together, a charge storage device coupled to a power bus, and a bidirectional boost-buck converter having a first and second pair of MOSFETs connected in series between positive and negative rails of the power bus with an inductor coupled from between the first and second paired MOSFETs to a charging output of the solar string.

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*