9705355-7

RTMP's copy

PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : B63B 21/50 — A1

(11) International Publication Number: **WO 96/33090**

(43) International Publication Date: 24 October 1996 (24.10.96)

(21) International Application Number: PCT/NO96/00088

(22) International Filing Date: 17 April 1996 (17.04.96)

(30) Priority Data:
951479 19 April 1995 (19.04.95) NO

(71) Applicant *(for all designated States except US)*: NORSK HYDRO A.S [NO/NO]; N-0240 Oslo (NO).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: ASKESTAD, Sigmund [NO/NO]; Skatvedtvn. 85, N-3475 Sætre (NO). NIELSEN, Finn, Gunnar [NO/NO]; Tjørnhaugen 84, N-5062 Bønes (NO).

(74) Agent: HOFSETH, Svein; Norsk Hydro a.s, N-0240 Oslo (NO).

(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published
With international search report.

(54) Title: METHOD AND MEANS TO DIRECT AN ANCHORED FLOATING STRUCTURE AGAINST THE DIRECTION OF THE WAVES IN OPEN SEA

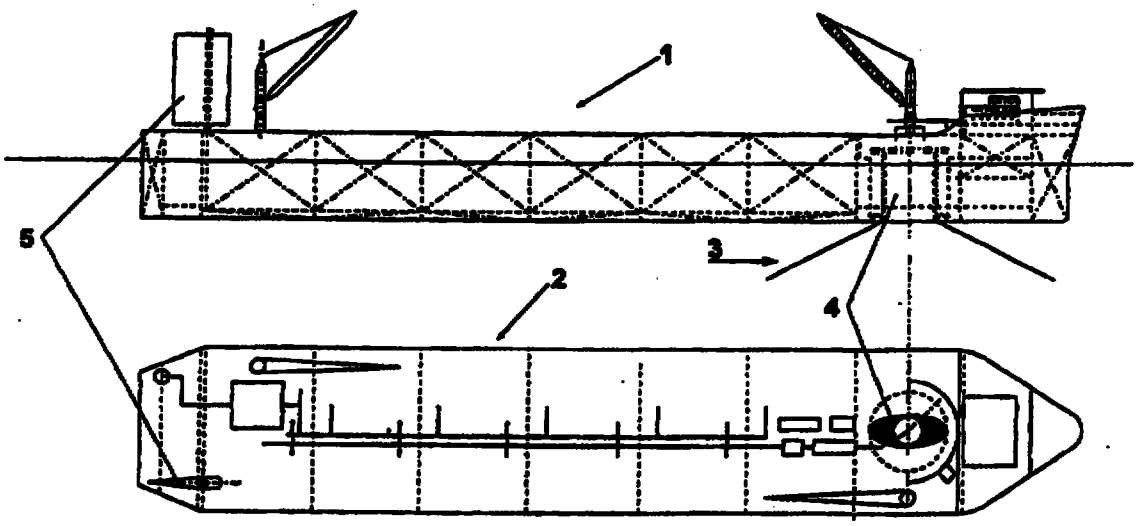

(57) Abstract

Method and means to direct an anchored floating structure (1) against the direction of the waves, where said structure at its fore end is moored to a buoy or the like. The floating structure is provided with one or more turnable wind rudder(s) (5) at its aft end, where said rudder(s) may be adjusted versus the direction of the wind in a manner that secures to direct the floating structure against the direction of the waves in a stable manner. The wind rudder or rudders (5) sections may advantageously have a wind profile- or a droplet-like shape.