



(51) International Patent Classification:

F41H 13/00 (2006.01) H05C 1/04 (2006.01)
F41B 15/04 (2006.01)

(21) International Application Number:

PCT/US2023/028126

(22) International Filing Date:

19 July 2023 (19.07.2023)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

63/393,062 28 July 2022 (28.07.2022) US

(71) Applicant: AXON ENTERPRISE, INC. [US/US]; 17800 N 85th Street, Scottsdale, Arizona 85255 (US).

(72) Inventors: MORRISON, Regan T.; 17800 N 85th Street, Scottsdale, Arizona 85255 (US). DRISCOLL, Samuel R.; 17800 N 85th Street, Scottsdale, Arizona 85255 (US). GROFF, John; 17800 N 85th Street, Scottsdale, Arizona 85255 (US).

(74) Agent: POWLEY, Justin; 17800 N 85th Street, Scottsdale, Arizona 85255 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: TRAINING ATTACHMENT FOR AN ELECTRODE OF A CONDUCTED ELECTRICAL WEAPON

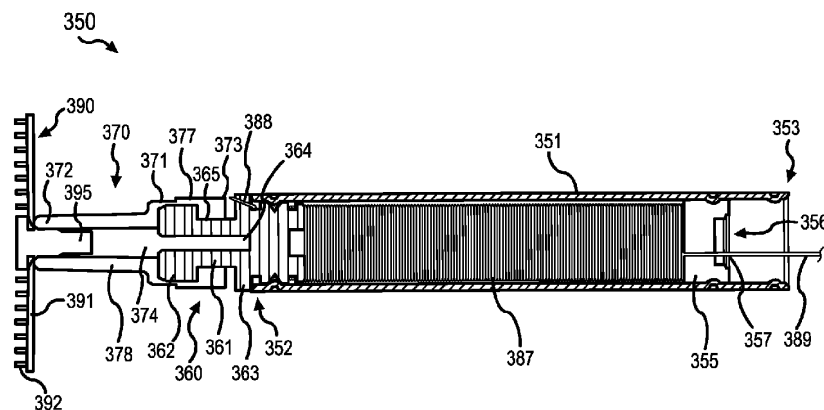


FIG. 4B

(57) Abstract: An electrode for a conducted electrical weapon may comprise an electrode body and an electrode head coupled to a first end of the electrode body. A training attachment may be coupled to the electrode head. The training attachment may comprise an attachment elongated extension opposite an attachment base. The training attachment may comprise a plurality of wings coupled to a forward surface of the attachment elongated extension. The plurality of wings may be configured to operate from a first position to a second position responsive to an impact of the training attachment with a target. The plurality of wings may comprise mating surfaces configured to couple to the target.