



THIS SHEET HAS BEEN REPLACED

INCREASING THE FRICTION DURABILITY OF POWER
TRANSMISSION FLUIDS THROUGH THE USE OF OIL
SOLUBLE COMPETING ADDITIVES

5 Background of the Invention

Field of the Invention

The present invention relates to a method of
10 and compositions for improving the friction
durability of power transmission fluids.

Description of Related Prior Art

Power transmission fluids, such as automatic
15 transmission fluids, are formulated to very exacting
friction requirements set by original equipment
manufacturers. These requirements have two primary
aspects, namely: (1) the absolute level of the
friction coefficients, i.e., static friction, μ_s , and
20 dynamic friction, μ_d , that can be achieved by these
fluids, and (2) the length of time that these fluids
can be used without undergoing an appreciable change
in the friction coefficients. This latter
performance feature is also known as friction
25 durability.

Since friction durability is a function of the
type and concentration of friction modifier
molecules present in a given fluid, such as a power
transmission fluid, conventionally there are only
30 limited ways of improving friction durability. One
of these ways is to add more friction modifier,
i.e., to increase the concentration of friction
modifier in the fluid. Since friction modifiers are
consumed at a somewhat fixed rate, this will prolong
35 the effective life of the fluid. However, this
approach often is not very practical because
increasing the concentration of the friction
modifier usually will result in a lowering of the
absolute values of the friction coefficients to a

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

2

point where they are below the minimum values specified by the original equipment manufacturer. Then, as the friction modifier is consumed with time, the friction coefficients will slowly rise to unacceptable levels. The other conventional approach for improving friction durability is to find more stable friction modifiers. This is not always easy since most friction modifiers are simple organic chemicals and are subject to oxidation and chemical reactions during service.

Various compositions and methods have been suggested for modifying the properties of oleaginous fluids. For example, U.S. Patent 4,253,977 relates to an ATF composition which comprises a friction modifier such as n-octadecyl succinic acid or the reaction product of an alkyl or alkenyl succinic anhydride with an aldehyde/tris hydroxymethyl aminomethane adduct and an overbased alkali or alkaline earth metal detergent. The ATF may also contain a conventional hydrocarbyl-substituted succinimide ashless dispersant such as polyisobutenyl succinimide. Other patents which disclose ATF compositions that include conventional alkenyl succinimide dispersants include, for example, U.S. Patents 3,879,306; 3,920,562; 3,933,659; 4,010,106; 4,136,043; 4,153,567; 4,159,956; 4,596,663 and 4,857,217; British Patents 1,087,039; 1,474,048 and 2,094,339; European Patent Application 0,208,541(A2); and PCT Application WO 87/07637.

U.S. Patent 3,972,243 discloses traction drive fluids which comprise gem-structured polyisobutylene oligomers. Polar derivatives of such gem-structured polyisobutylenes can be obtained by conversion of the polyisobutylene oligomers to polar compounds containing such functional groups as amine, imine, thioketone, amide, ether, oxime, maleic anhydride,

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

3

etc. adducts. The polyisobutylene oligomers generally contain from about 16 to about 48 carbon atoms. Example 18 of this patent discloses reacting a polyisobutylene oil with maleic anhydride to form
5 a polyisobutylene succinic anhydride which is useful as a detergent, as an anti-wear agent, and as an intermediate in the production of a hydrazide derivative. Other patents containing similar disclosures include, for example, U.S. Patent
10 3,972,941; U.S. Patent 3,793,203; U.S. Patent 3,778,487 and U.S. Patent 3,775,503.

While the prior art suggests a variety of additives for modifying the properties of various oleaginous compositions, there is no suggestion of
15 any additives, nor of any combination of additives, which can simultaneously control the friction coefficients and friction durability of such compositions. Accordingly, there is a continuing need for new additives, as well as new methods,
20 which would enable the formulation of oleaginous compositions, including lubricating oils and power transmission fluids, having specifically controlled friction coefficients and improved friction durability.

25

Summary of the Invention

In one embodiment, the invention relates to a method of controlling the friction coefficients and improving the friction durability of an oleaginous
30 composition, which comprises:

adding to a major portion of an oil of lubricating viscosity a friction controlling and friction durability improving effective amount of an oil soluble combination of chemical additives
35 comprising (a) a first chemical additive comprising a first polar head group other than a dialkyloxylated amino group and a friction reducing

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

substituent group, and (b) at least one other chemical additive having a dialkoxylated amino polar head group and a non-friction reducing substituent group.

5

Description of the Drawings

Figure 1 is a bar graph illustrating the static coefficient of friction, determined at 93°C, using a Low Velocity Friction Apparatus (LVFA), for (1) a
10 base fluid, (2) the base fluid plus a friction reducer and (3) the base fluid plus a combination of a friction reducer and diethoxylated-n-butylamine. (DEBA) as a non-friction reducing additive;


Figure 2 is a bar graph illustrating the static
15 coefficient of friction, determined at 149°C, using a LVFA, for (1) a base fluid, (2) the base fluid plus a friction reducer, (3) the base fluid plus a friction reducer and 0.05 wt.% DEBA, (4) the base fluid plus a friction reducer and 0.1 wt.% DEBA, and
20 (5) the base fluid plus a friction reducer and 0.2 wt.% DEBA; and

Figure 3 is a graph illustrating the static coefficient of friction versus the number of test cycles as tested in the MERCON® 4,000 cycle friction
25 test, as described in the FORD MOTOR COMPANY MERCON specification, of (1) a base fluid, (2) the base fluid plus 0.05 wt.% DEBA, and (3) the base fluid plus 0.1 wt.% DEBA.

Detailed Description of the Invention

A primary advantage of the present invention is that it enables the fluid formulator to increase the concentration of the active friction reducer without reducing the absolute values of the friction
35 coefficients to a point below the minimum specified by the original equipment manufacturer. This is accomplished by placing in the oleaginous

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

5

composition, such as an automatic transmission fluid, a friction reducing chemical additive (Component A) and a non-friction reducing chemical additive containing a dialkoxylated amino polar head group (Component B). For example, a long chain carboxylic acid, such as oleic acid or isostearic acid, or a branched chain hydrocarbyl substituted amide, such as the reaction product of isostearic acid and tetraethylene pentamine (TEPA), can be added as a friction reducing additive along with an ethoxylated butylamine amine non-friction reducing additive.

While not wishing to be bound by a particular theory, it is believed that once in the fluid, the two chemical additives compete for the surfaces which are contacted. Accordingly, not all of the friction reducing additive will contact the surfaces even if there is an excess of friction reducer in the fluid. This enables the formulator to intentionally add more friction reducing additive to the fluid than could normally be tolerated without lowering the friction coefficients to a level below the minimum specified by the original equipment manufacturer. Then, as the additives which are in contact with the surfaces are slowly consumed, an additional portion of the excess friction reducer and competing dialkoxylated amine originally present in the fluid can come in contact with the surfaces, thereby maintaining the friction coefficients at the desired levels. Thus, by adding the friction reducing chemical additive and the dialkoxylated amino group containing non-friction reducing chemical additive in an appropriate ratio, the friction coefficients of the resulting fluid will remain essentially constant over a long period of use, i.e., the fluid will exhibit a substantially improved friction durability relative to fluids

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

6

containing only a friction reducing chemical additive or only a non-friction reducing additive.

Component A

5 The oil soluble friction reducing additives
(Component A) contemplated for use in this invention
comprise any of those chemical additives
conventionally employed for reducing the friction
coefficients of oleaginous fluids to which they are
10 added. Typically, such friction reducing additives
comprise a polar head group and a friction reducing
substituent group which is linked to the polar head
group.


 The friction reducing substituent group
15 normally would comprise a substantially linear
hydrocarbyl group having at least about 10 carbon
atoms, typically from about 10 to about 30 carbon
atoms, and preferably from about 14 to about 18
carbon atoms. Examples of such linear hydrocarbyl
20 groups include, but are not limited to oleyl,
isostearyl and octadecenyl groups.

 The polar head groups which are contemplated
for use in the present invention vary widely and
include any polar group, other than a dialkoxylated
25 amino group, which is conventionally present in a
friction reducing additives. Typically, however,
the polar head groups present in the friction
reducing additives contemplated for use in this
invention include, for example, polar head groups
30 having the following moieties:

This Sheet Has Been Replaced


THIS SHEET HAS BEEN
REPLACED

7

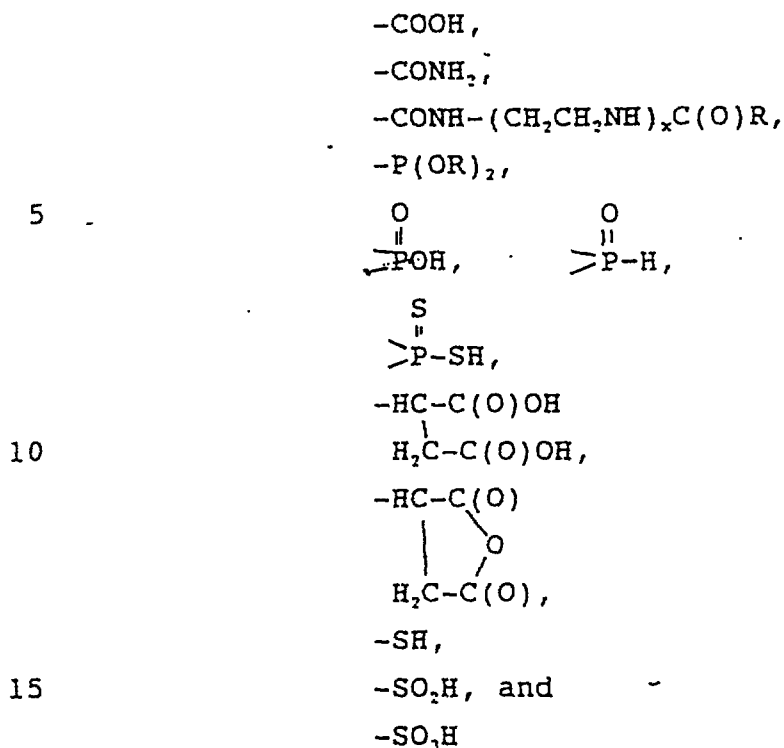

wherein R represents a C₁ to C₃₀ linear or branched hydrocarbyl group and x represents an integer of from 1 to about 8.

In one aspect, the friction reducing additive may be represented by formula I:



wherein A represents a substantially linear, long chain hydrocarbyl group; L represents a linking group; and P represents a polar head group, preferably a nitrogen-containing polar head group.

The linear hydrocarbyl group A typically contains from about 12 to about 50 carbon atoms and typically has a molecular weight on the order of from about 150 to about 700.


Suitable hydrocarbyl groups include alkyl and alkenyl groups, such as oleyl, octadecyl, octadecenyl, isostearyl, and hetero atom-containing analogs thereof.

THIS SHEET HAS BEEN
REPLACED

atoms. A variety of hetero atoms can be used and are readily apparent to those skilled in the art. Suitable hetero atoms include, but are not limited to, nitrogen, oxygen, phosphorus, and sulfur.

- 5 Preferred hetero atoms are sulfur and oxygen. Suitable linear hydrocarbyl groups include, for example, hexadecyloxypropyl, octadecylthiaprotyl, hexadecyloxyethyl and tetradecyloxgethyl.

- The linking group typically is derived from a
10 monounsaturated carboxylic reactant comprising at least one member selected from the group consisting of (i) monounsaturated C_4 to C_{10} dicarboxylic acid wherein (a) the carboxyl groups are vicinyl, (i.e. located on adjacent carbon atoms) and (b) at least
15 one, preferably both, of said adjacent carbon atoms is part of said monounsaturation; (ii) derivatives of (i) such as anhydrides or C_1 to C_3 alcohol derived mono- or diesters of (i); (iii) monounsaturated C_3 to C_{10} monocarboxylic acid wherein the carbon-carbon
20 double bond is allylic to the carboxy group, i.e., of the structure



- 25 and (iv) derivatives of (iii) such as C_1 to C_3 alcohol derived mono- or diesters of (iii). Upon reaction with the linear hydrocarbyl group reactant, the monounsaturation of the carboxylic reactant becomes saturated. Thus, for example, maleic
30 anhydride becomes a linear hydrocarbyl group substituted succinic anhydride, and acrylic acid becomes a linear hydrocarbyl substituted propionic acid.


- Exemplary of such monounsaturated carboxylic
35 reactants are fumaric acid, itaconic acid, itaconic anhydride, maleic acid, maleic anhydride, chloromaleic acid, chloromaleic anhydride, acrylic

THIS SHEET HAS BEEN
REPLACED

9


acid, methacrylic acid, crotonic acid, hemiac
anhydride, cinnamic acid, and lower alkyl (e.g., C₁
to C₄ alkyl) acid esters of the foregoing, e.g.,
methyl maleate, ethyl fumarate, methyl fumarate,
5 etc.

Maleic anhydride or a derivative thereof is
preferred as it does not homopolymerize
appreciably, but attaches onto the linear
hydrocarbyl group to give two carboxylic acid
10 functionalities. Such preferred materials have
the generic formula II:

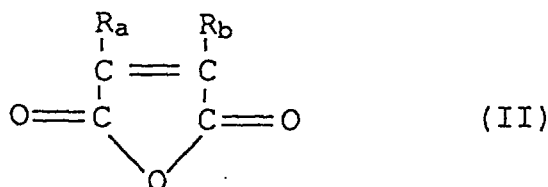

wherein R_a and R_b are hydrogen or a halogen.

In addition to the unsaturated carboxylic
15 acid materials described above, the linking group
may comprise the residue of a functionalized
aromatic compound, such as a phenol or a benzene
sulfonic acid. Thus, in one preferred aspect of
the invention, the linking group may be
20 illustrated by formula III:

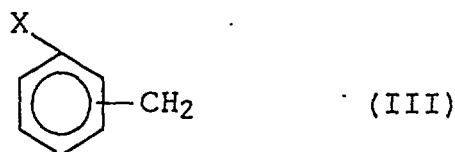

wherein X is a functional group such as OH, Cl or
SO₃H.

In such cases, the friction reducers may be
25 prepared, for example, by a conventional Mannich
Base condensation of aldehyde, (e.g.,
formaldehyde), polar group precursor (e.g.
alkylene polyamine) and hydrocarbyl group
substituted phenol. The following U.S. patents
30 contain extensive disclosures relative to the
production of Mannich condensates and to that
extent, these patents are incorporated herein by

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

10

reference: 2,459,112; 2,962,442; 3,355,270;
3,448,047; 3,600,372, 3,649,729 and 4,100,082.

Sulfur-containing Mannich condensates also may
be used and such condensates are described, for
5 example, in U.S. Patents 3,368,972; 3,649,229;
3,600,372; 3,649,659 and 3,741,896. These patents
are incorporated herein by reference to the extent
that they disclose sulfur-containing Mannich
condensates. Generally, the condensates useful in
10 this invention are those made from a phenol having a
linear hydrocarbyl substituent of at least about 10,
typically about 10 to about 50 carbon atoms, more
typically, 12 to about 36 carbon atoms. Typically
these condensates are made from formaldehyde or a C₂
15 to C₇ aliphatic aldehyde and an amino compound.

These Mannich condensates are prepared by
reacting about one molar portion of linear
hydrocarbyl substituted phenolic compound with about
1 to about 2.5 molar portions of aldehyde and about
20 1 to about 5 equivalent portions of amino compound
(an equivalent of amino compound is its molecular
weight divided by the number of >NH groups present).
The conditions under which the condensation
reactions are carried out are well known to those
25 skilled in the art as evidenced by the above-noted
patents. Accordingly, the above-noted patents are
incorporated by reference for their disclosures
relating to reaction conditions.

As indicated above, the polar head group may
30 vary widely and typically comprises the residue of
an amine compound, i.e. polar group precursor,
containing at least 1, typically 2 to 60, and
preferably 2 to 40 total carbon atoms, and at least
1, typically 2 to 15, and preferably 2 to 9 nitrogen
35 atoms, with at least one nitrogen atom preferably
being present in a primary or secondary amine group.
The amine compounds may be hydrocarbyl amines or may



THIS SHEET HAS BEEN
REPLACED


11

be hydrocarbyl amines including other groups, e.g., hydroxy groups, alkoxy groups, amide groups, nitrile groups, imidazole groups, morpholine groups or the like. The amine compounds also may contain 1 or
5 more boron or sulfur atoms, provided that such atoms do not interfere with the substantially polar nature and function of the selected polyamine. It is to be understood, however, that the polar groups contemplated for use in this invention may not
10 comprise dialkoxylated amino groups.


Useful amines include those of formulas IV and V:



15



wherein R⁴, R⁵, R⁶ and R⁷ are independently selected
20 from the group consisting of hydrogen, C₁ to C₂₅ linear or branched alkyl radicals, C₁ to C₁₂ alkoxy C₂ to C₆ alkylene radicals, C₂ to C₁₂ hydroxy amino alkylene radicals, and C₁ to C₁₂ alkylamino C₂ to C₆ alkylene radicals; and wherein R⁷ can additionally
25 comprise a moiety of the formula:



30 wherein R⁵ is defined above; wherein s and s' can be the same or a different number of from 2 to 6, preferably 2 to 4; and t and t' can be the same or a different number of from 0 to 10, preferably 0 to 7 with the proviso that the sum of t and t' is not
35 greater than 15; and with the further proviso that not more than one of R⁴, R⁵ and R⁶ may comprise a C₁ to C₁₂ alkoxy C₂ to C₆ alkylene radical.




THIS SHEET HAS BEEN
REPLACED

12


Non-limiting examples of suitable amine compounds include: 1,2-diaminoethane, 1,6-diaminohexane; polyethylene amines such as tetraethylene pentamine; polypropylene amines such as 1,2-propylene diamine; di-(1,2-propylene) diamine; di-(1,2-propylene) triamine; di-(1,3-propylene) triamine; N,N-dimethyl-1,3-diaminopropane; N,N-di(2-aminoethyl) ethylene diamine; N,N-di(2-hydroxyethyl) 1,3-propylene diamine; 3-dodecyloxy-propylamine, N-dodecyl-1,3-propane diamine, etc.

Other suitable amines include: amino morpholines such as N-(3-aminopropyl) morpholine and N-(2-aminoethyl) morpholine; substituted pyridines such as 2-amino pyridine, 2-methylamino pyridine and 2-methylamino pyridine; and others such as 2-aminothiazole; 2-amino pyrimidine; 2-amino benzothiazole; methyl-1-phenyl hydrazine and para-morpholino aniline, etc. A preferred group of aminomorpholines are those of formula VI:



where r is a number having a value of 1 to 5.


Useful amines also include alicyclic diamines; imidazolines and N-aminoalkyl piperazines of formula VII:

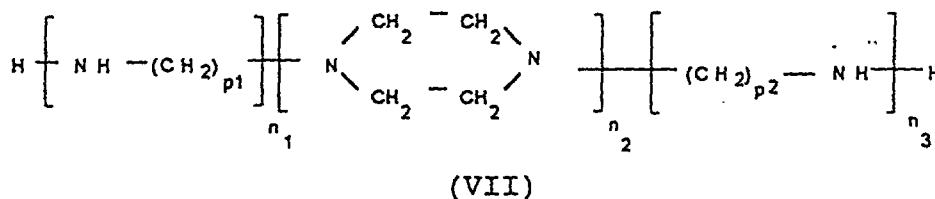


wherein p_1 and p_2 are the same or different and each is an integer of from 1 to 4; and n_1 , n_2 and n_3 are the same or different and each is an integer of from 1 to 3.

THIS SHEET HAS BEEN
REPLACED

Commercial mixtures of amine compounds may advantageously be used. For example, one process for preparing alkylene amines involves the reaction of an alkylene dihalide (such as ethylene dichloride or propylene dichloride) with ammonia, which results in a complex mixture of alkylene amines wherein pairs of nitrogens are joined by alkylene groups, forming such compounds as diethylene triamine, triethylenetetramine, tetraethylene pentamine and corresponding piperazines. Low cost poly(ethyleneamine) compounds averaging about 5 to 7 nitrogen atoms per molecule are available commercially under trade names such as "Polyamine H", "Polyamine 400", "Dow Polyamine E-100", etc. Useful amines also include polyoxyalkylene polyamines such as those having formula VIII:




wherein m has a value of at least 3 and "alkylene" represents a linear or branched chain C_2 to C_7 , preferably C_2 to C_4 alkylene radical; or formula IX:



wherein R^8 is a polyvalent saturated hydrocarbon radical having up to 10 carbon atoms and the number of substituents on the R^8 group is represented by the value of " a ", which is a number of from 3 to 6, wherein m has a value of at least 1; and wherein "alkylene" represents a linear or branched chain C_2 to C_7 , preferably C_2 to C_4 alkylene radical.

The polyoxyalkylene polyamines of formulas (VIII) or (IX) above, preferably polyoxyalkylene diamines and polyoxyalkylene triamines, may have average molecular weights ranging from about 200 to about 4000 and preferably from about 400 to about


This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

14

2000. The preferred polyoxyalkylene polyamines include the polyoxyethylene and polyoxypropylene polyamines. The polyoxyalkylene polyamines are commercially available and may be obtained, for example, from the Jefferson Chemical Company, Inc. under the trade name "Jeffamines D-230, D-400, D-1000, D-2000, T-403", etc.

The polar group may be joined to the linking group through an ester linkage when the linking group is a carboxylic acid or anhydride. To incorporate polar groups of this type, they must have a free hydroxyl group and all of the nitrogen atoms in the polar group must be tertiary nitrogen atoms. Polar groups of this type are represented by formula X:




wherein n has a value of from 1 to 10, R and R' are H or C₁ to C₁₂ alkyl, and R'' and R''' are C₁ to C₆ alkyl.

25 Forming the Friction Reducing Additives

In accordance with one aspect of the invention, the friction reducing additives may be prepared by reacting a long chain linear carboxylic acid, such as oleic acid or isostearic acid, with a polar group precursor, preferably a nitrogen-containing polar group precursor, such as tetraethylene pentamine or diethylene triamine, to form the corresponding long linear hydrocarbyl amide.

Typically, from about 5 to about 0.5, preferably from about 3 to about 1, and most preferably from about 1.5 to about 1 moles of said carboxylic acid reactant are charged to the reactor

THIS SHEET HAS BEEN
REPLACED

15


per mole of primary nitrogen contained in the polar group precursor. The long chain linear carboxylic acid reactant may be readily reacted with a polar group precursor, i.e., amine compound, by heating at
5 a temperature of from about 100°C. to 250°C., preferably from 120° to 230°C., for a period of from about 0.5 to 10 hours, usually about 1 to about 6 hours.

Alternatively, as discussed above, the polar
10 group precursor may be reacted with an aldehyde and a hydrocarbyl substituted phenol in a conventional manner to form Mannich condensates having friction reducing properties.

15 Component B

The oil soluble non-friction reducing additives (Component B) contemplated for use in this invention comprise dialkoxylated amino compounds represented by formula (XI):

20



25 where R⁹ is a C₁ to C₈ linear alkyl group, C₂ to C₂₀ branched alkyl group or -CH₂CH₂OH; and R¹⁰ is H or a C₁ to C₈ linear or branched alkyl group.

Typically R⁹ is a C₂ to C₈ linear alkyl group, preferably a C₄ alkyl group. In a particularly
30 preferred aspect of the invention, R⁹ is n-butyl and R¹⁰ is H.

Typically, for non-friction reducing additives, the long chain, linear hydrocarbyl substituent group which is present in the friction reducing additives
35 would be replaced with a shorter chain linear or branched hydrocarbyl substituent group, e.g., one having a chain length of less than about 10 carbon

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

16

atoms. Thus, hydrocarbyl groups such as butyl, hexyl or octyl would be typical of those hydrocarbyl groups that would be present in the non-friction reducing additives contemplated for use in this invention.

Representative examples of chemical additives which would be useful as the non-friction reducing additive include, but are not limited to diethoxylated butylamine and diethoxylated hexylamine.

Compositions

A minor amount, e.g., 0.01 up to about 50 wt. %, preferably 0.1 to 10 wt. %, and more preferably 0.5 to 5 wt. %, of a combination of at least one friction reducing chemical additive (Component A) and at least one non-friction reducing chemical additive (Component B) and can be incorporated into a major amount of an oleaginous material, such as a lubricating oil, depending upon whether one is forming finished products or additive concentrates. The relative amounts of friction reducing additive and non-friction reducing additive can vary over wide limits depending in part upon the identity of the specific additives. However, the mole ratio of the friction reducing additive to non-friction reducing additive typically will be from about 1:99 to 99:1, and preferably from about 1:10 to 10:1.

When used in lubricating oil compositions, e.g., automatic transmission formulations, etc. the final combined concentration of the friction reducing additive and the non-friction reducing additive typically will be in the range of from about 0.01 to 30 wt. %, e.g., 0.1 to 15 wt. %, preferably 0.5 to 10.0 wt. %, of the total composition. The lubricating oils to which the combination of additives of this invention can be

THIS SHEET HAS BEEN
REPLACED

17

added include not only hydrocarbon oils derived from petroleum, but also include synthetic lubricating oils such as esters of dicarboxylic acids; complex esters made by esterification of monocarboxylic acids, polyglycols, dicarboxylic acids and alcohols; polyolefin oils, etc.

The combination of the friction reducing additive and the non-friction reducing additive may be utilized in a concentrate form, e.g., in a minor amount from about 0.1 wt. % up to about 50 wt. %, preferably 5 to 25 wt. %, in a major amount of oil, e.g., said synthetic lubricating oil with or without additional mineral lubricating oil.

The above oil compositions may contain other conventional additives, such as ashless dispersants, for example the reaction product of polyisobutylene succinic anhydride with polyethyleneamines of 2 to 10 nitrogens, which reaction product may be borated; antiwear agents such as zinc dialkyl dithiophosphates; viscosity index improvers such as polyisobutylene, polymethacrylates, copolymers of vinyl acetate and alkyl fumarates, copolymers of methacrylates with amino methacrylates; corrosion inhibitors; oxidation inhibitors; friction modifiers; metal detergents such as overbased calcium magnesium sulfonates, phenate sulfides, etc.

The following examples, wherein all parts or percentages are by weight unless otherwise noted, which include preferred embodiments, further illustrate the present invention.

Preparative Examples

EXAMPLE 1

Standard automatic transmission fluids (ATF's) were prepared for testing the friction characteristics of various combinations of friction additives. The fluids were prepared by blending the

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

18

friction additives indicated in TABLE 1 into an additive concentrate, and then dissolving the concentrate into a mineral oil base fluid (Exxon FN 1391) to give the required concentration of additives. The basic test fluids contained approximately 10 weight % of additives, including dispersant, anti-wear agent, corrosion inhibitor, antioxidant, anti-foamant, viscosity modifier and the indicated amount of the specified friction reducing and/or non-friction reducing additive.

TABLE 1

Test Fluid	Friction Reducing Additive. Wt. %	Non-Friction Reducing Additive. Wt. %
A-1	thiobisethanol ester ¹ , 0.4 %	NONE
A-2	thiobisethanol ester, 0.4 %	DEBA ² , 0.05 %
B-1	ISA/TEPA ³ , 0.2 %	NONE
B-2	ISA/TEPA, 0.2 %	DEBA, 0.05 %
C-1	Basic calcium sulfonate ⁴ , 0.2 %	NONE
C-2	Basic calcium sulfonate ⁴ , 0.2 %	DEBA, 0.05 %
D-1	Basic calcium phenate ⁵ , 0.2 %	NONE
D-2	Basic calcium phenate ⁵ , 0.2 %	DEBA, 0.05 %

¹ octadecenylsuccinic acid ester of thiobisethanol² diethoxylated n-butylamine³ isostearic acid/tetraethylene pentamine reaction product (3.1:1 mole ratio)⁴ Hitec E-611, Ethyl Corporation⁵ Paranox 52, Exxon Chemicals

THIS SHEET HAS BEEN
REPLACED

The static coefficient of each test fluid was determined at 93° C, using the Low Velocity Friction Apparatus (LVFA). The results of this testing are shown in Figure 1. For each test fluid, the first 5 bar (on left) shows the static friction coefficient of the base test fluid without any friction reducing or non-friction reducing additives (0.178). The center bar shows the static friction depression caused by the indicated friction reducing additive. 10 The third bar shows the increase in static friction due to the addition of 0.05 mass percent of DEBA. In all cases significant increase of static friction resulted from the addition of even this small amount of DEBA. The phenomenon was observed with all types 15 of friction reducing additives, i.e., acidic, basic, or metal containing friction reducing additives. Also the more potent the friction reducing additive, i.e., the greater the friction reduction caused by the friction reducing additive, the more pronounced 20 was the effect caused by the DEBA.


EXAMPLE 2

Using the base test fluid from Example 1, i.e., the mineral oil base fluid and the various additives 25 (but without any friction reducing additives or non-friction reducing additives) two additional test fluids were prepared. The additional test fluids contained the friction additives set forth in TABLE 2.

TABLE 2

<u>Test Fluid</u>	<u>Friction Reducing Additive, Wt. %</u>	<u>Non-Friction Reducing Additive, Wt. %</u>
B-3	thiobisethanol ester, 0.4 %	DEBA, 0.1 %
B-4	Same	DEBA, 0.2 %
Base Fluid	None	None

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

20

The static coefficient of blends B-1 through B-4, as well as that of the base test fluid blend (with no friction additives), was determined at 149° C using the LVFA. The results of this testing are shown in Figure 2. Figure 2 shows that with increasing amounts of DEBA the static coefficient of friction continues to increase. Therefore, it should be possible to accurately select whatever static coefficient of friction is desired between 0.062 and 0.150 by using the appropriate amount of DEBA.

EXAMPLE 3

Two more blends were prepared using the base test fluid blend described in Example 1, in combination with the amount of DEBA indicated in TABLE 3.

TABLE 3

Test Fluid	Friction Reducing Additives, Wt. %	Non-Friction Reducing Additive, Wt. %
E-1	None	DEBA, 0.05 %
E-2	None	DEBA, 0.1 %
Base Fluid	None	None

These two fluids, along with the base blend, were tested in the MERCON® 4000 cycle friction test, as described in the Ford MERCON Specification dated May 1987, Section 3.8. The static coefficient of friction as determined in this test is plotted versus test cycles in Figure 3. Figure 3 shows that DEBA, in and of itself, is not a friction increaser. Rather, DEBA functions to increase the static friction of a fluid containing both DEBA and a friction reducing additive by competing for the friction surface with the friction reducing additive.



THIS SHEET HAS BEEN
REPLACED

CLAIMS:

1. A method of controlling the friction coefficients and improving the friction durability of an oleaginous composition, which compromises:
 - 5 adding to a major portion of an oil of lubricating viscosity a friction controlling and friction durability improving effective amount of an oil soluble combination of chemical additives comprising (a) a first chemical additive comprising
 - 10 a polar head group other than a dialkoxylated amino group and a friction reducing substituent group, and (b) a second chemical additive having a dialkoxylated amino polar head group and non-friction reducing substituent group.
 - 15
2. An oleaginous composition comprising a major amount of an oil of lubricating viscosity and an amount effective for controlling the friction coefficients and for improving the friction
 - 20 durability of said composition of an additive composition comprising (a) a first chemical additive comprising a polar head group other than a dialkoxylated amino group and a friction reducing substituent group, and (b) a second chemical
 - 25 additive having a dialkoxylated amino polar head group and a non-friction reducing substituent group.
3. The composition of claim 2, wherein said first chemical additive (a) comprises a member
 - 30 selected from the group consisting of acidic friction reducing additives, basic friction reducing additives, metal containing friction reducing additives and mixtures thereof.
4. The composition of claim 3, wherein said
 - 35 first chemical additive (a) is selected from the group consisting of octadecenylsuccinic acid ester

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

22

of thiobisethanol, isostearic acid/TEPA, basic calcium sulfonate, basic calcium phenate and mixtures thereof.

5 5. The composition of claim 3, wherein said second chemical additive (b) comprises a dialkoxylated C₁ to C₂₀ non-friction reducing hydrocarbylamine and wherein said first chemical additive (a) is free from any dialkoxylated amine
10 moieties.

6. The composition of claim 5, wherein said second chemical additive (b) comprises diethoxylated n-butylamine.

15

7. The composition of claim 2, wherein said first chemical additive (a) comprises a substantially linear hydrocarbyl friction reducing substituent group containing at least 10 carbon
20 atoms.

8. The composition of claim 2, wherein said second chemical additive (b) comprises a substantially hydrocarbyl non-friction reducing
25 substituent group containing fewer than 10 carbon atoms.

9. An additive concentrate for controlling the absolute values of the friction coefficients and for
30 improving the friction durability of an oleaginous composition which comprises: (i) a major amount of an oil of lubricating viscosity; and (ii) a combination of chemical additives comprising a first chemical additive (a) comprising a polar head group
35 other than a dialkoxylated amino group and a friction reducing substituent group, and a second chemical additive (b) having a dialkoxylated amino

This Sheet Has Been Replaced



* C L M S *

THIS SHEET HAS BEEN
REPLACED

23


polar head group and a non-friction reducing
substituent group.

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced




FIGURE 1

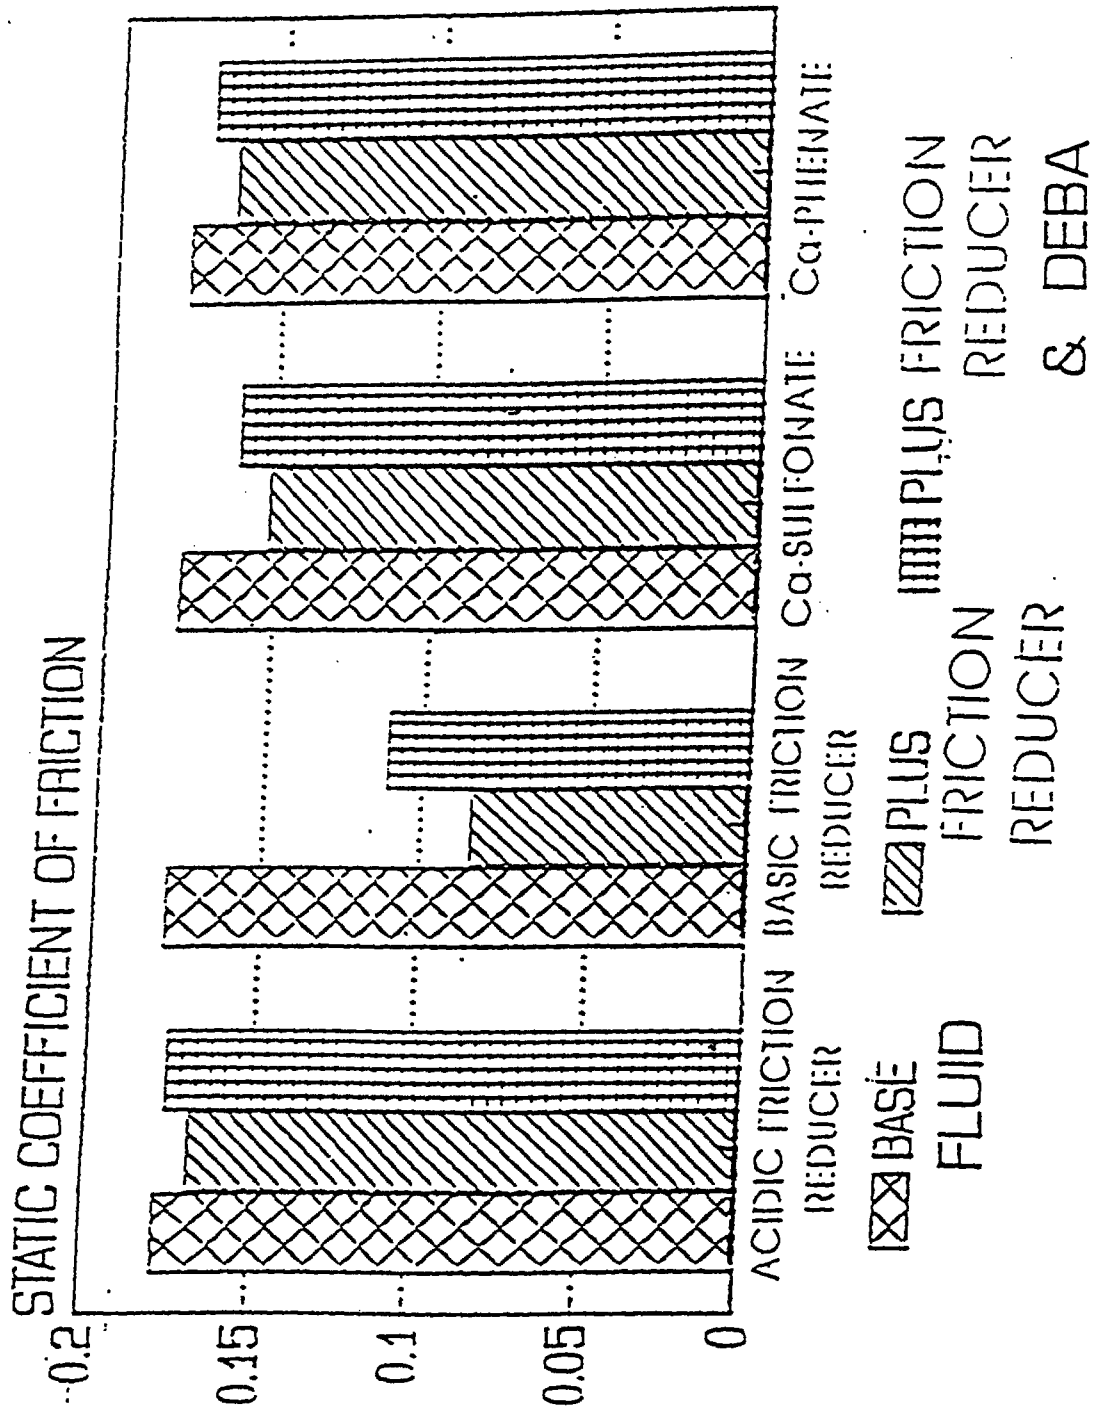

THIS SHEET HAS BEEN
REPLACED

2 / 3

FIGURE 2

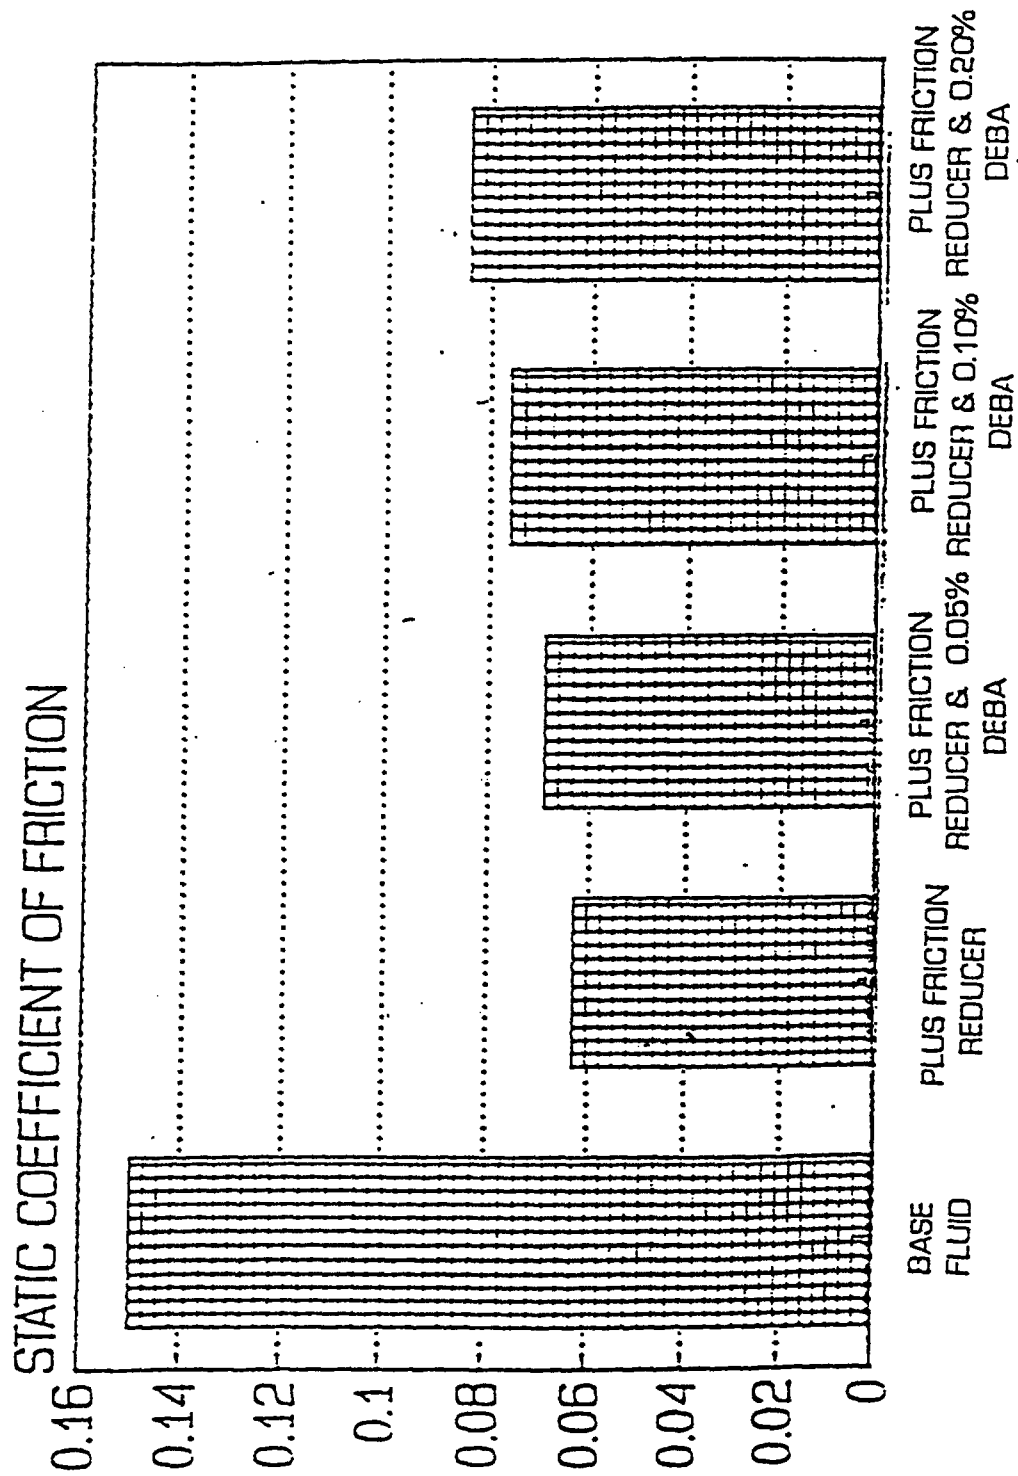


THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



FIGURE 3

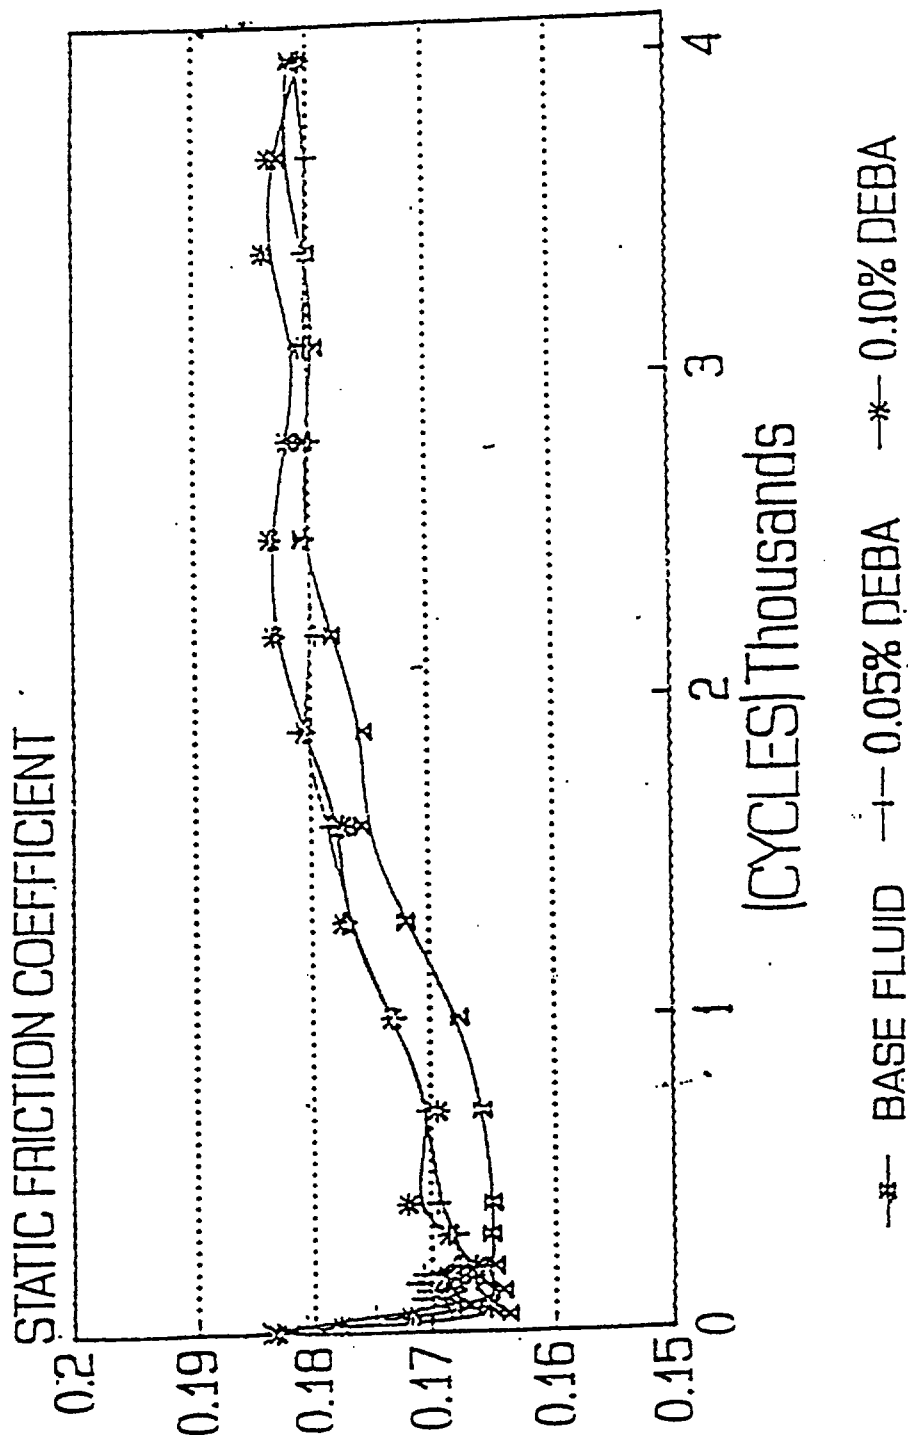

01 MAR 1997

1

INCREASING THE FRICTION DURABILITY OF POWER
TRANSMISSION FLUIDS THROUGH THE USE OF OIL
SOLUBLE COMPETING ADDITIVES

Background of the Invention


Field of the Invention

The present invention relates to a method of and compositions for improving the friction durability of power transmission fluids.

Description of Related Prior Art

Power transmission fluids, such as automatic transmission fluids, are formulated to very exacting friction requirements set by original equipment manufacturers. These requirements have two primary aspects, namely: (1) the absolute level of the friction coefficients, i.e., static friction, μ_s , and dynamic friction, μ_d , that can be achieved by these fluids, and (2) the length of time that these fluids can be used without undergoing an appreciable change in the friction coefficients. This latter performance feature is also known as friction durability.

Since friction durability is a function of the type and concentration of friction modifier molecules present in a given fluid, such as a power transmission fluid, conventionally there are only limited ways of improving friction durability. One of these ways is to add more friction modifier, i.e., to increase the concentration of friction modifier in the fluid. Since friction modifiers are consumed at a somewhat fixed rate, this will prolong the effective life of the fluid. However, this approach often is not very practical because increasing the concentration of the friction modifier usually will result in a lowering of the absolute values of the friction coefficients to a



point where they are below the minimum values specified by the original equipment manufacturer. Then, as the friction modifier is consumed with time, the friction coefficients will slowly rise to unacceptable levels. The other conventional approach for improving friction durability is to find more stable friction modifiers. This is not always easy since most friction modifiers are simple organic chemicals and are subject to oxidation and chemical reactions during service.

Various compositions and methods have been suggested for modifying the properties of oleaginous fluids. For example, U.S. Patent 4,253,977 relates to an ATF composition which comprises a friction modifier such as n-octadecyl succinic acid or the reaction product of an alkyl or alkenyl succinic anhydride with an aldehyde/tris hydroxymethyl aminomethane adduct and an overbased alkali or alkaline earth metal detergent. The ATF may also contain a conventional hydrocarbyl-substituted succinimide ashless dispersant such as polyisobutenyl succinimide. Other patents which disclose ATF compositions that include conventional alkenyl succinimide dispersants include, for example, U.S. Patents 3,879,306; 3,920,562; 3,933,659; 4,010,106; 4,136,043; 4,153,567; 4,159,956; 4,596,663 and 4,857,217; British Patents 1,087,039; 1,474,048 and 2,094,339; European Patent Application 0,208,541(A2); and PCT Application WO 87/07637.

U.S. Patent 3,972,243 discloses traction drive fluids which comprise gem-structured polyisobutylene oligomers. Polar derivatives of such gem-structured polyisobutylenes can be obtained by conversion of the polyisobutylene oligomers to polar compounds containing such functional groups as amine, imine, thioketone, amide, ether, oxime, maleic anhydride,

etc. adducts. The polyisobutylene oligomers generally contain from about 16 to about 48 carbon atoms. Example 18 of this patent discloses reacting a polyisobutylene oil with maleic anhydride to form a polyisobutylene succinic anhydride which is useful as a detergent, as an anti-wear agent, and as an intermediate in the production of a hydrazide derivative. Other patents containing similar disclosures include, for example, U.S. Patent 3,972,941; U.S. Patent 3,793,203; U.S. Patent 3,778,487 and U.S. Patent 3,775,503.

While the prior art suggests a variety of additives for modifying the properties of various oleaginous compositions, there is no suggestion of any additives, nor of any combination of additives, which can simultaneously control the friction coefficients and friction durability of such compositions. Accordingly, there is a continuing need for new additives, as well as new methods, which would enable the formulation of oleaginous compositions, including lubricating oils and power transmission fluids, having specifically controlled friction coefficients and improved friction durability.

Summary of the Invention

In one embodiment, the invention relates to a method of controlling the friction coefficients and improving the friction durability of an oleaginous composition, which comprises:

adding to a major portion of an oil of lubricating viscosity a friction controlling and friction durability improving effective amount of an oil soluble combination of chemical additives comprising (a) a first chemical additive comprising a first polar head group other than a dialkylloxylated amino group and a friction reducing

01 MAR 1997

substituent group, and (b) at least one other chemical additive having a dialkoxylated amino polar head group and a non-friction reducing substituent group.

Description of the Drawings

Figure 1 is a bar graph illustrating the static coefficient of friction, determined at 93°C, using a Low Velocity Friction Apparatus (LVFA), for (1) a base fluid, (2) the base fluid plus a friction reducer and (3) the base fluid plus a combination of a friction reducer and diethoxylated-n-butylamine (DEBA) as a non-friction reducing additive;

Figure 2 is a bar graph illustrating the static coefficient of friction, determined at 149°C, using a LVFA, for (1) a base fluid, (2) the base fluid plus a friction reducer, (3) the base fluid plus a friction reducer and 0.05 wt.% DEBA, (4) the base fluid plus a friction reducer and 0.1 wt.% DEBA, and (5) the base fluid plus a friction reducer and 0.2 wt.% DEBA; and

Figure 3 is a graph illustrating the static coefficient of friction versus the number of test cycles as tested in the MERCON® 4,000 cycle friction test, as described in the FORD MOTOR COMPANY MERCON specification, of (1) a base fluid, (2) the base fluid plus 0.05 wt.% DEBA, and (3) the base fluid plus 0.1 wt.% DEBA.


Detailed Description of the Invention

A primary advantage of the present invention is that it enables the fluid formulator to increase the concentration of the active friction reducer without reducing the absolute values of the friction coefficients to a point below the minimum specified by the original equipment manufacturer. This is accomplished by placing in the oleaginous

01 MAR 1957

composition, such as an automatic transmission fluid, a friction reducing chemical additive (Component A) and a non-friction reducing chemical additive containing a dialkoxylated amino polar head group (Component B). For example, a long chain carboxylic acid, such as oleic acid or isostearic acid, or a branched chain hydrocarbyl substituted amide, such as the reaction product of isostearic acid and tetraethylene pentamine (TEPA), can be added as a friction reducing additive along with an ethoxylated butylamine amine non-friction reducing additive.

While not wishing to be bound by a particular theory, it is believed that once in the fluid, the two chemical additives compete for the surfaces which are contacted. Accordingly, not all of the friction reducing additive will contact the surfaces even if there is an excess of friction reducer in the fluid. This enables the formulator to intentionally add more friction reducing additive to the fluid than could normally be tolerated without lowering the friction coefficients to a level below the minimum specified by the original equipment manufacturer. Then, as the additives which are in contact with the surfaces are slowly consumed, an additional portion of the excess friction reducer and competing dialkoxylated amine originally present in the fluid can come in contact with the surfaces, thereby maintaining the friction coefficients at the desired levels. Thus, by adding the friction reducing chemical additive and the dialkoxylated amino group containing non-friction reducing chemical additive in an appropriate ratio, the friction coefficients of the resulting fluid will remain essentially constant over a long period of use, i.e., the fluid will exhibit a substantially improved friction durability relative to fluids



containing only a friction reducing chemical additive or only a non-friction reducing additive.

Component A


The oil soluble friction reducing additives (Component A) contemplated for use in this invention comprise any of those chemical additives conventionally employed for reducing the friction coefficients of oleaginous fluids to which they are added. Typically, such friction reducing additives comprise a polar head group and a friction reducing substituent group which is linked to the polar head group.

The friction reducing substituent group normally would comprise a substantially linear hydrocarbyl group having at least about 10 carbon atoms, typically from about 10 to about 30 carbon atoms, and preferably from about 14 to about 18 carbon atoms. Examples of such linear hydrocarbyl groups include, but are not limited to oleyl, isostearyl and octadecenyl groups.

The polar head groups which are contemplated for use in the present invention vary widely and include any polar group, other than a dialkoxylated amino group, which is conventionally present in a friction reducing additives. Typically, however, the polar head groups present in the friction reducing additives contemplated for use in this invention include, for example, polar head groups having the following moieties:


01 MAR 1997

7

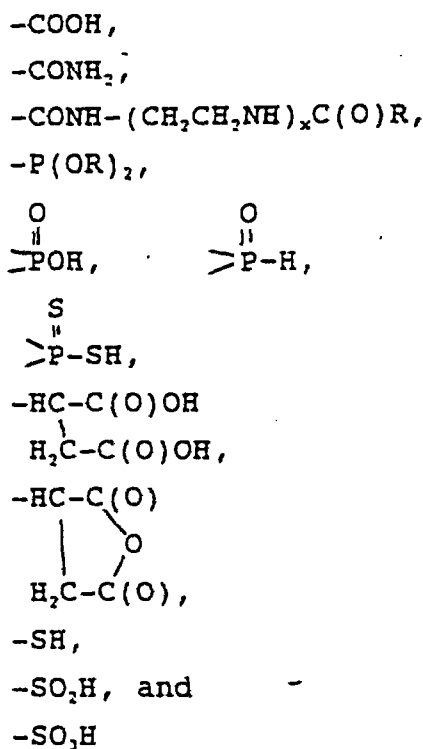

wherein R represents a C_1 to C_{30} linear or branched hydrocarbyl group and x represents an integer of from 1 to about 8.

In one aspect, the friction reducing additive may be represented by formula I:




wherein A represents a substantially linear, long chain hydrocarbyl group; L represents a linking group; and P represents a polar head group, preferably a nitrogen-containing polar head group.

The linear hydrocarbyl group A typically contains from about 12 to about 50 carbon atoms and typically has a molecular weight on the order of from about 150 to about 700.

Suitable hydrocarbyl groups include alkyl and alkenyl groups, such as oleyl, octadecyl, octadecenyl, isostearyl, and hetero atom-containing analogs thereof.

atoms. A variety of hetero atoms can be used and are readily apparent to those skilled in the art. Suitable hetero atoms include, but are not limited to, nitrogen, oxygen, phosphorus, and sulfur. Preferred hetero atoms are sulfur and oxygen. Suitable linear hydrocarbyl groups include, for example, hexadecyloxypropyl, octadecylthiopropyl, hexadecyloxyethyl and tetradecyloxyethyl.

The linking group typically is derived from a monounsaturated carboxylic reactant comprising at least one member selected from the group consisting of (i) monounsaturated C₄ to C₁₀ dicarboxylic acid wherein (a) the carboxyl groups are vicinyl, (i.e. located on adjacent carbon atoms) and (b) at least one, preferably both, of said adjacent carbon atoms is part of said monounsaturation; (ii) derivatives of (i) such as anhydrides or C₁ to C₃ alcohol derived mono- or diesters of (i); (iii) monounsaturated C₃ to C₁₀ monocarboxylic acid wherein the carbon-carbon double bond is allylic to the carboxy group, i.e., of the structure




and (iv) derivatives of (iii) such as C₁ to C₃ alcohol derived mono- or diesters of (iii). Upon reaction with the linear hydrocarbyl group reactant, the monounsaturation of the carboxylic reactant becomes saturated. Thus, for example, maleic anhydride becomes a linear hydrocarbyl group substituted succinic anhydride, and acrylic acid becomes a linear hydrocarbyl substituted propionic acid.

Exemplary of such monounsaturated carboxylic reactants are fumaric acid, itaconic acid, itaconic anhydride, maleic acid, maleic anhydride, chloromaleic acid, chloromaleic anhydride, acrylic

6 MAR 1957


acid, methacrylic acid, crotonic acid, hemiac anhydride, cinnamic acid, and lower alkyl (e.g., C_1 to C_4 alkyl) acid esters of the foregoing, e.g., methyl maleate, ethyl fumarate, methyl fumarate, etc.

Maleic anhydride or a derivative thereof is preferred as it does not homopolymerize appreciably, but attaches onto the linear hydrocarbyl group to give two carboxylic acid functionalities. Such preferred materials have the generic formula II:

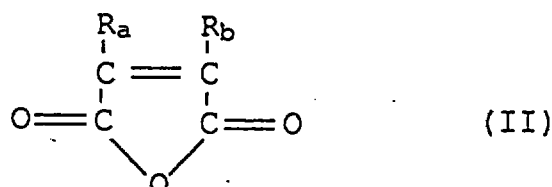

wherein R_a and R_b are hydrogen or a halogen.

In addition to the unsaturated carboxylic acid materials described above, the linking group may comprise the residue of a functionalized aromatic compound, such as a phenol or a benzene sulfonic acid. Thus, in one preferred aspect of the invention, the linking group may be illustrated by formula III:

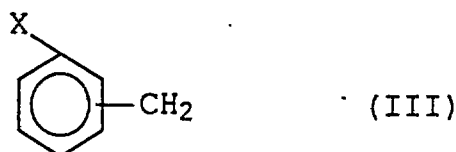

wherein X is a functional group such as OH, Cl or SO_3H .

In such cases, the friction reducers may be prepared, for example, by a conventional Mannich Base condensation of aldehyde, (e.g., formaldehyde), polar group precursor (e.g. alkylene polyamine) and hydrocarbyl group substituted phenol. The following U.S. patents contain extensive disclosures relative to the production of Mannich condensates and to that extent, these patents are incorporated herein by

01 MAR 1997

reference: 2,459,112; 2,962,442; 3,355,270; 3,448,047; 3,600,372, 3,649,729 and 4,100,082.


Sulfur-containing Mannich condensates also may be used and such condensates are described, for example, in U.S. Patents 3,368,972; 3,649,229; 3,600,372; 3,649,659 and 3,741,896. These patents are incorporated herein by reference to the extent that they disclose sulfur-containing Mannich condensates. Generally, the condensates useful in this invention are those made from a phenol having a linear hydrocarbyl substituent of at least about 10, typically about 10 to about 50 carbon atoms, more typically, 12 to about 36 carbon atoms. Typically these condensates are made from formaldehyde or a C₂ to C₇ aliphatic aldehyde and an amino compound.

These Mannich condensates are prepared by reacting about one molar portion of linear hydrocarbyl substituted phenolic compound with about 1 to about 2.5 molar portions of aldehyde and about 1 to about 5 equivalent portions of amino compound (an equivalent of amino compound is its molecular weight divided by the number of >NH groups present). The conditions under which the condensation reactions are carried out are well known to those skilled in the art as evidenced by the above-noted patents. Accordingly, the above-noted patents are incorporated by reference for their disclosures relating to reaction conditions.


As indicated above, the polar head group may vary widely and typically comprises the residue of an amine compound, i.e. polar group precursor, containing at least 1, typically 2 to 60, and preferably 2 to 40 total carbon atoms, and at least 1, typically 2 to 15, and preferably 2 to 9 nitrogen atoms, with at least one nitrogen atom preferably being present in a primary or secondary amine group. The amine compounds may be hydrocarbyl amines or may

be hydrocarbyl amines including other groups, e.g., hydroxy groups, alkoxy groups, amide groups, nitrile groups, imidazole groups, morpholine groups or the like. The amine compounds also may contain 1 or more boron or sulfur atoms, provided that such atoms do not interfere with the substantially polar nature and function of the selected polyamine. It is to be understood, however, that the polar groups contemplated for use in this invention may not comprise dialkoxylated amino groups.

Useful amines include those of formulas IV and V:




wherein R^4 , R^5 , R^6 and R^7 are independently selected from the group consisting of hydrogen, C_1 to C_{25} linear or branched alkyl radicals, C_1 to C_{12} alkoxy C_2 to C_6 alkylene radicals, C_2 to C_{12} hydroxy amino alkylene radicals, and C_1 to C_{12} alkylamino C_2 to C_6 alkylene radicals; and wherein R^7 can additionally comprise a moiety of the formula:



wherein R^5 is defined above; wherein s and s' can be the same or a different number of from 2 to 6, preferably 2 to 4; and t and t' can be the same or a different number of from 0 to 10, preferably 0 to 7 with the proviso that the sum of t and t' is not greater than 15; and with the further proviso that not more than one of R^4 , R^5 and R^6 may comprise a C_1 to C_{12} alkoxy C_2 to C_6 alkylene radical.


Non-limiting examples of suitable amine compounds include: 1,2-diaminoethane, 1,6-diaminohexane; polyethylene amines such as tetraethylene pentamine; polypropylene amines such as 1,2-propylene diamine; di-(1,2-propylene) diamine; di-(1,2-propylene) triamine; di-(1,3-propylene) triamine; N,N-dimethyl-1,3-diaminopropane; N,N-di(2-aminoethyl) ethylene diamine; N,N-di(2-hydroxyethyl) 1,3-propylene diamine; 3-dodecyloxy-propylamine, N-dodecyl-1,3-propane diamine, etc.

Other suitable amines include: amino morpholines such as N-(3-aminopropyl) morpholine and N-(2-aminoethyl) morpholine; substituted pyridines such as 2-amino pyridine, 2-methylamino pyridine and 2-methylamino pyridine; and others such as 2-aminothiazole; 2-amino pyrimidine; 2-amino benzothiazole; methyl-1-phenyl hydrazine and para-morpholino aniline, etc. A preferred group of aminomorpholines are those of formula VI:



where r is a number having a value of 1 to 5.

Useful amines also include alicyclic diamines, imidazolines and N-aminoalkyl piperazines of formula VII:

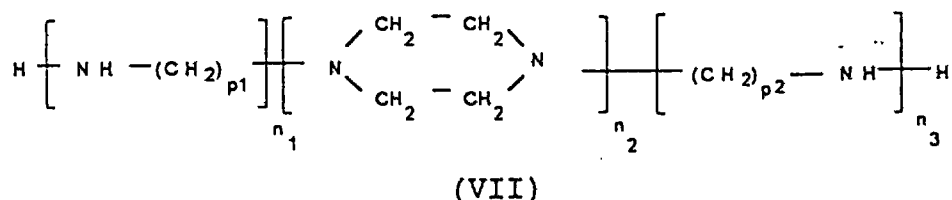


wherein p_1 and p_2 are the same or different and each is an integer of from 1 to 4; and n_1 , n_2 and n_3 are the same or different and each is an integer of from 1 to 3.


01 MAR 1997

Commercial mixtures of amine compounds may advantageously be used. For example, one process for preparing alkylene amines involves the reaction of an alkylene dihalide (such as ethylene dichloride or propylene dichloride) with ammonia, which results in a complex mixture of alkylene amines wherein pairs of nitrogens are joined by alkylene groups, forming such compounds as diethylene triamine, triethylenetetramine, tetraethylene pentamine and corresponding piperazines. Low cost poly(ethyleneamine) compounds averaging about 5 to 7 nitrogen atoms per molecule are available commercially under trade names such as "Polyamine H", "Polyamine 400", "Dow Polyamine E-100", etc.

Useful amines also include polyoxyalkylene polyamines such as those having formula VIII:



wherein m has a value of at least 3 and "alkylene" represents a linear or branched chain C_2 to C_7 , preferably C_2 to C_4 alkylene radical; or formula IX:




wherein R^a is a polyvalent saturated hydrocarbon radical having up to 10 carbon atoms and the number of substituents on the R^a group is represented by the value of " a ", which is a number of from 3 to 6, wherein m' has a value of at least 1; and wherein "alkylene" represents a linear or branched chain C_2 to C_7 , preferably C_2 to C_4 alkylene radical.

The polyoxyalkylene polyamines of formulas (VIII) or (IX) above, preferably polyoxyalkylene diamines and polyoxyalkylene triamines, may have average molecular weights ranging from about 200 to about 4000 and preferably from about 400 to about

01 MAR 1997

2000. The preferred polyoxyalkylene polyamines include the polyoxyethylene and polyoxypropylene polyamines. The polyoxyalkylene polyamines are commercially available and may be obtained, for example, from the Jefferson Chemical Company, Inc. under the trade name "Jeffamines D-230, D-400, D-1000, D-2000, T-403", etc.

The polar group may be joined to the linking group through an ester linkage when the linking group is a carboxylic acid or anhydride. To incorporate polar groups of this type, they must have a free hydroxyl group and all of the nitrogen atoms in the polar group must be tertiary nitrogen atoms. Polar groups of this type are represented by formula X:



wherein n has a value of from 1 to 10, R and R' are H or C₁ to C₁₂ alkyl, and R'' and R''' are C₁ to C₆ alkyl.

Forming the Friction Reducing Additives

In accordance with one aspect of the invention, the friction reducing additives may be prepared by reacting a long chain linear carboxylic acid, such as oleic acid or isostearic acid, with a polar group precursor, preferably a nitrogen-containing polar group precursor, such as tetraethylene pentamine or diethylene triamine, to form the corresponding long linear hydrocarbyl amide.


Typically, from about 5 to about 0.5, preferably from about 3 to about 1, and most preferably from about 1.5 to about 1 moles of said carboxylic acid reactant are charged to the reactor

per mole of primary nitrogen contained in the polar group precursor. The long chain linear carboxylic acid reactant may be readily reacted with a polar group precursor, i.e., amine compound, by heating at a temperature of from about 100°C. to 250°C., preferably from 120° to 230°C., for a period of from about 0.5 to 10 hours, usually about 1 to about 6 hours.

Alternatively, as discussed above, the polar group precursor may be reacted with an aldehyde and a hydrocarbyl substituted phenol in a conventional manner to form Mannich condensates having friction reducing properties.

Component B

The oil soluble non-friction reducing additives (Component B) contemplated for use in this invention comprise dialkoxylated amino compounds represented by formula (XI):



where R^9 is a C_1 to C_8 linear alkyl group, C_2 to C_{20} branched alkyl group or $-CH_2CH_2OH$; and R^{10} is H or a C_1 to C_8 linear or branched alkyl group.

Typically R^9 is a C_2 to C_6 linear alkyl group, preferably a C_4 alkyl group. In a particularly preferred aspect of the invention, R^9 is n-butyl and R^{10} is H.

Typically, for non-friction reducing additives, the long chain, linear hydrocarbyl substituent group which is present in the friction reducing additives would be replaced with a shorter chain linear or branched hydrocarbyl substituent group, e.g., one having a chain length of less than about 10 carbon

01 MAR 1997

atoms. Thus, hydrocarbyl groups such as butyl, hexyl or octyl would be typical of those hydrocarbyl groups that would be present in the non-friction reducing additives contemplated for use in this invention.

Representative examples of chemical additives which would be useful as the non-friction reducing additive include, but are not limited to diethoxylated butylamine and diethoxylated hexylamine.

Compositions

A minor amount, e.g., 0.01 up to about 50 wt. %, preferably 0.1 to 10 wt. %, and more preferably 0.5 to 5 wt. %, of a combination of at least one friction reducing chemical additive (Component A) and at least one non-friction reducing chemical additive (Component B) and can be incorporated into a major amount of an oleaginous material, such as a lubricating oil, depending upon whether one is forming finished products or additive concentrates. The relative amounts of friction reducing additive and non-friction reducing additive can vary over wide limits depending in part upon the identity of the specific additives. However, the mole ratio of the friction reducing additive to non-friction reducing additive typically will be from about 1:99 to 99:1, and preferably from about 1:10 to 10:1.

When used in lubricating oil compositions, e.g., automatic transmission formulations, etc. the final combined concentration of the friction reducing additive and the non-friction reducing additive typically will be in the range of from about 0.01 to 30 wt. %, e.g., 0.1 to 15 wt. %, preferably 0.5 to 10.0 wt. %, of the total composition. The lubricating oils to which the combination of additives of this invention can be

01 MAR 1997

added include not only hydrocarbon oils derived from petroleum, but also include synthetic lubricating oils such as esters of dicarboxylic acids; complex esters made by esterification of monocarboxylic acids, polyglycols, dicarboxylic acids and alcohols; polyolefin oils, etc.

The combination of the friction reducing additive and the non-friction reducing additive may be utilized in a concentrate form, e.g., in a minor amount from about 0.1 wt. % up to about 50 wt. %, preferably 5 to 25 wt. %, in a major amount of oil, e.g., said synthetic lubricating oil with or without additional mineral lubricating oil.

The above oil compositions may contain other conventional additives, such as ashless dispersants, for example the reaction product of polyisobutylene succinic anhydride with polyethyleneamines of 2 to 10 nitrogens, which reaction product may be borated; antiwear agents such as zinc dialkyl dithiophosphates; viscosity index improvers such as polyisobutylene, polymethacrylates, copolymers of vinyl acetate and alkyl fumarates, copolymers of methacrylates with amino methacrylates; corrosion inhibitors; oxidation inhibitors; friction modifiers; metal detergents such as overbased calcium magnesium sulfonates, phenate sulfides, etc.

The following examples, wherein all parts or percentages are by weight unless otherwise noted, which include preferred embodiments, further illustrate the present invention.

Preparative Examples

EXAMPLE 1

Standard automatic transmission fluids (ATF's) were prepared for testing the friction characteristics of various combinations of friction additives. The fluids were prepared by blending the

01 MAR 1957

friction additives indicated in TABLE 1 into an additive concentrate, and then dissolving the concentrate into a mineral oil base fluid (Exxon FN 1391) to give the required concentration of additives. The basic test fluids contained approximately 10 weight % of additives, including dispersant, anti-wear agent, corrosion inhibitor, antioxidant, anti-foamant, viscosity modifier and the indicated amount of the specified friction reducing and/or non-friction reducing additive.

TABLE 1

Test Fluid	Friction Reducing Additive. Wt. %	Non-Friction Reducing Additive. Wt. %
A-1	thiobisethanol ester ¹ , 0.4 %	NONE
A-2	thiobisethanol ester, 0.4 %	DEBA ² , 0.05 %
B-1	ISA/TEPA ³ , 0.2 %	NONE
B-2	ISA/TEPA, 0.2 %	DEBA, 0.05 %
C-1	Basic calcium sulfonate ⁴ , 0.2 %	NONE
C-2	Basic calcium sulfonate ⁴ , 0.2 %	DEBA, 0.05 %
D-1	Basic calcium phenate ⁵ , 0.2 %	NONE
D-2	Basic calcium phenate ⁵ , 0.2 %	DEBA, 0.05 %

¹ octadecenylsuccinic acid ester of thiobisethanol

² diethoxylated n-butylamine

³ isostearic acid/tetraethylene pentamine reaction product (3.1:1 mole ratio)

⁴ Hitec E-611, Ethyl Corporation

⁵ Paranox 52, Exxon Chemicals

01 MAR 1997

The static coefficient of each test fluid was determined at 93° C, using the Low Velocity Friction Apparatus (LVFA). The results of this testing are shown in Figure 1. For each test fluid, the first bar (on left) shows the static friction coefficient of the base test fluid without any friction reducing or non-friction reducing additives (0.178). The center bar shows the static friction depression caused by the indicated friction reducing additive. The third bar shows the increase in static friction due to the addition of 0.05 mass percent of DEBA. In all cases significant increase of static friction resulted from the addition of even this small amount of DEBA. The phenomenon was observed with all types of friction reducing additives, i.e., acidic, basic, or metal containing friction reducing additives. Also the more potent the friction reducing additive, i.e., the greater the friction reduction caused by the friction reducing additive, the more pronounced was the effect caused by the DEBA.

EXAMPLE 2

Using the base test fluid from Example 1, i.e., the mineral oil base fluid and the various additives (but without any friction reducing additives or non-friction reducing additives) two additional test fluids were prepared. The additional test fluids contained the friction additives set forth in TABLE 2.

TABLE 2

<u>Test Fluid</u>	<u>Friction Reducing Additive, Wt. %</u>	<u>Non-Friction Reducing Additive, Wt. %</u>
B-3	thiobisethanol ester, 0.4 %	DEBA, 0.1 %
B-4	Same	DEBA, 0.2 %
Base Fluid	None	None

The static coefficient of blends B-1 through B-4, as well as that of the base test fluid blend (with no friction additives), was determined at 149° C using the LVFA. The results of this testing are shown in Figure 2. Figure 2 shows that with increasing amounts of DEBA the static coefficient of friction continues to increase. Therefore, it should be possible to accurately select whatever static coefficient of friction is desired between 0.062 and 0.150 by using the appropriate amount of DEBA.


EXAMPLE 3

Two more blends were prepared using the base test fluid blend described in Example 1, in combination with the amount of DEBA indicated in TABLE 3.

TABLE 3

<u>Test Fluid</u>	<u>Friction Reducing Additives, Wt. %</u>	<u>Non-Friction Reducing Additive, Wt. %</u>
E-1	None	DEBA, 0.05 %
E-2	None	DEBA, 0.1 %
Base Fluid	None	None

These two fluids, along with the base blend, were tested in the MERCON® 4000 cycle friction test, as described in the Ford MERCON Specification dated May 1987, Section 3.8. The static coefficient of friction as determined in this test is plotted versus test cycles in Figure 3. Figure 3 shows that DEBA, in and of itself, is not a friction increaser. Rather, DEBA functions to increase the static friction of a fluid containing both DEBA and a friction reducing additive by competing for the friction surface with the friction reducing additive.



21

CLAIMS:

1. A method of controlling the friction coefficients and improving the friction durability of an oleaginous composition, which comprises:
adding to a major portion of an oil of lubricating viscosity a friction controlling and friction durability improving effective amount of an oil soluble combination of chemical additives comprising (a) a first chemical additive comprising a polar head group other than a dialkoxylated amino group and a friction reducing substituent group, and (b) a second chemical additive having a dialkoxylated amino polar head group and non-friction reducing substituent group.
2. An oleaginous composition comprising a major amount of an oil of lubricating viscosity and an amount effective for controlling the friction coefficients and for improving the friction durability of said composition of an additive composition comprising (a) a first chemical additive comprising a polar head group other than a dialkoxylated amino group and a friction reducing substituent group, and (b) a second chemical additive having a dialkoxylated amino polar head group and a non-friction reducing substituent group.
3. The composition of claim 2, wherein said first chemical additive (a) comprises a member selected from the group consisting of acidic friction reducing additives, basic friction reducing additives, metal containing friction reducing additives and mixtures thereof.
4. The composition of claim 3, wherein said first chemical additive (a) is selected from the group consisting of octadecenylsuccinic acid ester

THIS SHEET HAS BEEN
REPLACED



REPLACEMENT SHEET

01 MAR 1997

22

of thiobisethanol, isostearic acid/TEPA, basic calcium sulfonate, basic calcium phenate and mixtures thereof.

5. The composition of claim 3, wherein said second chemical additive (b) comprises a dialkoxylated C_1 to C_{20} non-friction reducing hydrocarbylamine and wherein said first chemical additive (a) is free from any dialkoxylated amine moieties.

6. The composition of claim 5, wherein said second chemical additive (b) comprises diethoxylated n-butylamine.

7. The composition of claim 2, wherein said first chemical additive (a) comprises a substantially linear hydrocarbyl friction reducing substituent group containing at least 10 carbon atoms.

8. The composition of claim 2, wherein said second chemical additive (b) comprises a substantially hydrocarbyl non-friction reducing substituent group containing fewer than 10 carbon atoms.

9. An additive concentrate for controlling the absolute values of the friction coefficients and for improving the friction durability of an oleaginous composition which comprises: (i) a major amount of an oil of lubricating viscosity; and (ii) a combination of chemical additives comprising a first chemical additive (a) comprising a polar head group other than a dialkoxylated amino group and a friction reducing substituent group, and a second chemical additive (b) having a dialkoxylated amino

THIS SHEET HAS BEEN
REPLACED




23

polar head group and a non-friction reducing
substituent group.

REPLACEMENT SHEET

0 1 MAR 1997

THIS SHEET HAS BEEN
REPLACED



INCREASING THE FRICTION DURABILITY OF POWER
TRANSMISSION FLUIDS THROUGH THE USE OF OIL
SOLUBLE COMPETING ADDITIVES

ABSTRACT

A method of controlling the friction coefficient and improving the friction durability of an oleaginous composition, such as an ATF, comprising adding to the composition a combination of competing additives comprising (a) at least one friction reducing chemical additive having a polar head group other than a dialkoxylated amino group and a friction reducing substituent group, and at least one non-friction reducing additive (b) having a dialkoxylated amino polar head group and having a substituent group which has no material friction raising or lowering effect (non-friction reducing additive) on the composition.

THIS SHEET HAS BEEN
REPLACED

FIGURE 1

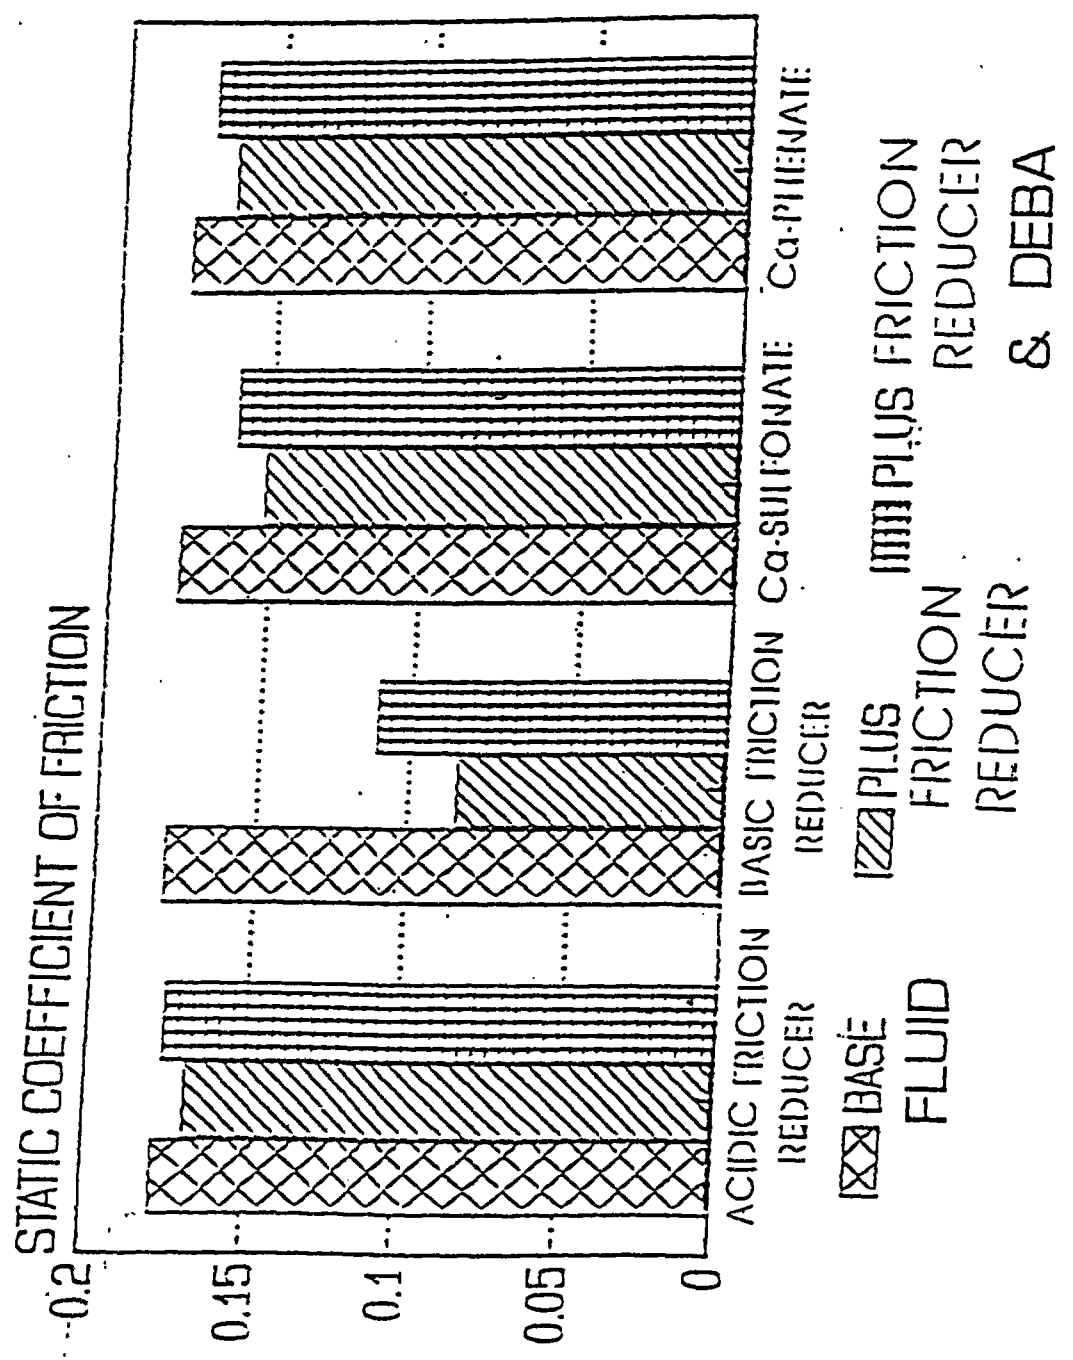


FIGURE 2



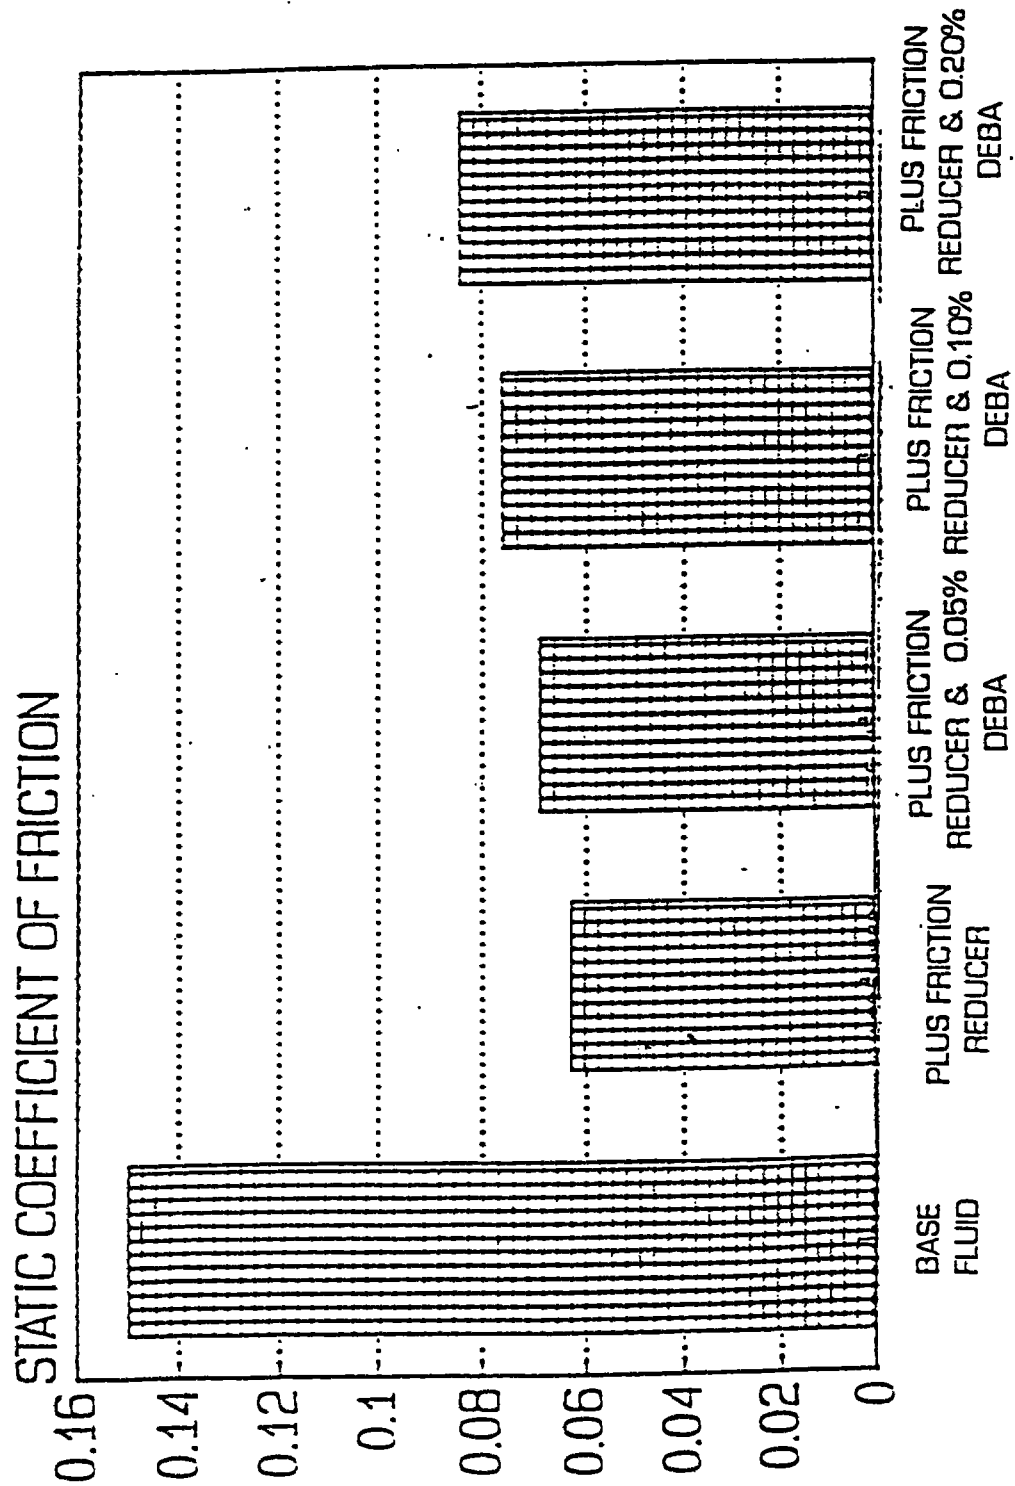


FIGURE 3

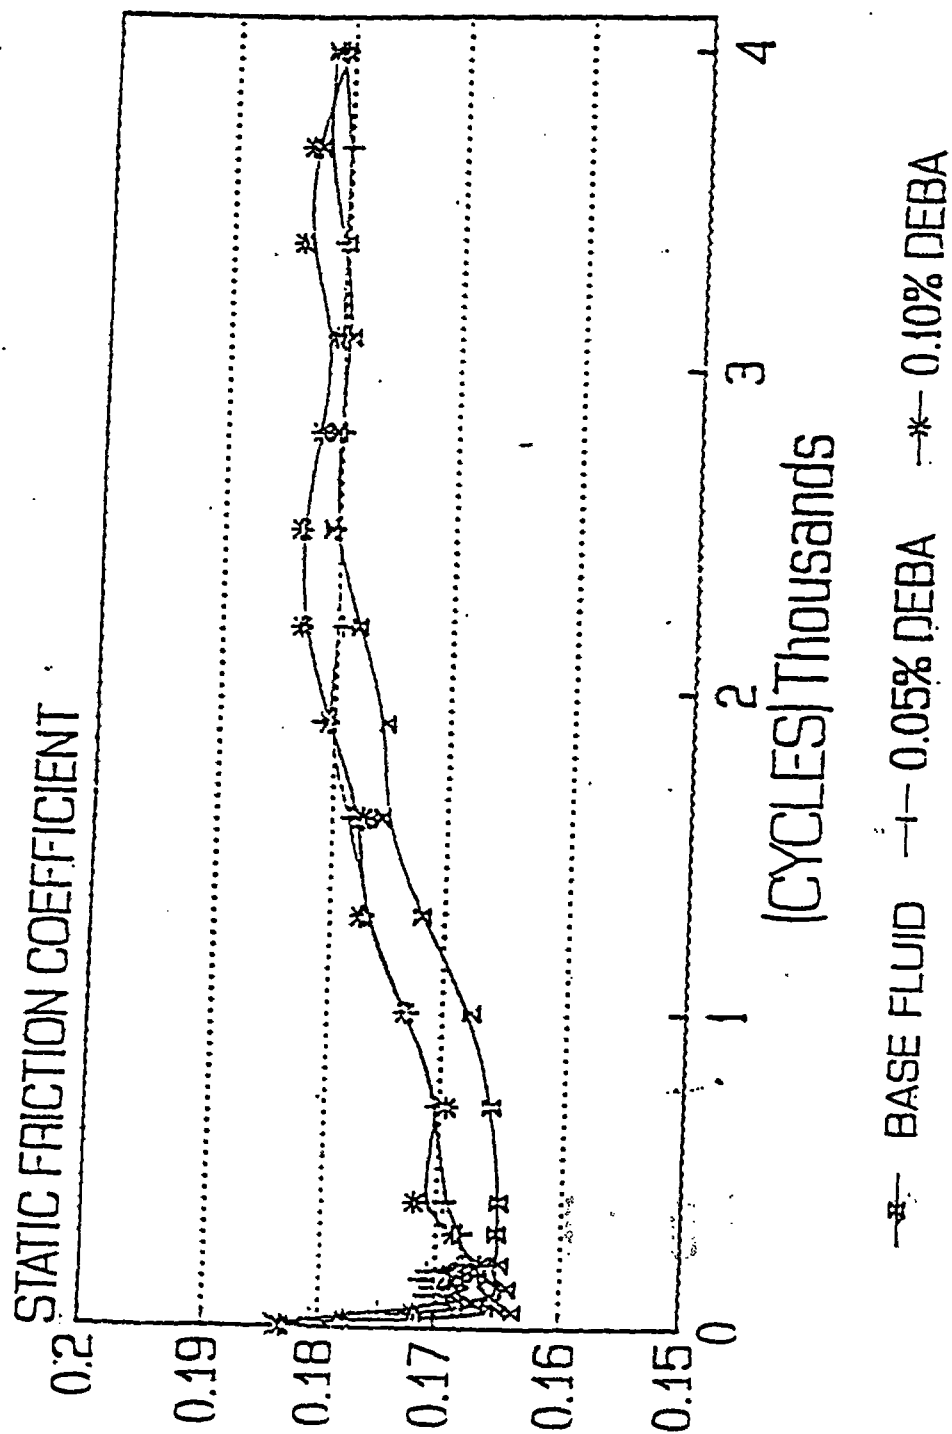



INCREASING THE FRICTION DURABILITY OF POWER
TRANSMISSION FLUIDS THROUGH THE USE OF OIL
SOLUBLE COMPETING ADDITIVES

ABSTRACT

A method of controlling the friction coefficient and improving the friction durability of an oleaginous composition, such as an ATF, comprising adding to the composition a combination of competing additives comprising (a) at least one friction reducing chemical additive having a polar head group other than a dialkoxylated amino group and a friction reducing substituent group, and at least one non-friction reducing additive (b) having a dialkoxylated amino polar head group and having a substituent group which has no material friction raising or lowering effect (non-friction reducing additive) on the composition.

FIGURE 1

THIS SHEET HAS BEEN REPLACED



REPLACEMENT SHEET

02 FEB 1998

CLAIMS:

1. A method of controlling the friction coefficients and improving the friction durability of an oleaginous composition, which comprises, adding to a major portion of an oil of lubricating viscosity a friction controlling and friction durability improving effective amount of an oil soluble combination of chemical additives comprising (a) a first chemical additive comprising a polar head group other than a dialkoxylated amino group and a friction reducing substituent group comprising a substantially linear hydrocarbyl group having at least 10 carbon atoms, and (b) a second chemical additive having a dialkoxylated amino polar head group and non-friction reducing substituent group comprising a linear or branched hydrocarbyl group having less than 10 carbon atoms.
2. An oleaginous composition comprising a major amount of an oil of lubricating viscosity and an amount effective for controlling the friction coefficients and for improving the friction durability of said composition of an additive composition comprising (a) a first chemical additive comprising a polar head group other than a dialkoxylated amino group and a friction reducing substituent group comprising a substantially linear hydrocarbyl group having a least 10 carbon atoms, and (b) a second chemical additive having a dialkoxylated amino polar head group and a non-friction reducing substituent group comprising a linear or branched hydrocarbyl group having less than 10 carbon atoms.
3. The composition of claim 2, wherein said first chemical additive (a) comprises a member selected from the group consisting of acidic friction reducing additives, basic friction reducing additives, metal containing friction reducing additives and mixtures thereof.
4. The composition of claim 3, wherein said first chemical additive (a) is selected from the group consisting of octadecenylsuccinic acid ester of thioisethanol, isostearic acid/tetraethylene pentamine, basic calcium sulfonate, basic calcium phenate and mixtures thereof.




- 22 -

REPLACEMENT SHEET

0 2 FEB 1998

5. The composition of any preceding claim, wherein said second chemical additive (b) comprises a dialkoxylated C_1 to C_{20} non-friction reducing hydrocarbylamine and wherein said first chemical additive (a) is free from any dialkoxylated amine moieties.
6. The composition of claim 5, wherein said second chemical additive (b) comprises diethoxylated n-butylamine.

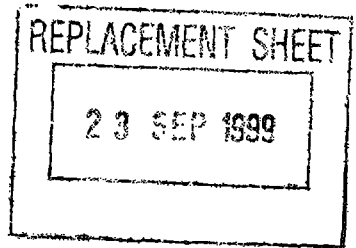

INCREASING THE FRICTION DURABILITY OF POWER
TRANSMISSION FLUIDS THROUGH THE USE OF OIL
SOLUBLE COMPETING ADDITIVES

ABSTRACT

A method of controlling the friction coefficient and improving the friction durability of an oleaginous composition, such as an ATF, comprising adding to the composition a combination of competing additives comprising (a) at least one friction reducing chemical additive having a polar head group other than a dialkoxylated amino group and a friction reducing substituent group, and at least one non-friction reducing additive (b) having a dialkoxylated amino polar head group and having a substituent group which has no material friction raising or lowering effect (non-friction reducing additive) on the composition.

FIGURE 1