(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
19 July 2001 (19.07.2001)

PCT

(10) International Publication Number
WO 01/52247 A1

(51) International Patent Classification[7]: G11B 5/596

(21) International Application Number: PCT/JP00/09212

(22) International Filing Date:
25 December 2000 (25.12.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2000-2057 11 January 2000 (11.01.2000) JP

(71) Applicant *(for all designated States except US)*: MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD. [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).

(72) Inventor; and

(75) Inventor/Applicant *(for US only)*: MORIOKA, Junichirou [JP/JP]; 841-9, Kita Umemotocho Ko, Matsuyama-shi, Ehime 791-0242 (JP).

(74) Agent: MORIMOTO, Yoshihiro; All Nippon Airways(Nishi-Hommachi)Bldg., 4th Floor, 10-10, Nishi-Hommachi 1-chome, Nishi-ku, Osaka-shi, Osaka 550-0005 (JP).

(81) Designated States *(national)*: CN, ID, KR, SG, US.

Published:
— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

G00001

(54) Title: DISC DEVICE MANUFACTURING METHOD AND DISC DEVICE

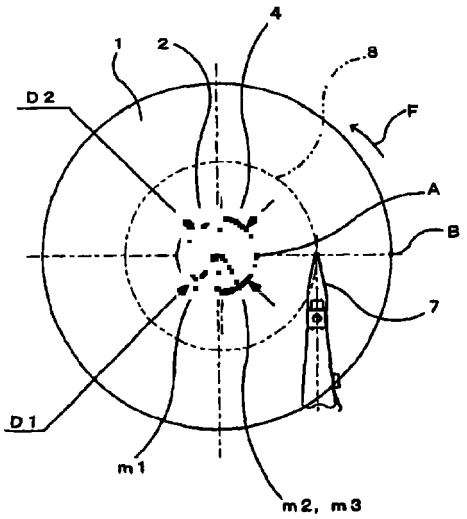

(57) Abstract: The present invention provides a method for manufacturing a disc device that prevents servo information from being decentered when the disc is rotatively driven and that uses a simple configuration to simplify a manufacturing process. A disc (1) is engaged with and mounted on a motor hub (4) of a servo writer such that a point A on an inner periphery of a center hole (2) of the disc (1) comes in contact with the motor hub (4). The disc (1) is then rotationally driven and servo information (8) is written to a surface of the disc (1) around a rotational axis of the motor hub (4). The disc (1) with the servo information written thereto is engaged with the motor hub of the disc device. Then, the disc (1) is mounted such that the point A of the center hole (2) of the disc (1), which has been in contact with the motor hub (4) of the servo writer, comes in contact with the motor hub of the disc device so that a center m(2) of the servo information (8) in the disc (1) aligns with a rotating center of the motor hub of the disc device.

WO 01/52247 A1

162162