

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
1 December 2005 (01.12.2005)

PCT

(10) International Publication Number
WO 2005/114023 A2

(51) International Patent Classification⁷: **F16L 17/00**

(21) International Application Number:
PCT/US2005/016162

(22) International Filing Date: 10 May 2005 (10.05.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/571,596 14 May 2004 (14.05.2004) US

(71) Applicant (for all designated States except US): **VIC-
TAULIC COMPANY OF AMERICA** [US/US]; 4901
Kesslersville Road, Easton, PA 18040 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GIBB, John**
[CA/CA]; 24 Coburn Crescent, Beeton, Ontario L0G
1A0 (CA). **DOLE, Douglas, R.** [US/US]; 9 Minsi Road,
Whitehouse Station, NJ 08889 (US). **PIGOTT, Michael,**
S. [US/US]; 3901 Village Lane, Roswell, GA 30075 (US).


(74) Agent: **CHIONCHIO, John, A.**; Synnestvedt & Lechner
LLP, 2600 Aramark Tower, 1101 Market Street, Philadel-
phia, PA 19107-2950 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ,
OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL,
SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DEFORMABLE MECHANICAL PIPE COUPLING

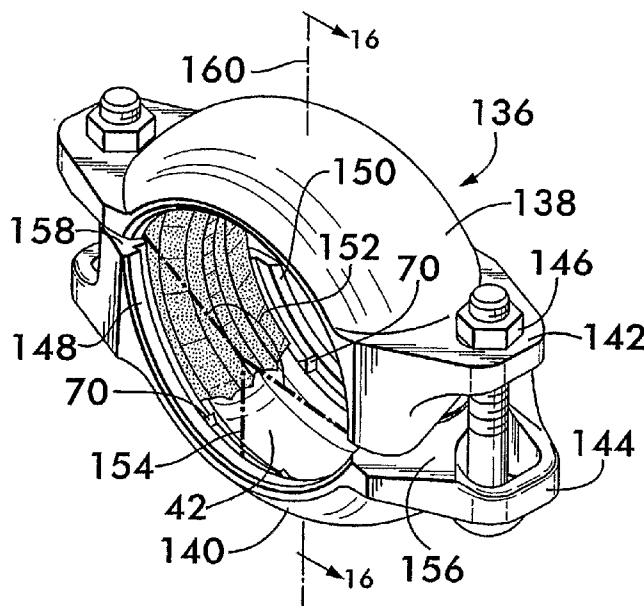

(57) Abstract: A deformable mechanical pipe coupling is disclosed. The coupling has a plurality of interconnectable segments that straddle the ends of pipe elements to be joined. The segments have arcuate surfaces that engage outer surfaces of the pipe elements. The outer surfaces subtend an angle of less than 180° and have radii of curvature greater than the radii of curvature of the pipe element outer surfaces. The segments have adjustably tightenable connection members for connecting the segments to one another. When the connection members are tightened, the arcuate surfaces deform and conform to the radius of curvature of the outer surface of the pipe elements.

WO 2005/114023 A2



Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

Published:

— *without international search report and to be republished
upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.