

FIG. 1

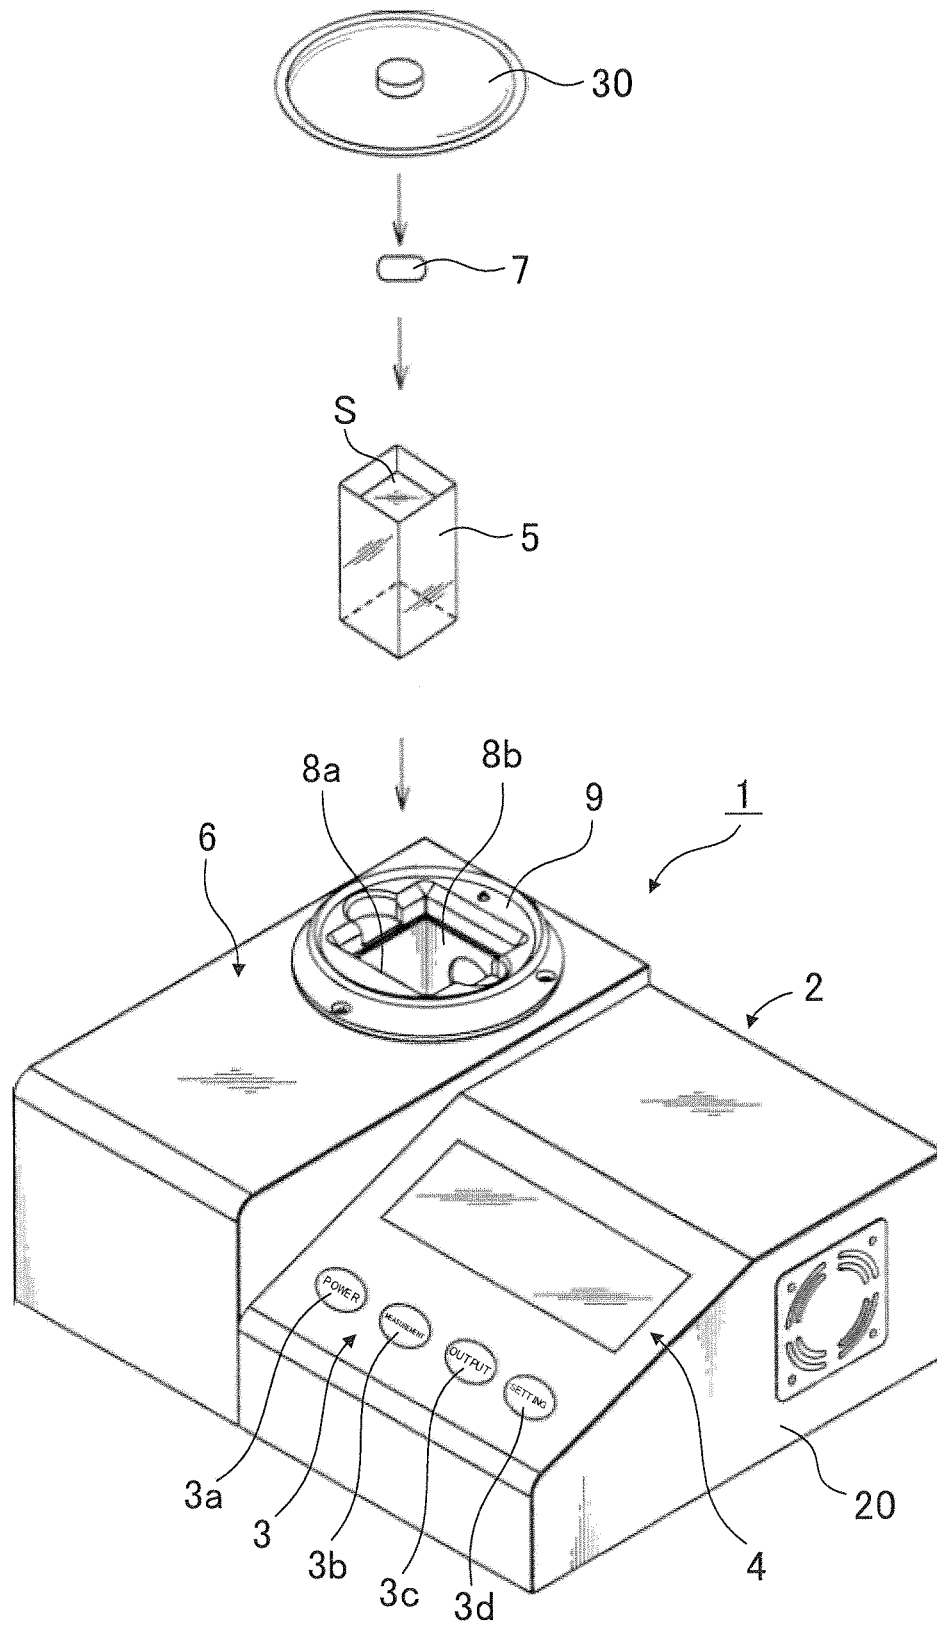


FIG. 2

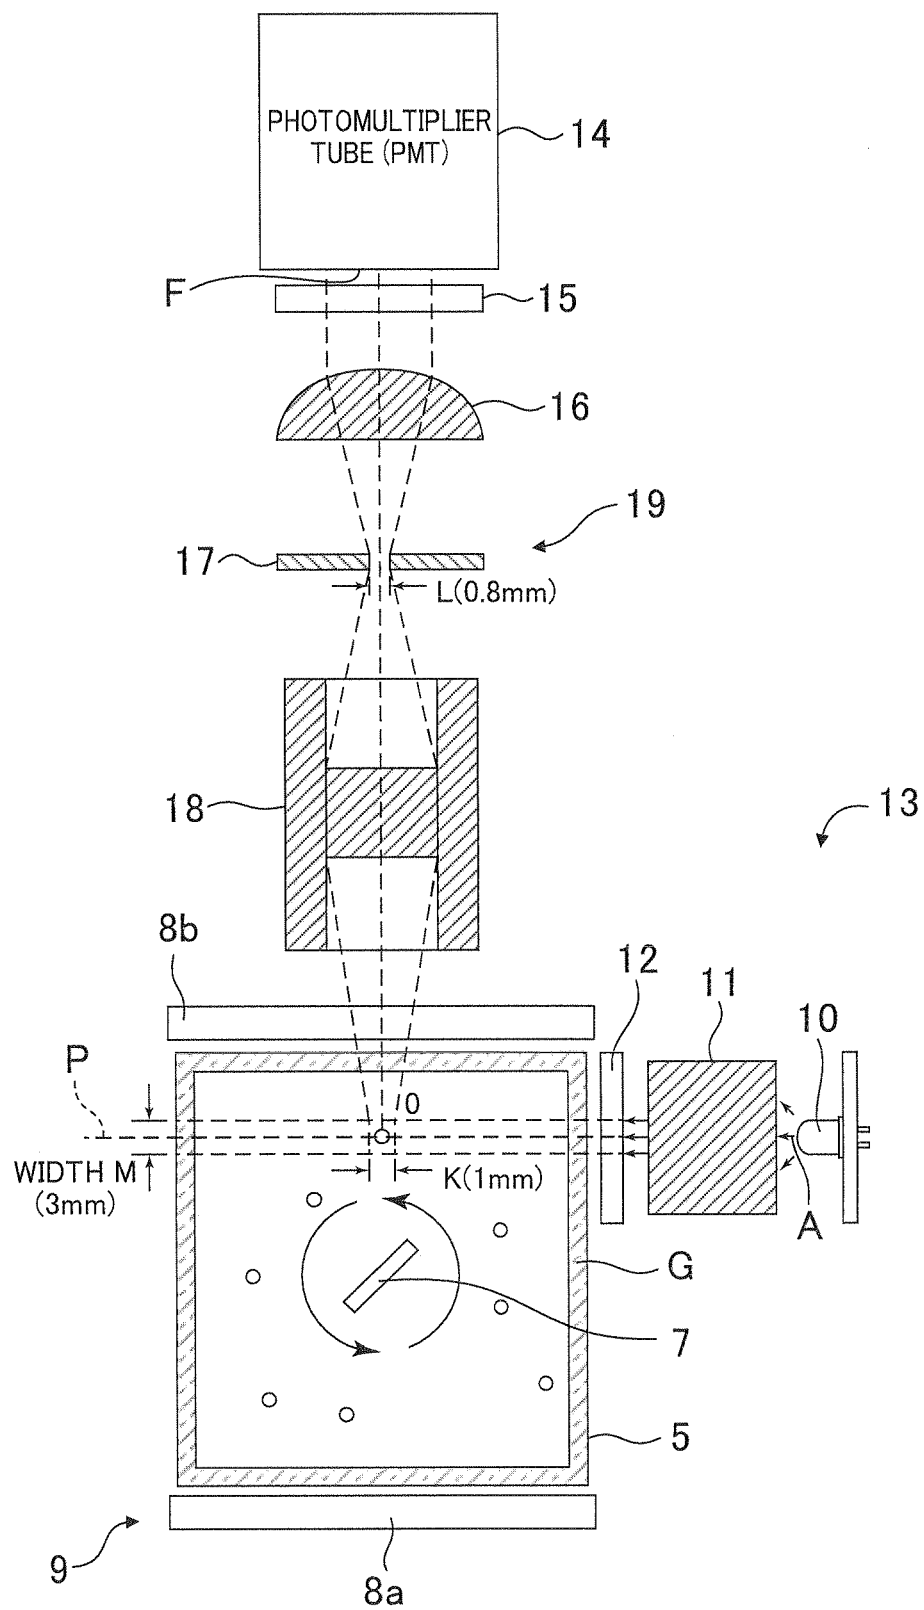


FIG. 3

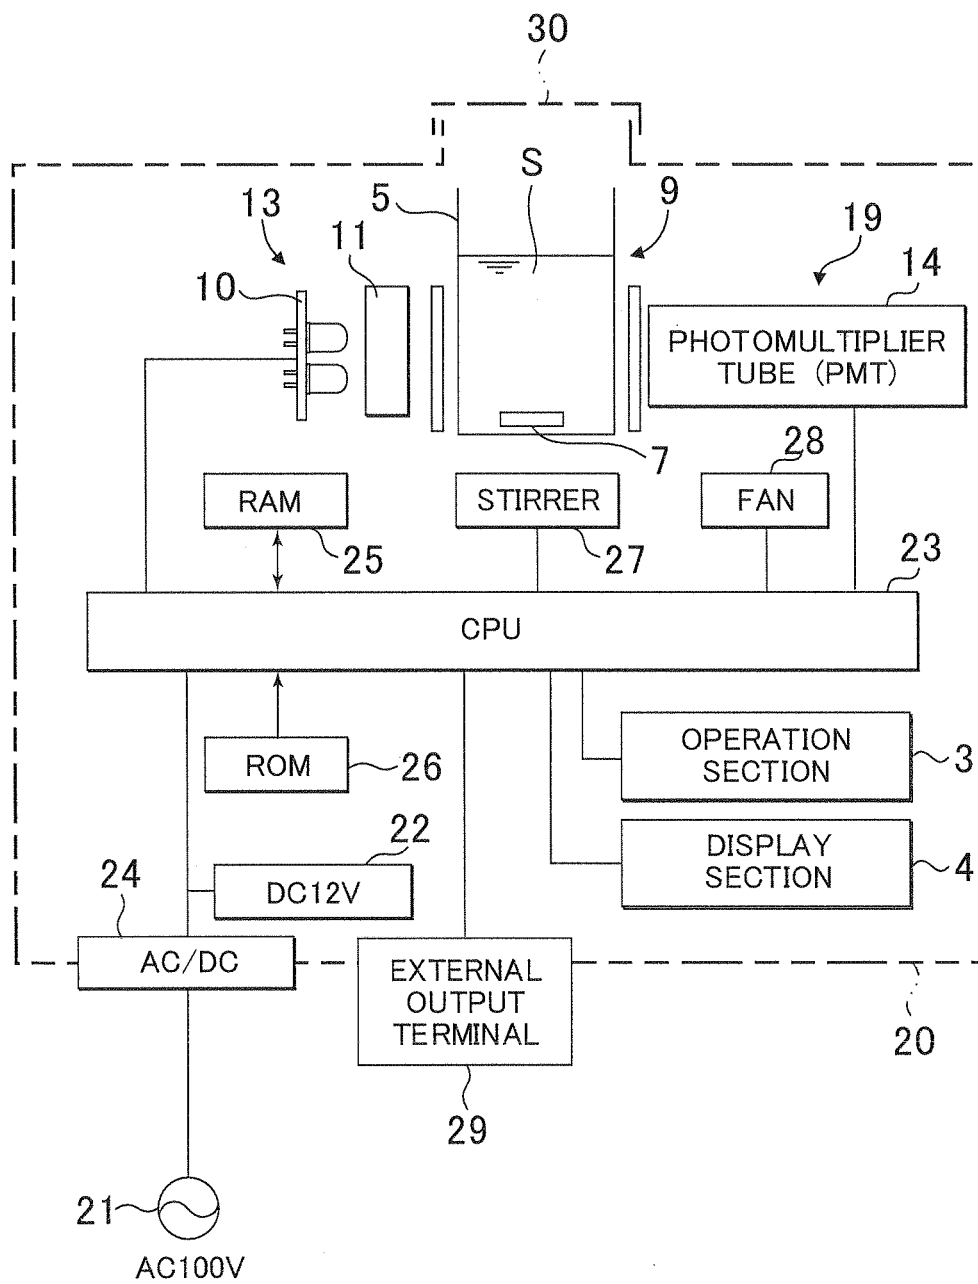


FIG. 4

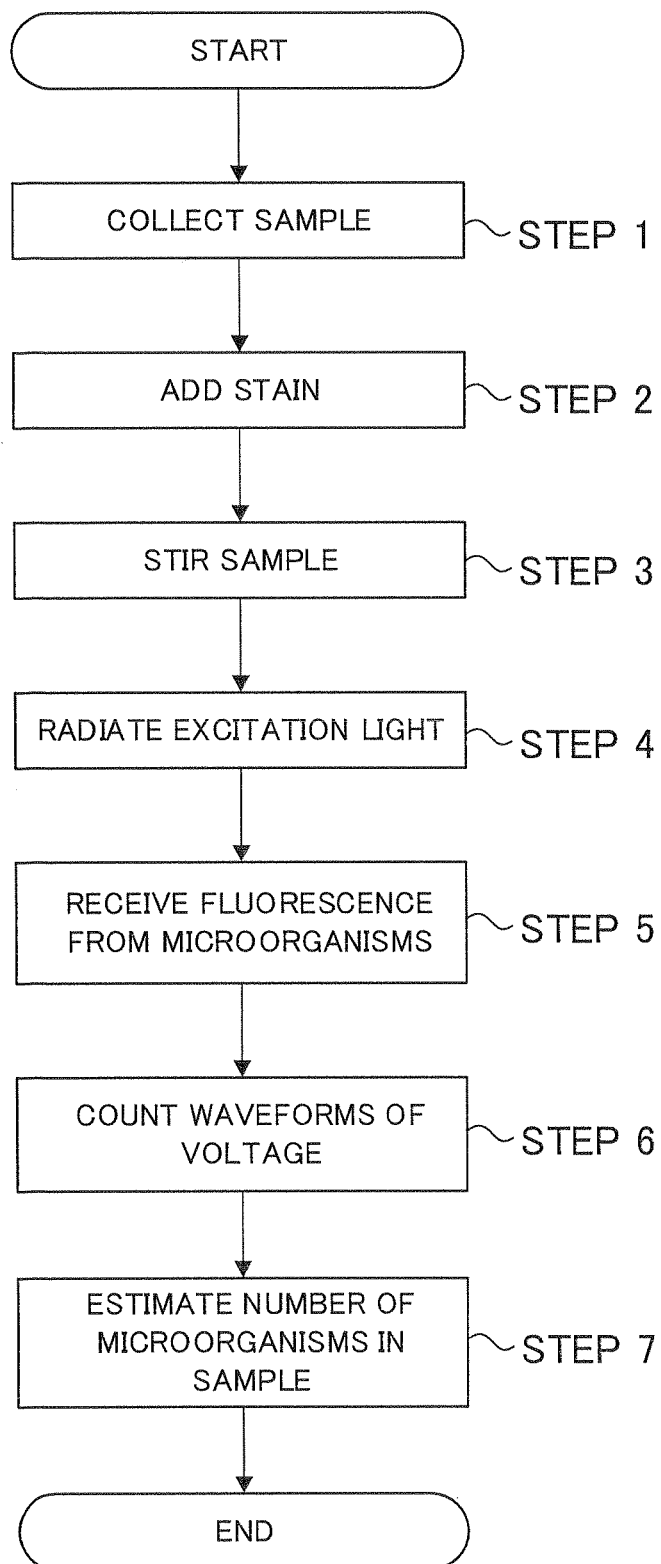


FIG. 5

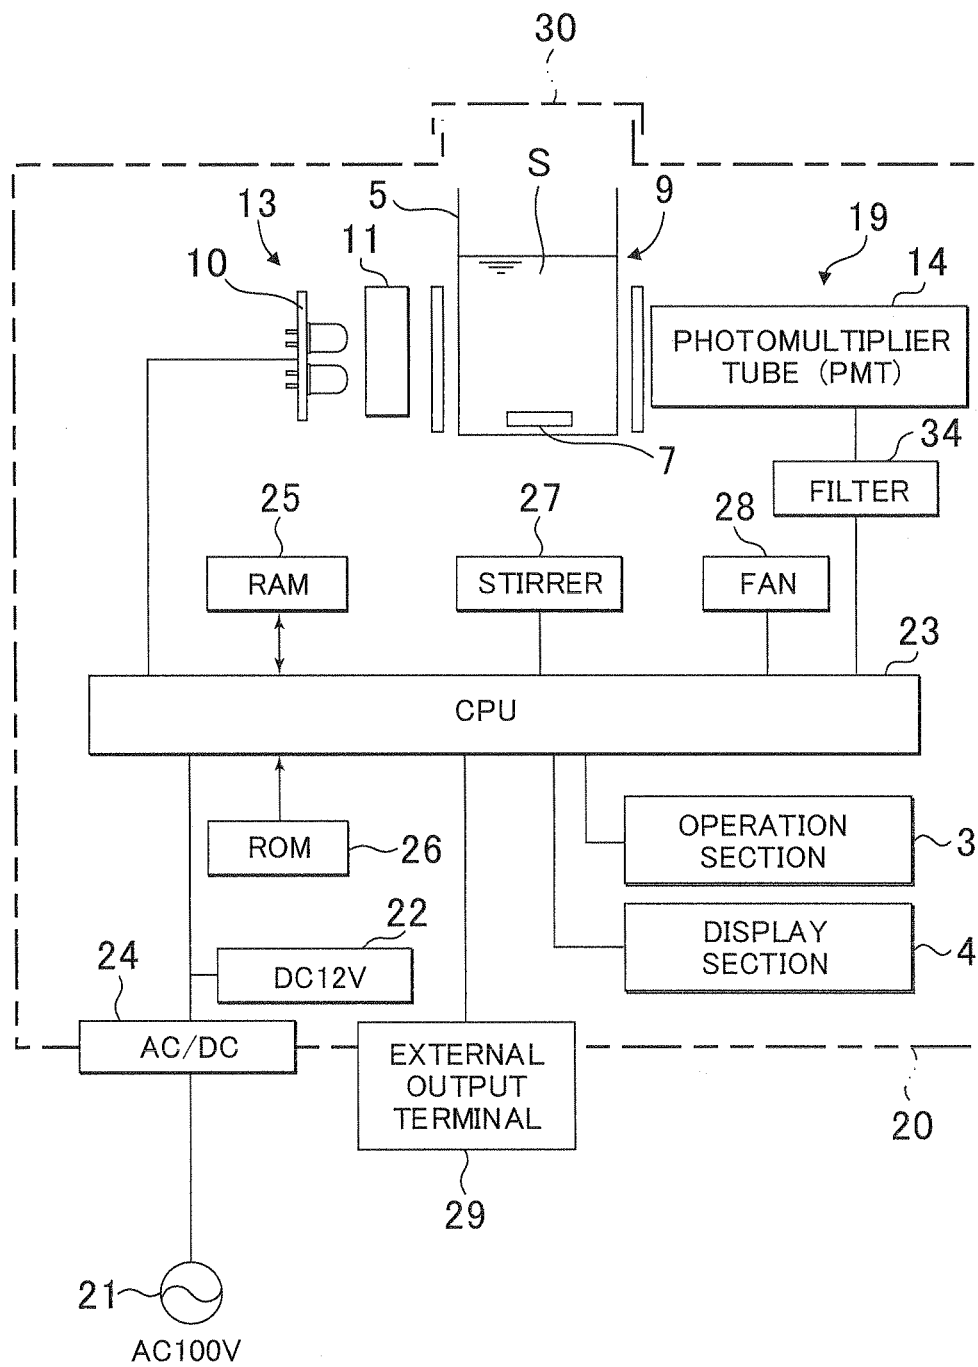


FIG. 6

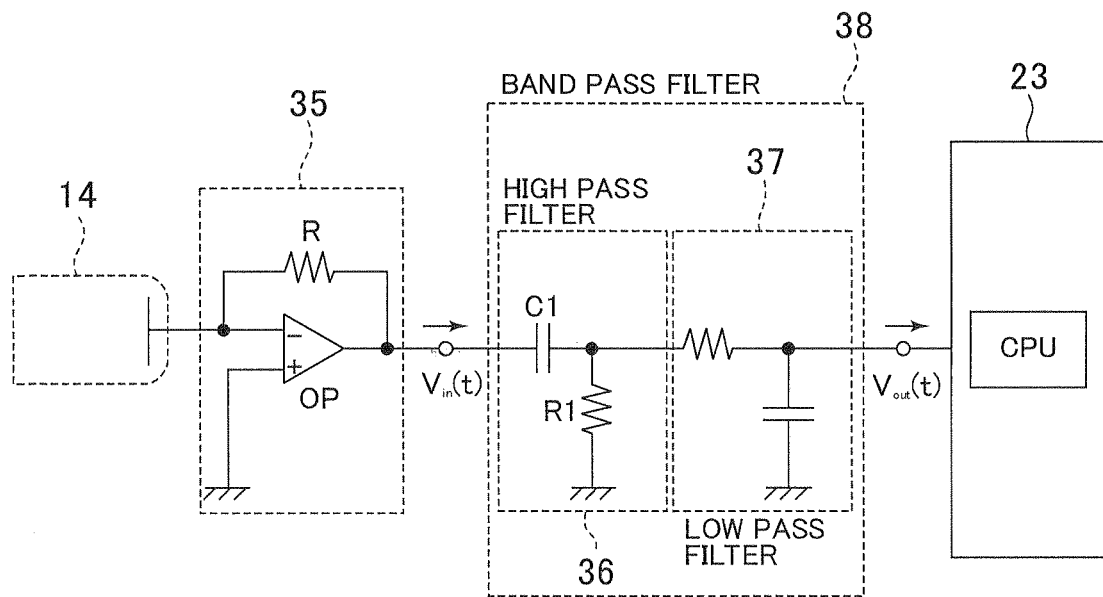


FIG. 7

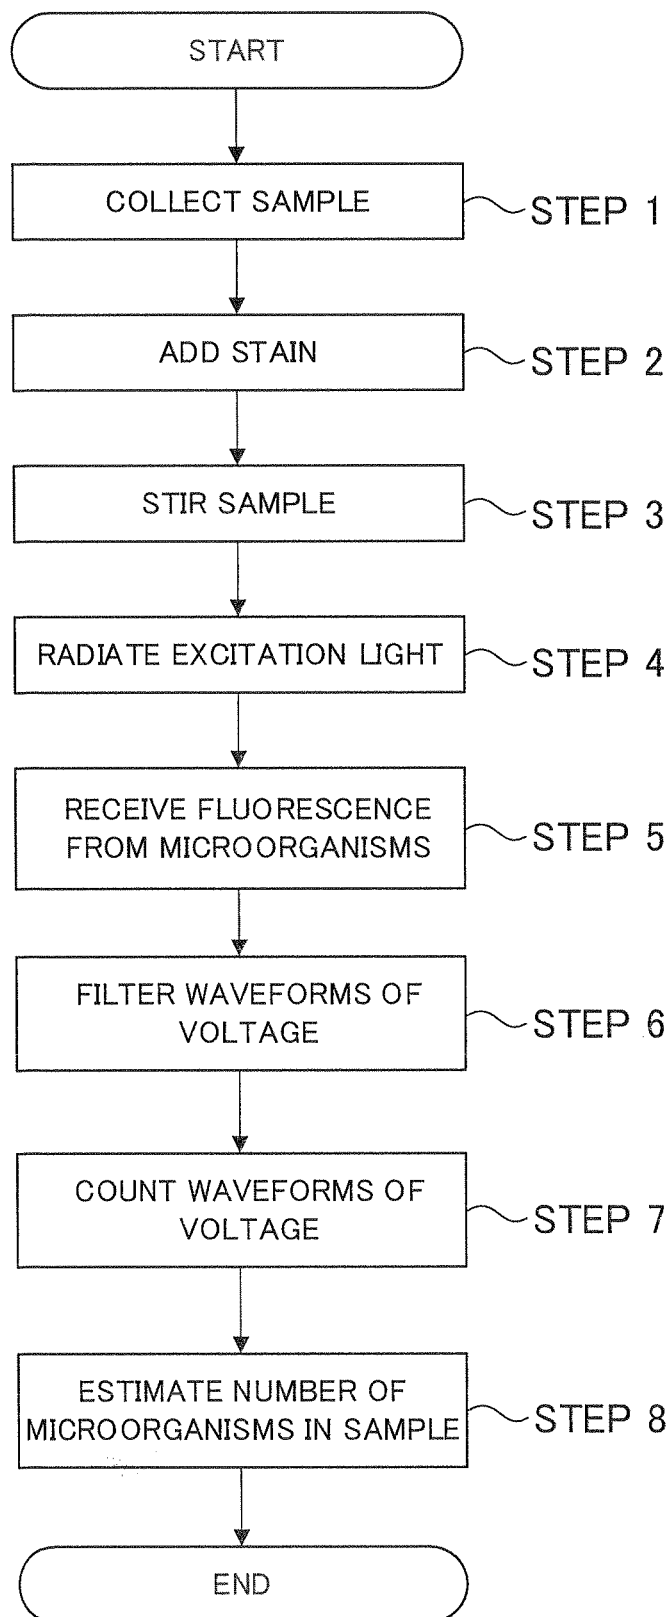


FIG. 8A

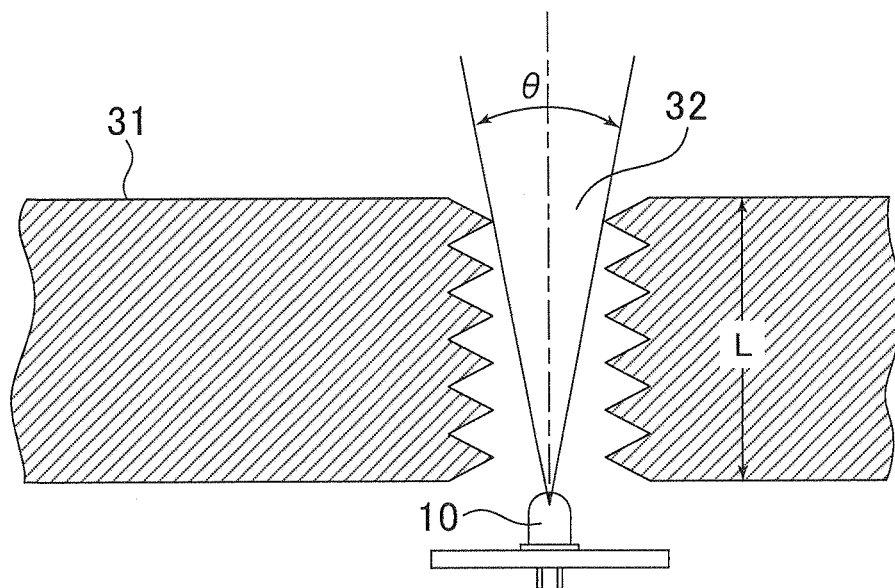


FIG. 8B

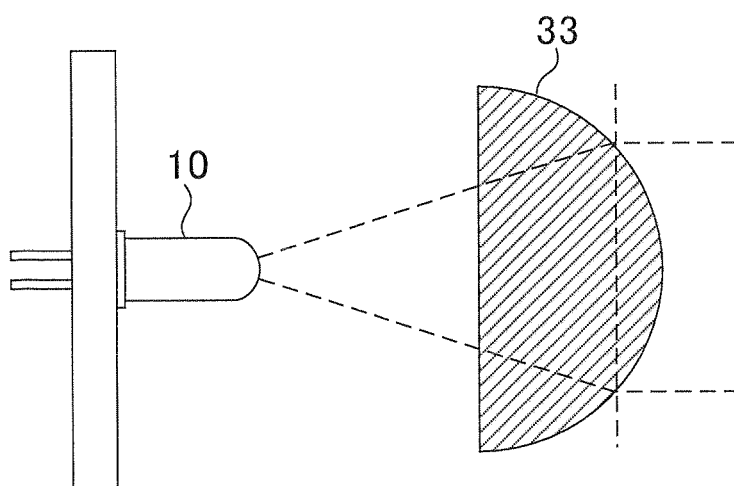


FIG. 9A

NO SLIT

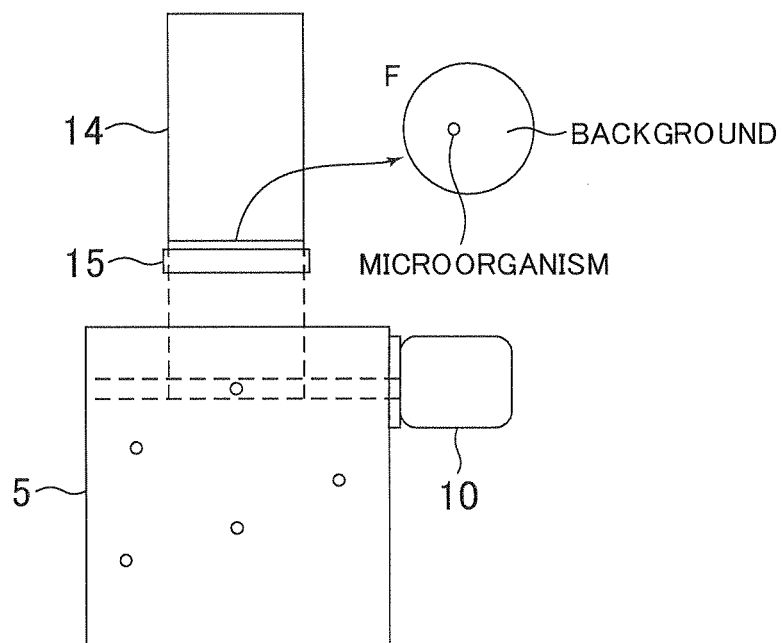


FIG. 9B

SLIT PROVIDED

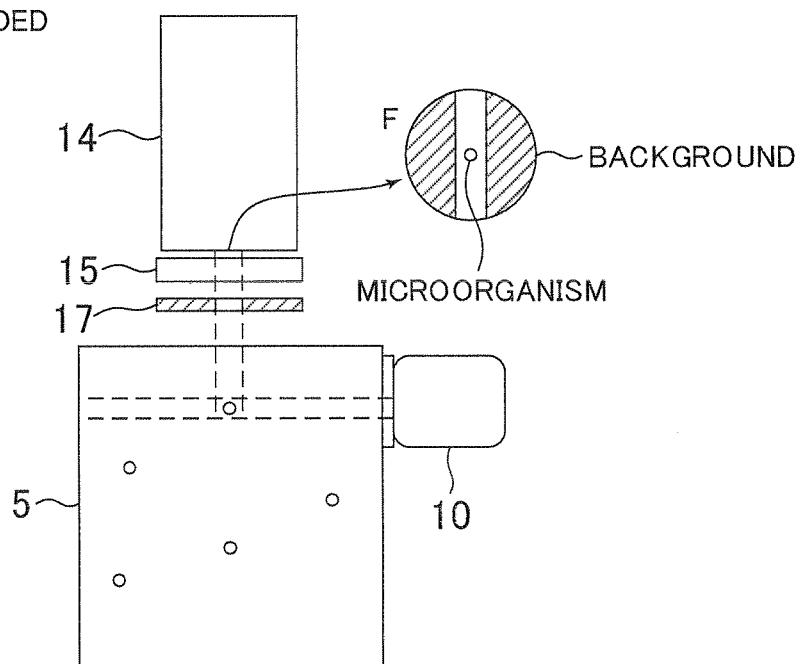


FIG. 10A

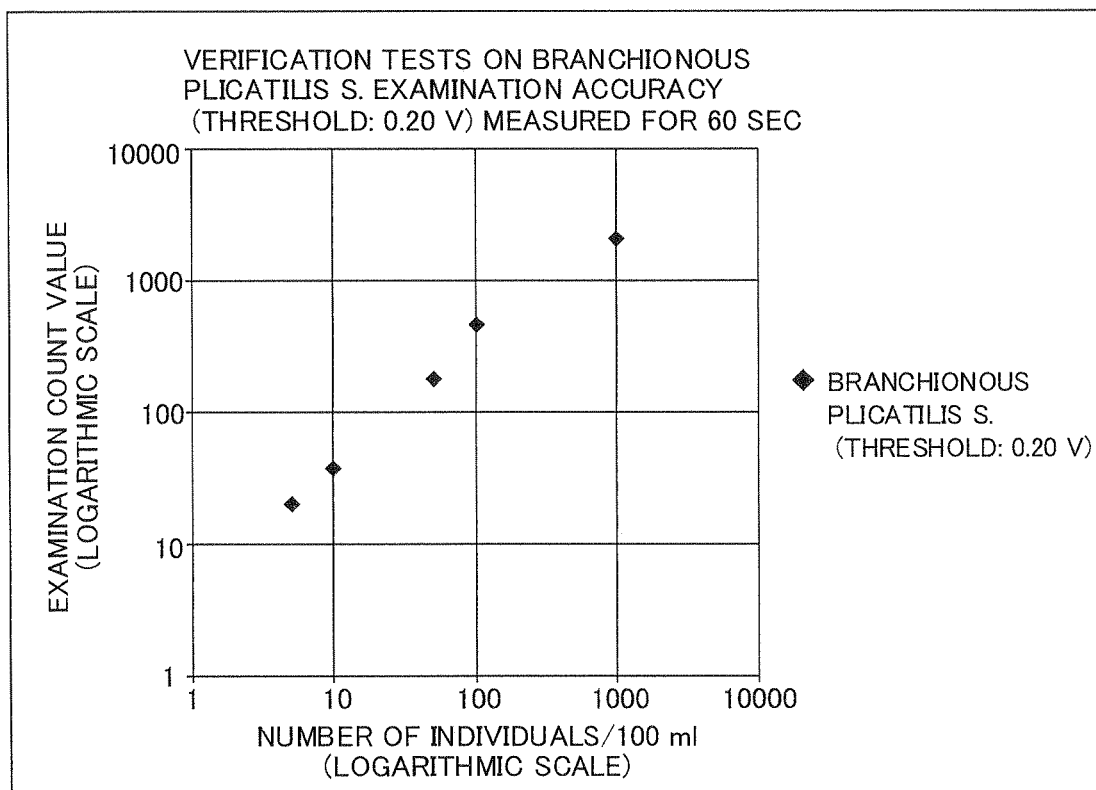


FIG. 10B

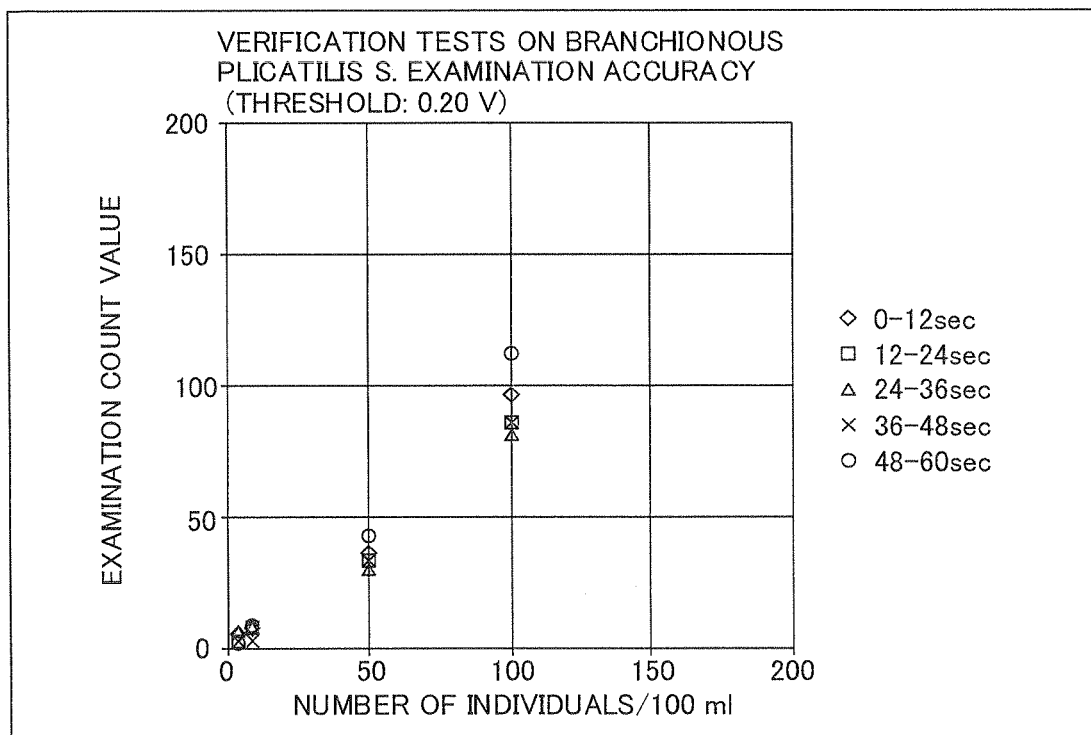


FIG. 11A

[BULK SLIT TYPE]LIVE/DEAD TEST
 STIRRER: APPROXIMATELY 360 rpm, CONTROL VOLTAGE: 0.680 V, STAINING TIME: 30 MINUTES

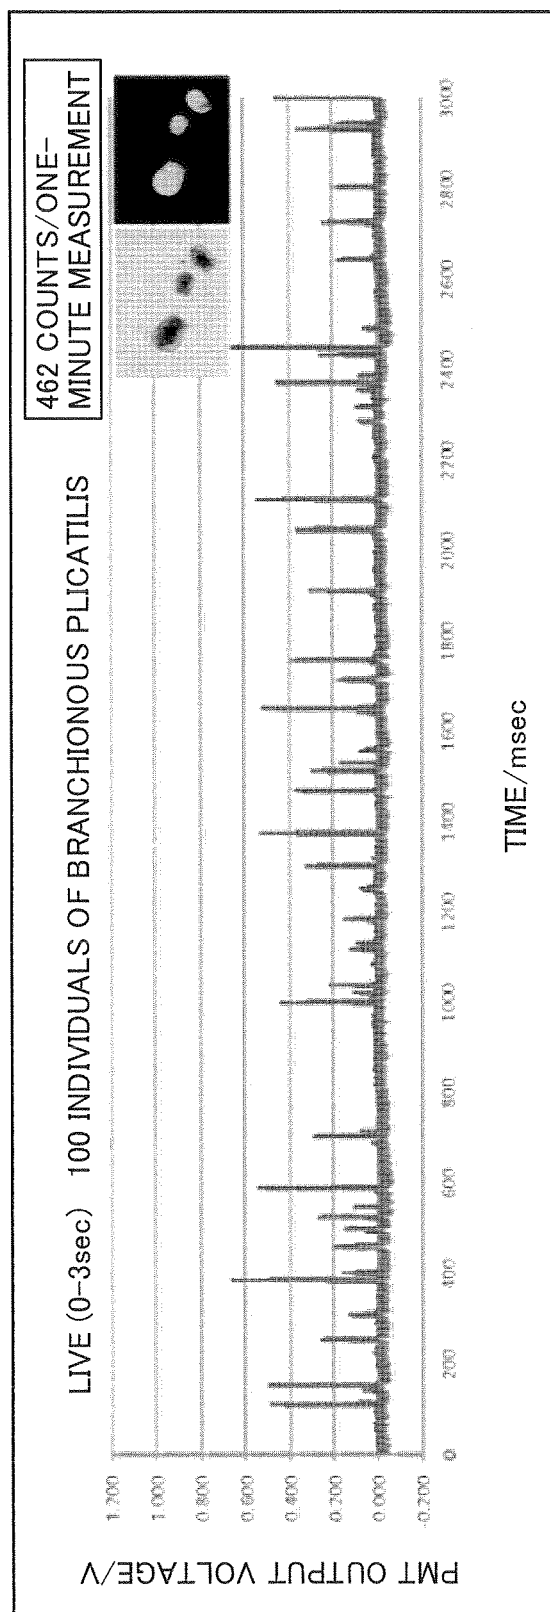


FIG. 11B

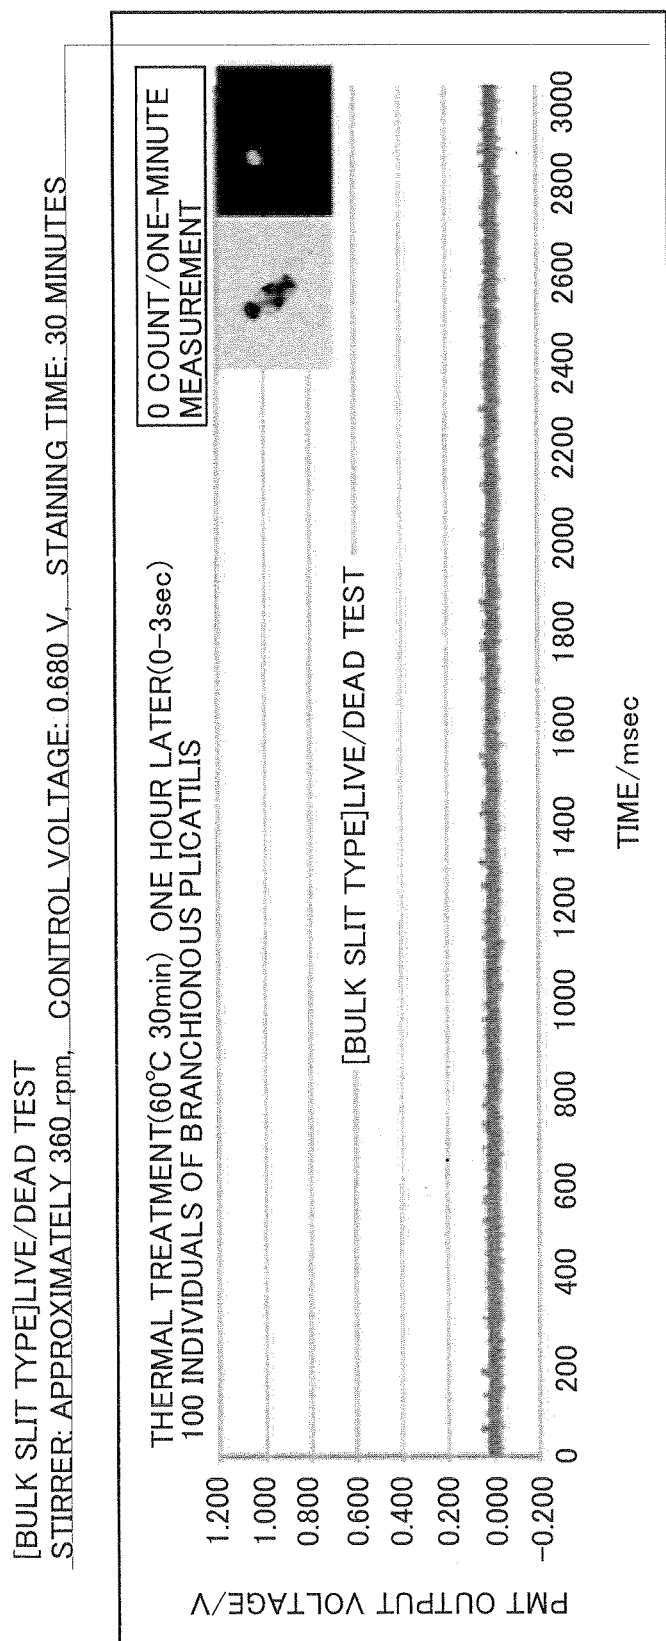


FIG. 11C

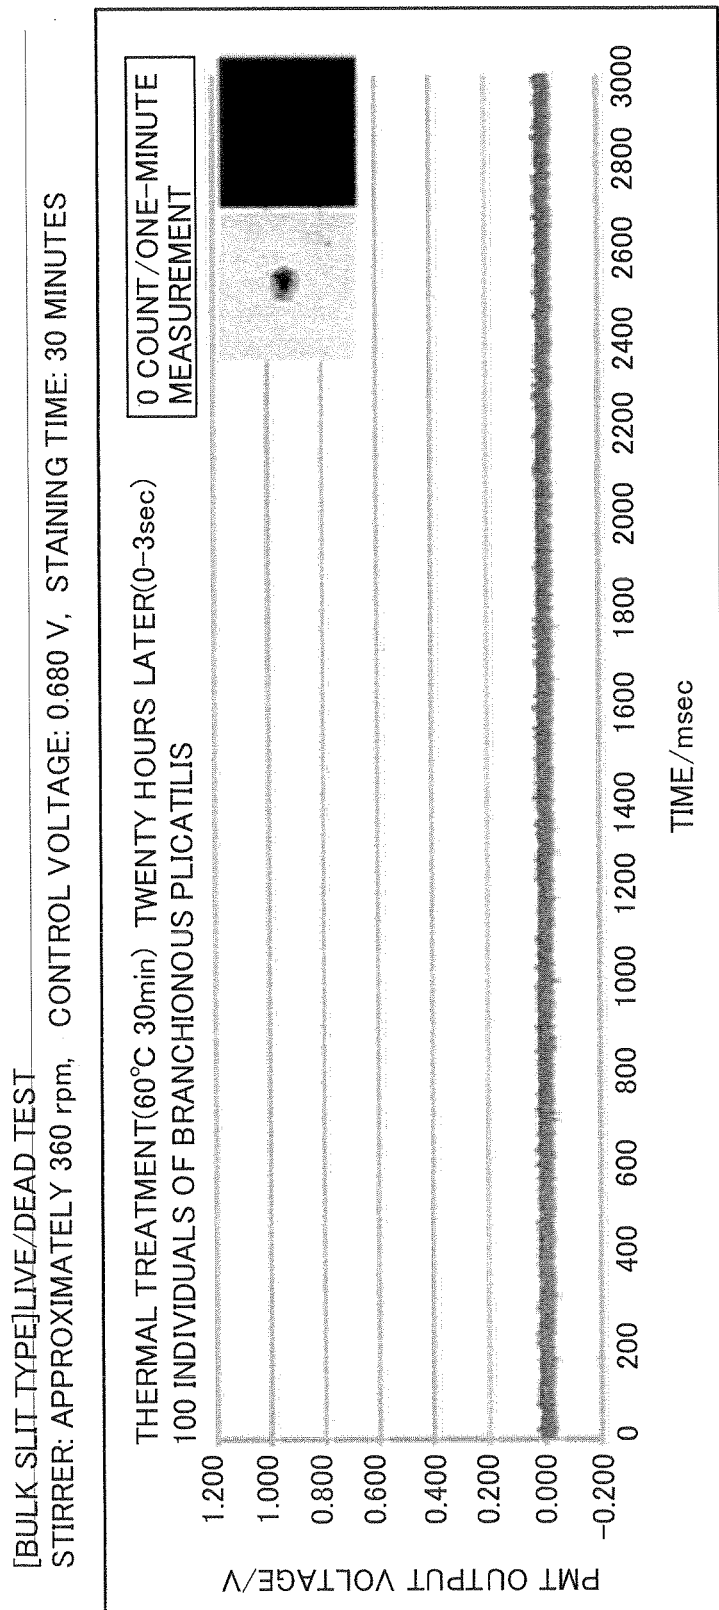


FIG. 11D

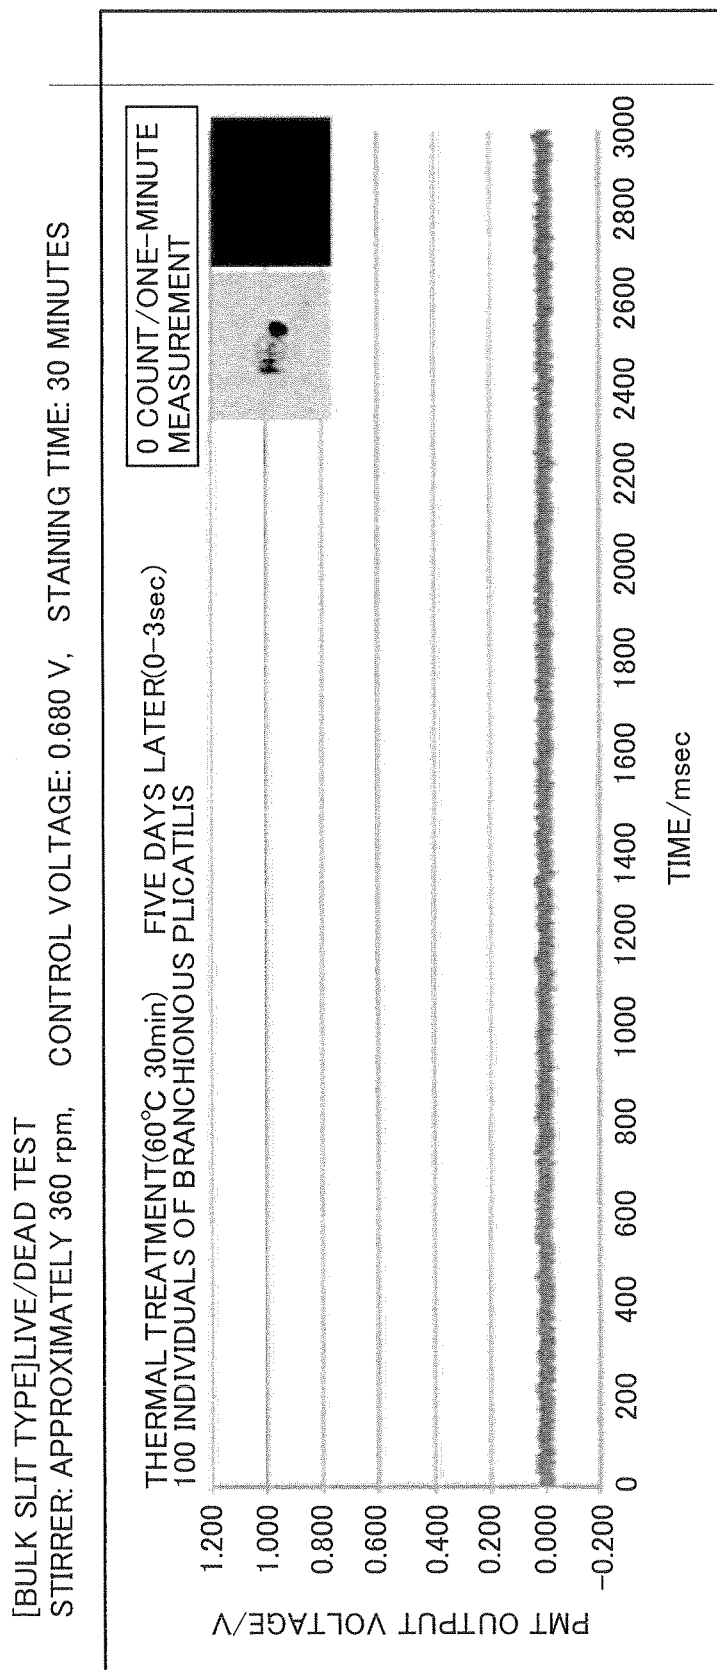


FIG. 12A

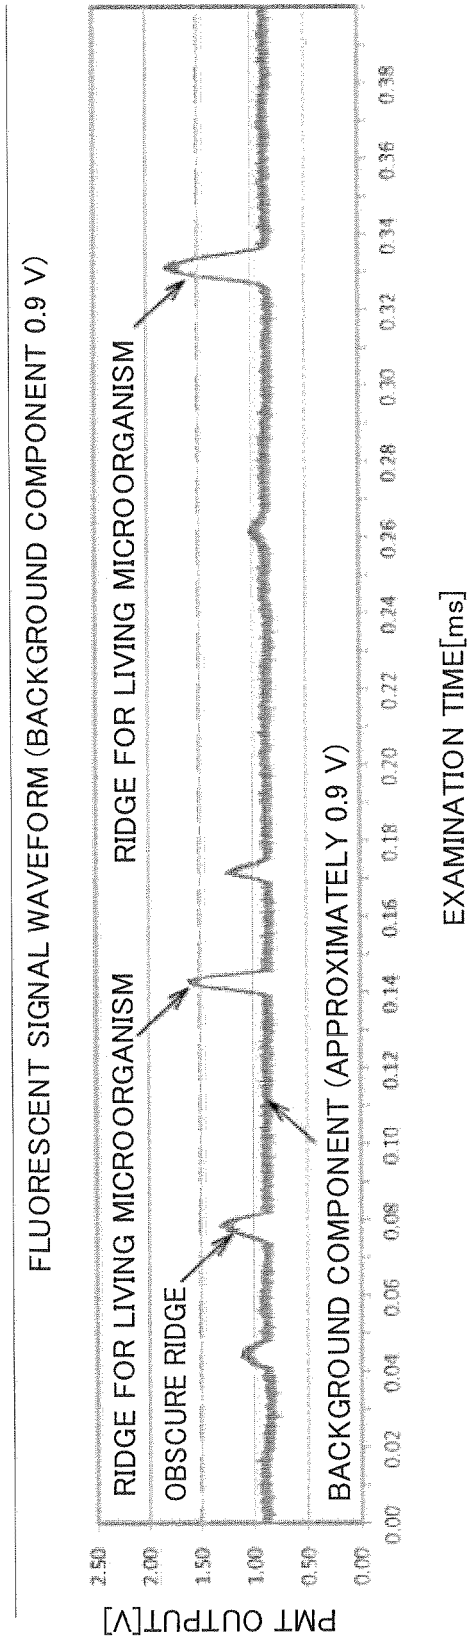


FIG. 12B

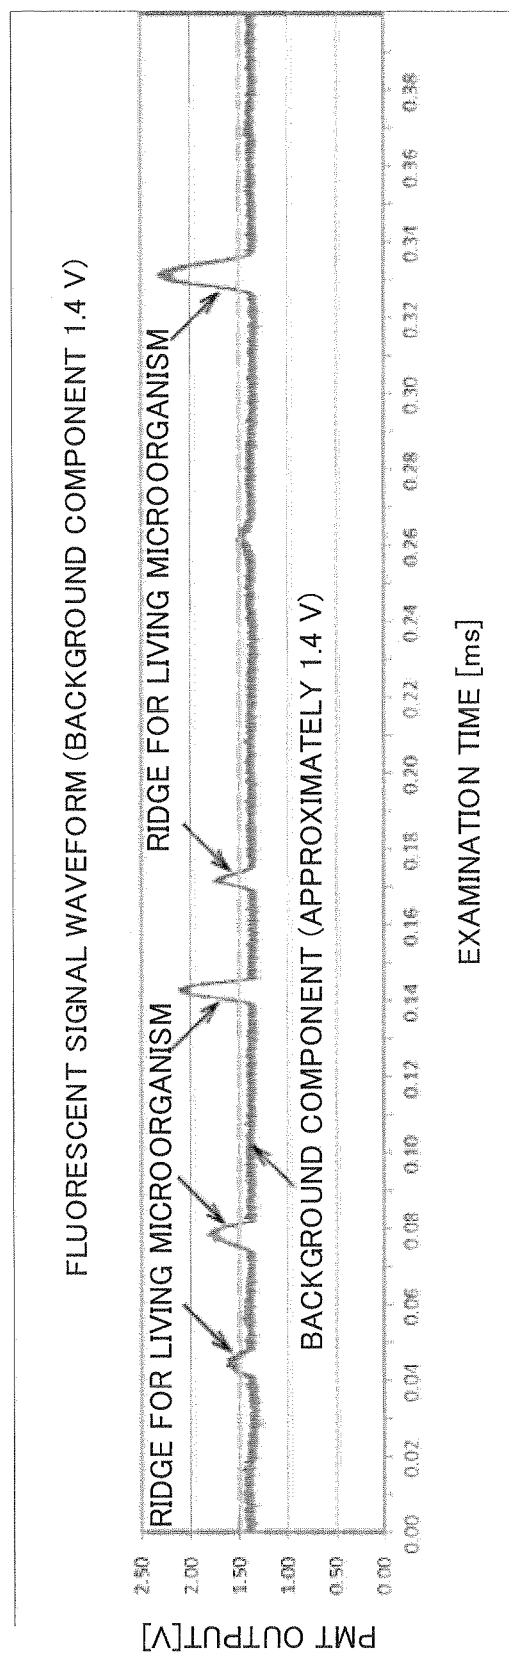


FIG. 12C

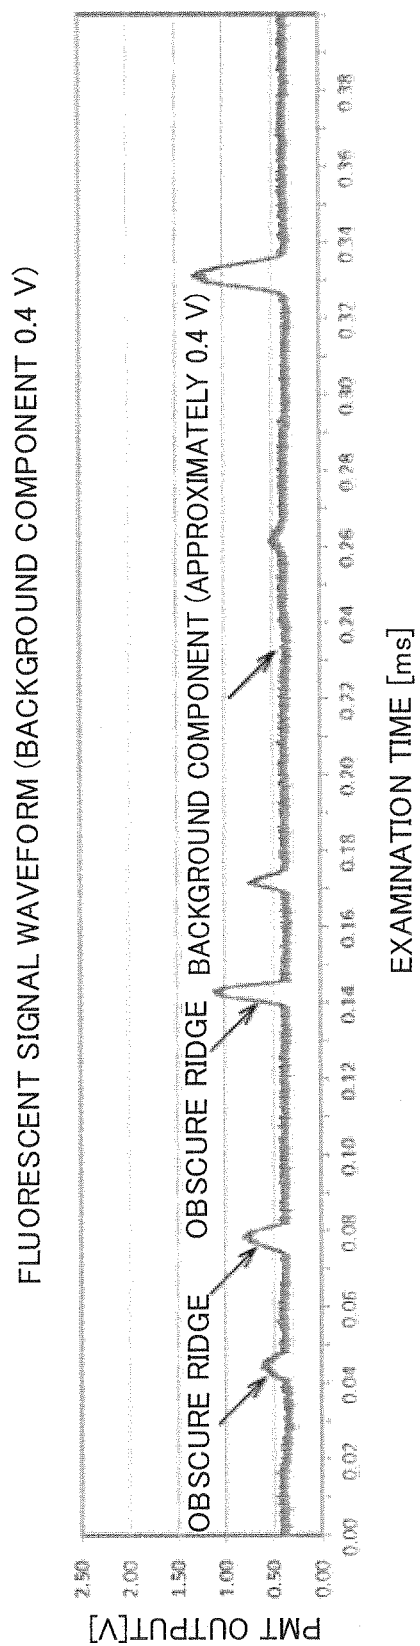


FIG. 13A

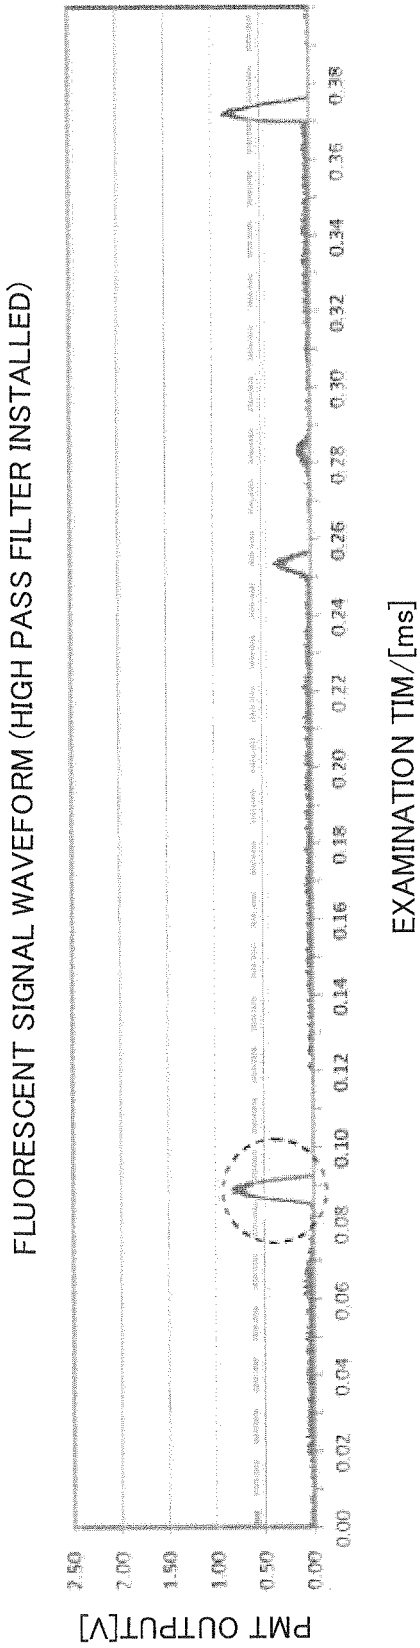


FIG. 13B

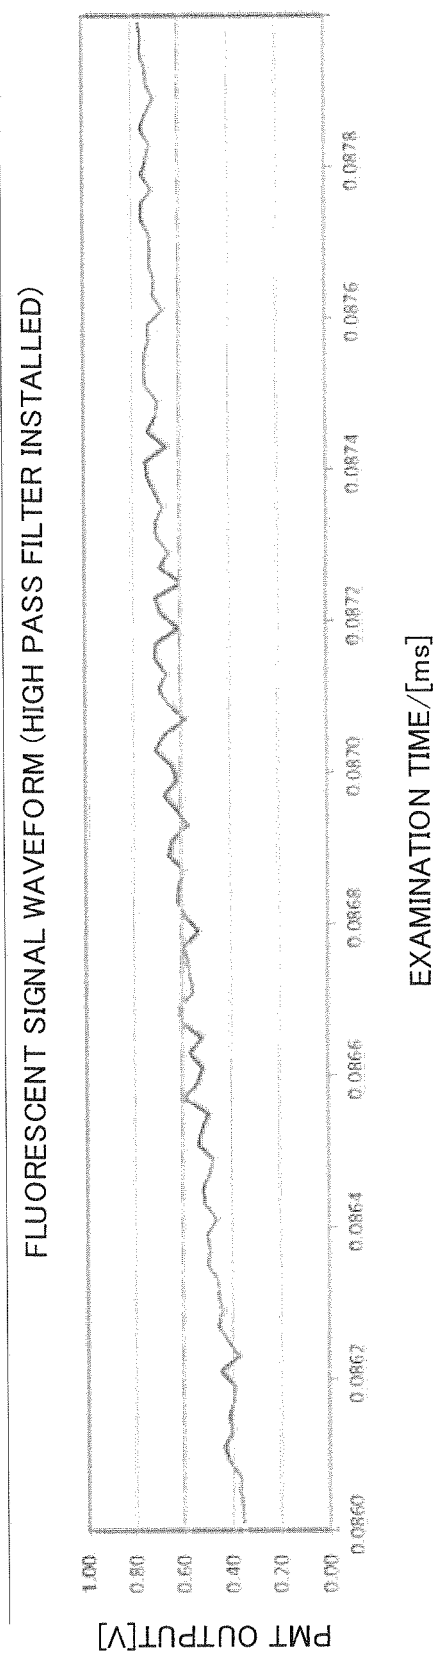


FIG. 13C

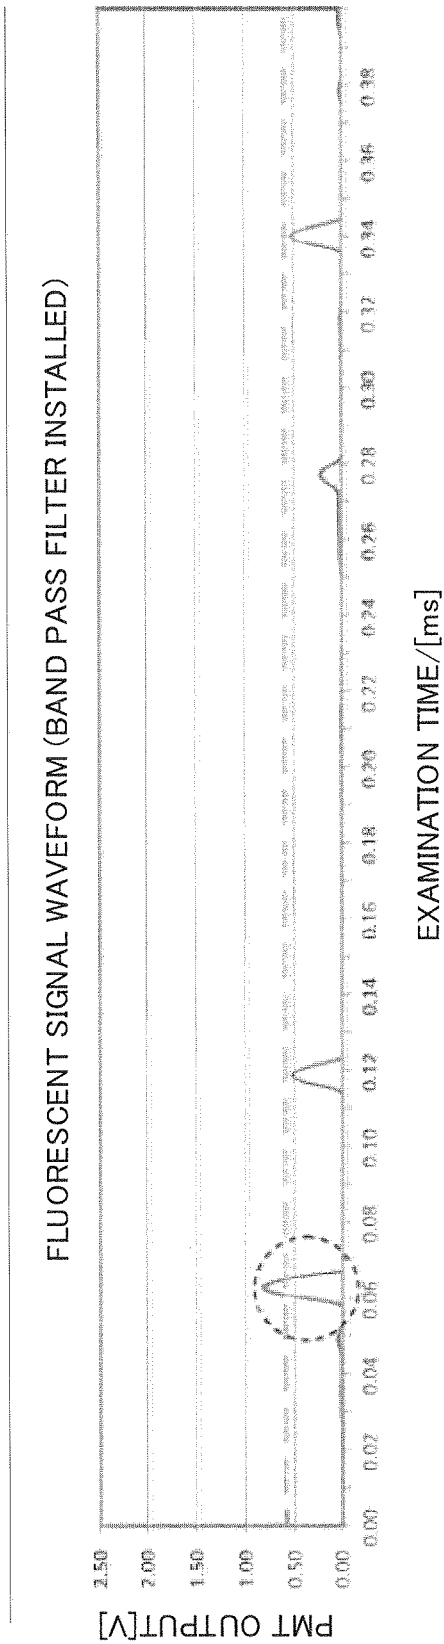


FIG. 13D

