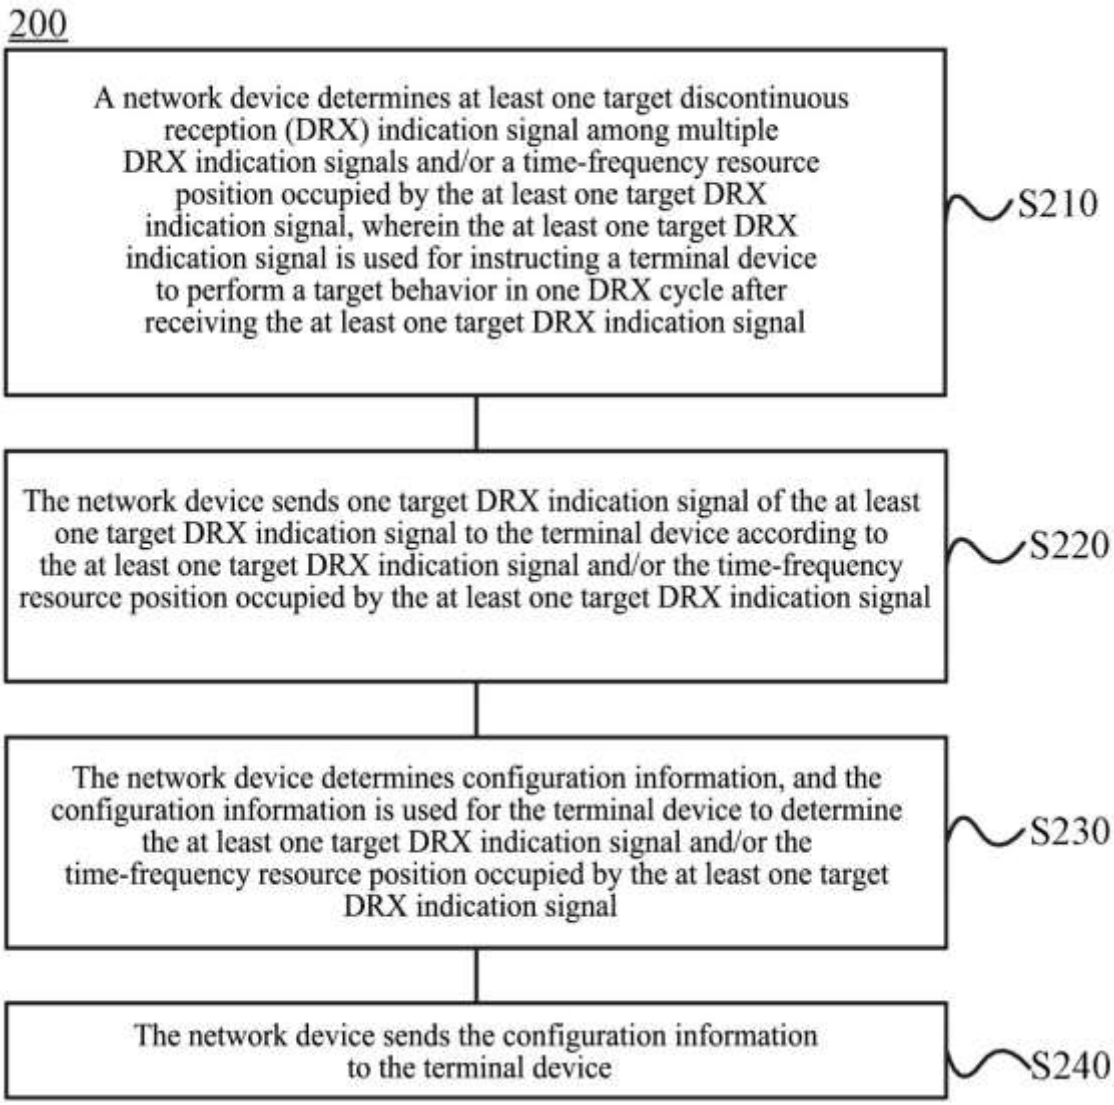
200
A network device determines at least one target discontinuous reception (DRX) indication signal among multiple DRX indication signals and/or a time-frequency resource position occupied by the at least one target DRX indication signal, wherein the at least one target DRX indication signal is used for instructing a terminal device to perform a target behavior in one DRX cycle after receiving the at least one target DRX indication signal
S210
The network device sends one target DRX indication signal of the at least one target DRX indication signal to the terminal device according to the at least one target DRX indication signal and/or the time-frequency resource position occupied by the at least one target DRX indication signal
S220
The network device determines configuration information, and the configuration information is used for the terminal device to determine the at least one target DRX indication signal and/or the time-frequency resource position occupied by the at least one target DRX indication signal
S230
The network device sends the configuration information to the terminal device
S240

FIG. 3

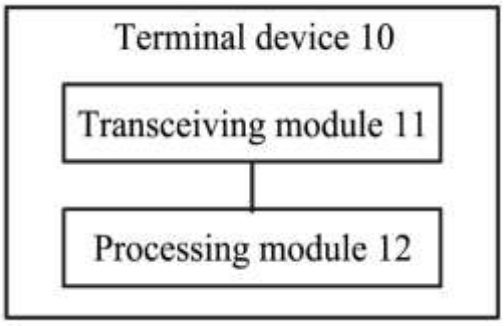
Terminal device 10
Transceiving module 11
Processing module 12

FIG. 4