




- (51) **International Patent Classification:**
B65B 31/02 (2006.01)
- (21) **International Application Number:**
PCT/IB2011/055606
- (22) **International Filing Date:**
12 December 2011 (12.12.2011)
- (25) **Filing Language:** Italian
- (26) **Publication Language:** English
- (30) **Priority Data:**
TV2010A000164 13 December 2010 (13.12.2010) IT
- (71) **Applicants** (for all designated States except US): **BLU PACK DI SCOLARO MAURO** [IT/IT]; Via Pio X, 1, I-20063 Cernusco Sul Naviglio (IT). **EXTRU SA** [ES/ES]; Poligono Cerradoa S/N, 31840 Uharte-Arakil (Navarra) (ES).
- (72) **Inventor; and**
- (75) **Inventor/Applicant** (for US only): **SCOLARO, Mauro** [IT/IT]; Via Pio X, 1, I-20063 Cernusco Sul Naviglio (IT).
- (74) **Agent:** **MODIANO, Micaela**; Modiano & Partners, Via Meravigli, 16, I-20123 Milano (IT).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) **Title:** DEVICE FOR VACUUM PACKAGING, PARTICULARLY OF FOOD PRODUCTS

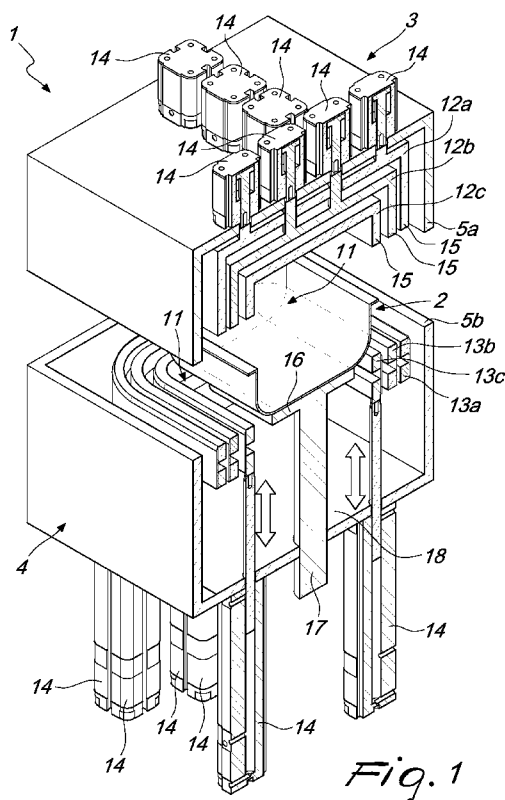

(57) **Abstract:** A packaging device, particularly for packaging trays containing food products or technical materials in a controlled atmosphere and by means of a film of plastic material. The device comprises an upper chamber and a lower chamber, which can be fastened by mutually superimposing them and are each provided internally with a plurality of heat-sealing and/or cutting and/or die-cutting means arranged concentrically. The lower chamber is provided centrally with a plurality of supporting means for a tray.



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG). **Published:**

— *with international search report (Art. 21(3))*