



(51) International Patent Classification:

B64C 13/12 (2006.01) B64C 13/22 (2006.01)
B64D 45/00 (2006.01) B64C 13/20 (2006.01)
B64C 13/18 (2006.01)

(21) International Application Number:

PCT/EP2019/086279

(22) International Filing Date:

19 December 2019 (19.12.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1873405	19 December 2018 (19.12.2018)	FR
1901190	06 February 2019 (06.02.2019)	FR
1901191	06 February 2019 (06.02.2019)	FR
1901254	08 February 2019 (08.02.2019)	FR
1901350	11 February 2019 (11.02.2019)	FR

(71) Applicants: **SAFRAN ELECTRONICS & DEFENSE** [FR/FR]; 18-20 Quai du Point du Jour, 92100 BOULOGNE-BILLANCOURT (FR). **ST ENGINEERING AEROSPACE LTD** [SG/SG]; 540 Airport Road, Paya Lebar, SINGAPOUR 539938 (SG).

(72) Inventors: **WALTER, Eric**; c/o SAFRAN ELECTRONICS & DEFENSE, 18-20 Quai du Point du Jour, 92100 BOULOGNE-BILLANCOURT (FR). **FOUGERES, Loïc**; c/o SAFRAN ELECTRONICS & DEFENSE, 18-20 Quai du Point du Jour, 92100 BOULOGNE-BILLANCOURT (FR). **DIAZ, Mikael**; c/o SAFRAN ELECTRONICS & DEFENSE, 18-20 Quai du Point du Jour, 92100 BOULOGNE-BILLANCOURT (FR). **TRANIE, Philippe**; c/o SAFRAN ELECTRONICS & DEFENSE, 18-20 Quai du Point du Jour, 92100 BOULOGNE-BILLANCOURT (FR). **KWEE CHYE, Ng**; c/o ST Engineering Aerospace Ltd, 540 Airport Road, Paya Lebar, SINGAPOUR (FR). **SIEW LIONG, Tay**; c/o ST

(54) Title: SYSTEM FOR CONFIGURING AN AIRCRAFT IN A SINGLE-PILOT MODE OR A TWO-PILOT MODE

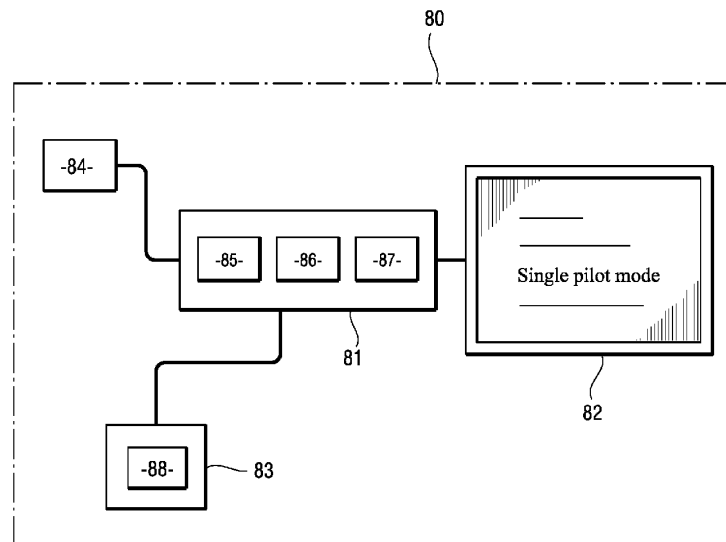


Fig. 5

(57) Abstract: A configuration system (80) arranged to configure an aircraft in a single-pilot mode and a two-pilot mode, comprising: - acquisition means (84) and authentication means (83) arranged to acquire and authenticate a configuration order that defines the selected mode and controls the configuration system (80) to configure the aircraft in the selected mode; - first activation means (85) arranged to activate equipment dedicated to piloting by a single-pilot on board when the aircraft is configured in single-pilot mode, and to deactivate dedicated equipment when the aircraft is configured in two-pilot mode; - verification means (87) arranged to, when the aircraft is configured in the single-pilot mode, verify that single-pilot flight conditions are met and inform the sole pilot on board and a ground station of the results of these checks.

[Continued on next page]

Engineering Aerospace Ltd, 540 Airport Road, Paya Lebar,
SINGAPOUR 539938 (SG).

(74) **Agent:** LAVAUD, Thomas et al.; c/o CABINET
BOETTCHER, 16 rue Médéric, 75017 PARIS (FR).

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))