



(51) International Patent Classification:

A61M 5/46 (2006.01) A61B 5/103 (2006.01)
A61B 5/02 (2006.01)

(21) International Application Number:

PCT/SG2015/050480

(22) International Filing Date:

1 December 2015 (01.12.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10201408029P 2 December 2014 (02.12.2014) SG

(71) Applicants: AGENCY FOR SCIENCE, TECHNOLOGY AND RESEARCH [SG/SG]; 1 Fusionopolis Way, #20-10 Connexis, Singapore 138632 (SG). SINGAPORE HEALTH SERVICES PTE LTD [SG/SG]; 31 Third Hospital Avenue, #03-03, Bowyer Block C, Singapore 168753 (SG).

(72) Inventors: CHENG, Ming-yuan; c/o Industry Development, Institute of Microelectronics, 11 Science Park Road, Singapore Science Park 2, Singapore 117685 (SG). HE, Cairan; c/o Industry Development, Institute of Microelectronics, 11 Science Park Road, Singapore Science Park 2, Singapore 117685 (SG). TAN, Swee Kim; KK Women's and Children's Hospital, 100 Bukit Timah Road, Singapore 229899 (SG). BONG, Choon Looi; KK Women's and Children's Hospital, 100 Bukit Timah Road, Singapore 229899 (SG). HO, Chee Keong; c/o Industry Development, Institute of Microelectronics, 11 Science Park Road, Singapore Science Park 2, Singapore 117685 (SG). DAM-ALERIO, Ramona; c/o Industry Development, Institute of Microelectronics, 11 Science Park Road, Singapore Science Park 2, Singapore 117685 (SG). CHEN, Weiguo; c/o Industry Development, Institute of Microelectronics, 11 Science Park Road, Singapore Science Park 2, Singapore 117685 (SG). GU, Yuandong; c/o Industry Development, Institute of Microelectronics, 11 Science Park Road, Singapore Science Park 2, Singapore 117685 (SG).

[Continued on next page]

(54) Title: SENSOR PATCH AND SENSING DEVICE HAVING THE SAME

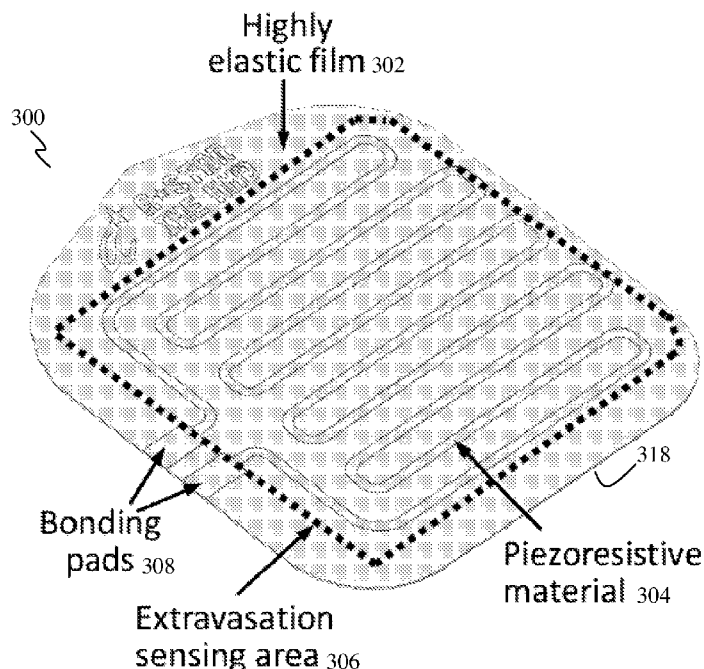


FIG. 3

(57) Abstract: According to embodiments of the present invention, a sensor patch for detecting extravasation is provided. The sensor patch includes an elastic film, and at least one sensing electrode disposed on the elastic film, wherein an electrical resistance of the at least one sensing electrode is changeable in response to a force acting on the at least one sensing electrode. According to further embodiments of the present invention, a sensing device is also provided.



(74) **Agent: VIERING, JENTSCHURA & PARTNER LLP;**
P.O. Box 1088, Rochor Post Office, Rochor Road, Singa-
pore 911833 (SG).

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))