

(51) International Patent Classification:
A62C 37/09 (2006.01)(21) International Application Number:
PCT/FI2012/050343(22) International Filing Date:
4 April 2012 (04.04.2012)

(25) Filing Language: Finnish

(26) Publication Language: English

(30) Priority Data:
20115336 8 April 2011 (08.04.2011) FI(71) Applicant (for all designated States except US): **MARIOFF CORPORATION OY** [FI/FI]; Virnatie 3, FI-01300 Vantaa (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HELASUO, Jarmo** [FI/FI]; Löylytie 12 A2, FI-02770 Espoo (FI). **MALINEN, Jarkko** [FI/FI]; Kukkakuja 5 B, FI-04430 Järvenpää (FI).(74) Agent: **HEINÄNEN OY**; Äyritie 8 D, FI-01510 Vantaa (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: SPRAY HEAD

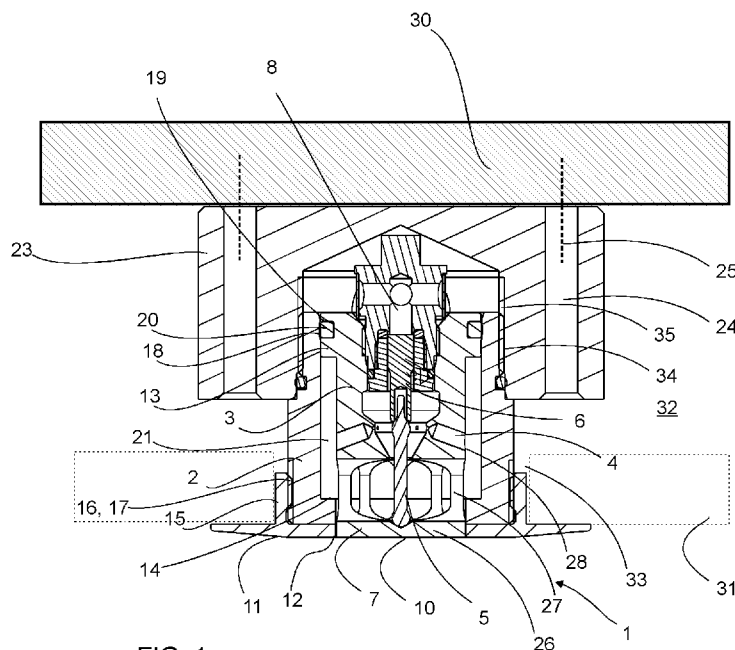


FIG. 1

(57) Abstract: A spray head (1), comprising a fastening body (2), a spray head body (3) with at least one nozzle (4) and a thermally activated triggering device (5), said spray head body (3) being arranged into fastening body (2), in its cylinder space (21) to be movable between two positions, the first position, in which spray head is in the inactive state, and the second position, in which the spray head body is extended out, said spray head body (3) being arranged to be movable through the effect of pressurized medium in relation to fastening body (2) from the first position to the second position. A retaining arrangement (18, 19, 20) has been arranged between spray head body (3) and fastening body (2), adapted to keep spray head body (3) in the first position, until the pressure of the medium exceeds a pre-set value.



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) **Date of publication of the international search report:**
23 May 2013