



- (51) **International Patent Classification:**
E21B 34/12 (2006.01) *E21B 43/12* (2006.01)
E21B 34/14 (2006.01)
- (21) **International Application Number:**
PCT/US2012/034013
- (22) **International Filing Date:**
18 April 2012 (18.04.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant (for all designated States except US):** **HAL-LIBURTON ENERGY SERVICES, INC.** [US/US];
10200 Bellaire Boulevard, Houston, Texas 77072 (US).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** **HOLDERMAN, Luke**
[US/US]; 3709 Campstone Drive, Plano, Texas 75023 (US).
- (74) **Agents:** **PIPER, Michael W.** et al.; Conley Rose, P.C.,
5601 Granite Parkway, Suite 750, Plano, Texas 75024 (US).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

- with international search report (Art. 21(3))

(54) **Title:** APPARATUS, SYSTEMS AND METHODS FOR A FLOW CONTROL DEVICE

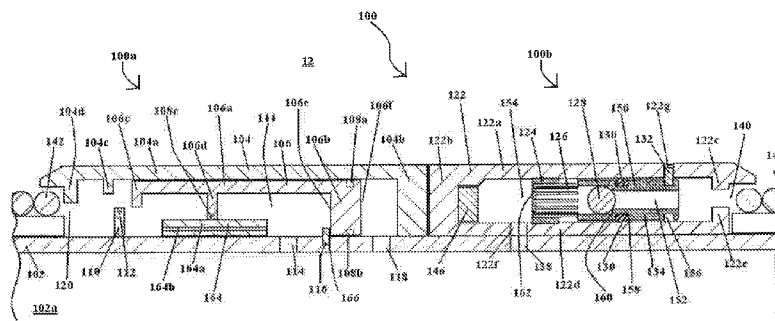


FIGURE 2

(57) **Abstract:** A flow control device for control of fluid flow through a tubular member comprises a control chamber having a piston disposed therein, where the piston is moveable from an open piston position to a closed piston position by the application of a first fluid pressure, and a valve chamber having a valve therein, where the valve is moveable from a closed valve position to an open valve position by the application of a second fluid pressure. A seal preventing fluid flow through the control chamber into the tubular member is formed in the closed piston position, and a flow path through the valve chamber and into the tubular member is formed in the open valve position.

