



(51) International Patent Classification:
A61N 2/08 (2006.01)

(21) International Application Number:
PCT/US2012/047319

(22) International Filing Date:
19 July 2012 (19.07.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/547,218 14 October 2011 (14.10.2011) US
13/544,950 9 July 2012 (09.07.2012) US

(71) Applicant (for all designated States except US): **NIKKEN INTERNATIONAL, INC.** [US/US]; 52 Discovery Way, Irvine, CA 92618 (US).

(72) Inventor; and

(71) Applicant : **BALZER, David** [US/US]; 52 Discovery Way, Irvine, CA 92618 (US).

(74) Agent: **CISLO, Daniel, M.**; Cislo & Thomas LLP, 1333 2nd Street, Suite 500, Santa Monica, CA 90401 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

[Continued on next page]

(54) Title: CONFIGURABLE MAGNETIC ORIENTATION SYSTEM

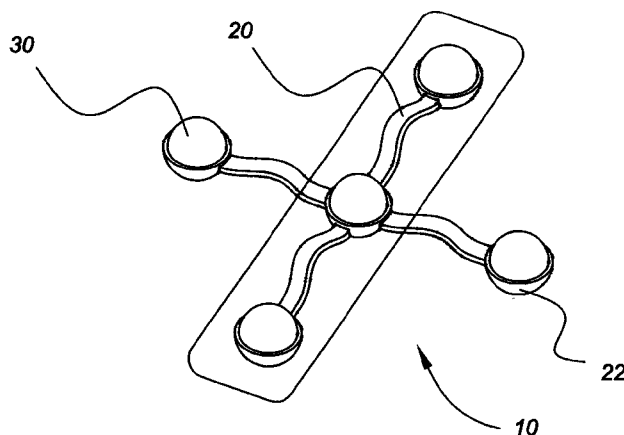


FIG. 1

(57) Abstract: A system for providing at an application surface of a therapeutic device a multitude of magnetic flux lines (32) of different angles and strengths, including a plurality of arms (20) and a plurality of magnets (30). Each arm piece may have one or more connecting members and one or more magnet receiving sockets or recesses (22). At least some of the one or more connecting members (28) are generally configured to attach to one or more attachment or mating (29) mechanisms on other arms. The magnets (30) are placed in the sockets (22), and the connecting members (28) of the plurality of arms are connected such that the arms form hub-and-spoke configurations, chain-configurations, loops, lines, or any combination of the above.



Published:

— *with international search report (Art. 21(3))*