



- (51) **International Patent Classification:**
E21B 43/26 (2006.01) *E21B 34/14* (2006.01)
- (21) **International Application Number:**
PCT/US2013/046127
- (22) **International Filing Date:**
17 June 2013 (17.06.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/544,750 9 July 2012 (09.07.2012) US
- (71) **Applicant:** HALLIBURTON ENERGY SERVICES, INC. [US/US]; 10200 Bellaire Boulevard, Houston, Texas 77072 (US).
- (72) **Inventors:** PATTERSON, Robert Brice; 2114 W. Walnut, Duncan, Oklahoma 73533 (US). ABLES, William Colt; RR5 Box 255C, Duncan, Oklahoma 73533 (US). GILES, Jon Jacob; Route 2 Box 327A, Marlow, Oklahoma 73055 (US).
- (74) **Agents:** CONLEY ROSE, P.C. et al.; 5601 Granite Parkway, Suite 500, Plano, Texas 75024 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) **Title:** WELLBORE SERVICING ASSEMBLIES AND METHODS OF USING THE SAME

FIG. 2

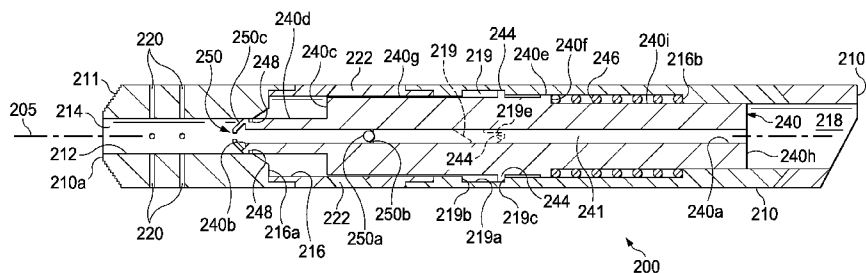

(57) **Abstract:** An apparatus for servicing a wellbore comprising a housing defining an axial flowbore and comprising high-pressure ports, high-volume ports, and a mandrel slidably positioned within the housing, the mandrel defining a mandrel axial flowbore and being alternately movable from a first position to a second position and to a third position, wherein, when the mandrel is in the second position, a route of fluid communication via the high-pressure ports is provided and a route of fluid communication via the high-volume ports is obstructed, wherein, when the mandrel is in the third, position, a route of fluid communication via the high-volume ports is provided, and wherein the apparatus is transitionable from the second position to the third position without communicating an obturating member to the apparatus, without removing an obturating member from the apparatus, or combinations thereof.