



(51) International Patent Classification:
G01N 21/64 (2006.01) G01N 21/85 (2006.01)

(21) International Application Number:
PCT/FI2022/050055

(22) International Filing Date:
28 January 2022 (28.01.2022)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20215096 29 January 2021 (29.01.2021) FI

(71) Applicant: MARGINUM OY [FI/FI]; c/o Samu Lehtonen,
Hiihtäjätie 11 A 18, 70200 Kuopio (FI).

(72) Inventors: LEHTONEN, Samu, Juhani, Rafael; c/o Mar-
ginum Oy, c/o Samu Lehtonen, Hiihtäjätie 11 A 18, 70200
Kuopio (FI). ELOMAA, Antti-Pekka; c/o Marginum Oy,
c/o Samu Lehtonen, Hiihtäjätie 11 A 18, 70200 Kuopio
(FI). LESKINEN, Juho, Hermann; c/o Marginum Oy, c/
o Samu Lehtonen, Hiihtäjätie 11 A 18, 70200 Kuopio (FI).
SEMENOV, Dmitry, Vladimirovich; c/o Marginum Oy,
c/o Samu Lehtonen, Hiihtäjätie 11 A 18, 70200 Kuopio
(FI).

(74) Agent: KOLSTER OY AB; (Salmisaarenaukio 1), P.O.
Box 204, 00181 Helsinki (FI).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

(54) Title: APPARATUS AND METHOD FOR DETECTING FLUORESCENCE




Fig. 3

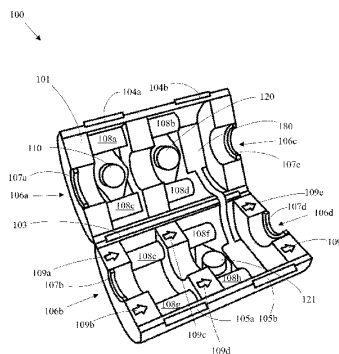


Fig. 4

(57) Abstract: Disclosed is an apparatus (100) for detecting fluorescence of a sample (118, 119) obtained from an object, the sample (118, 119) comprising one or more fluo-
rophores and representing a disease or condition, and the sample (118, 119) being trans-
ported away from the object in a transparent conduit (131). The apparatus comprises
a housing (101) comprising one or more light sources (110) and one or more light re-
ceivers (120), and a computing device (180). It is also disclosed a method for detecting
fluorescence of a sample (118, 119) obtained from an object, the sample (118, 119)
comprising one or more fluorophores and representing a disease or condition, and the
sample (118, 119) being transported away from the object in a transparent conduit (131).
Furthermore, it is disclosed uses of the apparatus (100) and a kit-of-parts comprising
the apparatus (100).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*