


Abstract

Moulding compounds for the production of solar cell modules

Moulding composition, encompassing

- a) at least one polyalkyl (meth)acrylate, and
- b) at least one compound according to formula (I)

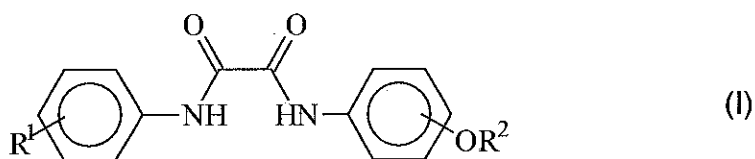

in which the moieties R^1 and R^2 are independently an alkyl or cycloalkyl moiety having from 1 to 20 carbon atoms,

where the moulding composition further comprises

- c) at least one infrared absorber,

where the transmittance of the moulding composition

- at 500 nm is smaller than 89%,
- at 1000 nm is smaller than 80%,
- at 1150 nm is smaller than 70% and
- at 1600 nm is smaller than 77%, in each case measured by means of infrared spectroscopy at 25°C on 3 mm plaques.

The moulding composition is in particular used for the production of solar-cell modules.