



(51) International Patent Classification:

C02F 1/48 (2006.01) *C02F 1/461* (2006.01)
C02F 1/00 (2006.01)

(21) International Application Number:

PCT/GB2010/050595

(22) International Filing Date:

7 April 2010 (07.04.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0906271.2 9 April 2009 (09.04.2009) GB

(71) Applicant (for all designated States except US): **HYDROPATH HOLDINGS LIMITED** [GB/GB]; 2nd Floor Manfield House, 1 Southampton Street, London WC2R 0LR (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **STEFANINI, Daniel** [GB/GB]; 22 Beeston Fields Drive, Nottingham, Nottinghamshire NG9 3DB (GB).

(74) Agent: **FORRESTER KETLEY & CO**; Chamberlain House, Paradise Place, Birmingham, West Midlands B3 3HP (GB).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ESTABLISHMENT OF ELECTRODES IN A LIQUID

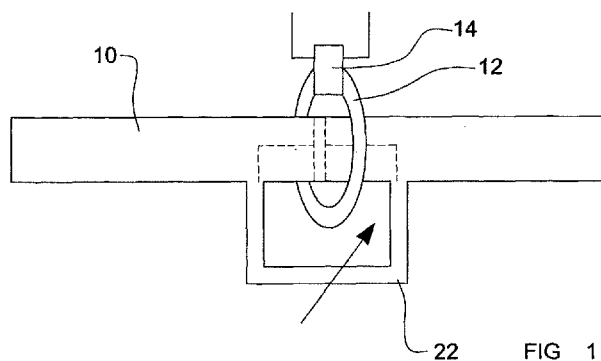

(57) Abstract: A method, and apparatus, wherein an effect of establishing electrodes in a region of a liquid is achieved by providing a core of magnetically-conductive material around a lateral wall containing the region of the liquid, the core of magnetically conductive material passing through a primary coil energised by an electrical signal, and wherein respective parts of the region of the liquid on opposite sides of the magnetically conductive core are connected by a passage containing the liquid, the passage and liquid affording a selected electrical resistance.