

a terminal device receives first configuration information from a network device, the first configuration information being used for configuring a set of Channel State Information-Reference Signal (CSI-RS) resources, wherein respective CSI-RS resources of the group are quasi co-located with respect to a first Quasi Co-Location (QCL) parameter.

101

FIG.1

a network device transmits first configuration information to a terminal device, the first configuration information being used for configuring a set of Channel State Information-Reference Signal (CSI-RS) resources, wherein respective CSI-RS resources of the group are quasi co-located with respect to a first Quasi Co-Location (QCL) parameter.

201

FIG. 2

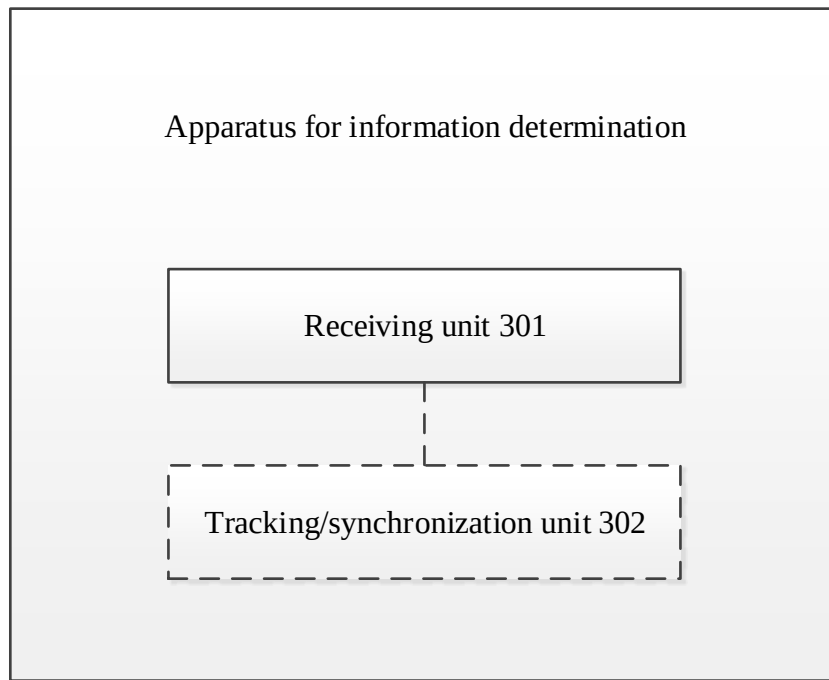


FIG. 3

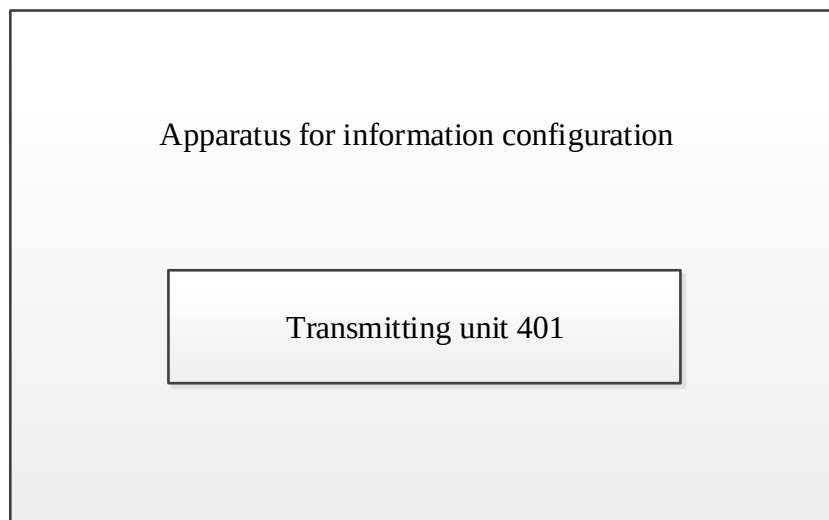


FIG. 4

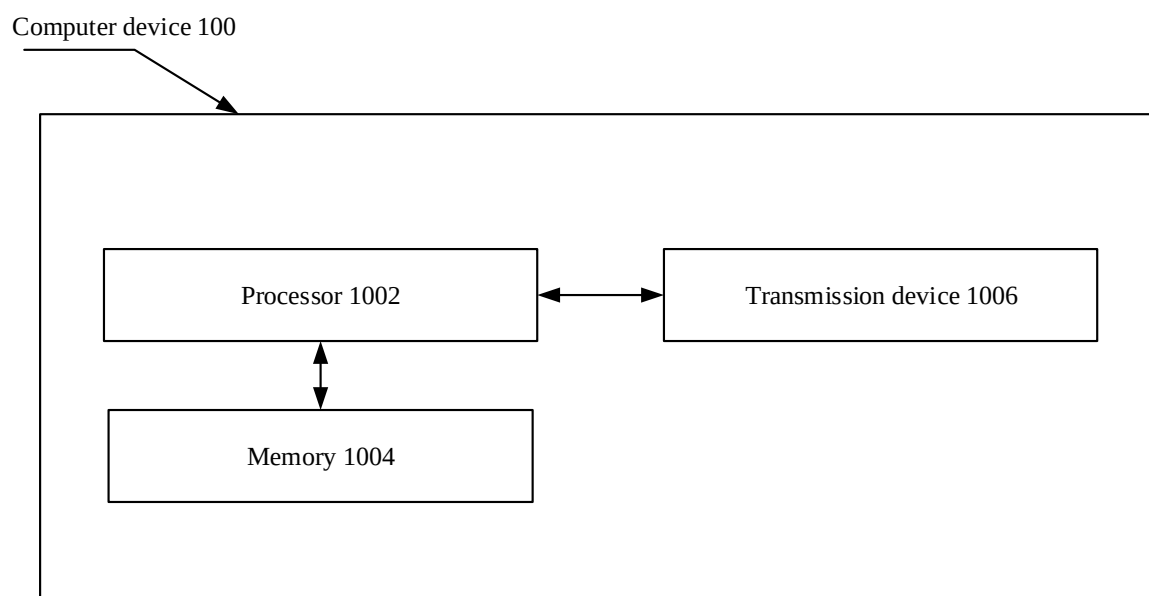


FIG. 5