

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
12 October 2023 (12.10.2023)



(10) International Publication Number
WO 2023/194852 A4

- (51) **International Patent Classification:**
G01D 5/14 (2006.01) *G01P 3/481* (2006.01)
- (21) **International Application Number:**
PCT/IB2023/053187
- (22) **International Filing Date:**
30 March 2023 (30.03.2023)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
22166892.4 06 April 2022 (06.04.2022) EP
- (71) **Applicant:** RVMAGNETICS, A.S. [SK/SK]; Němcovej
30, 042 18 Košice (SK).
- (72) **Inventor:** VARGA, Rastislav; Hodkovce 21, 04421 Hod-
kovce (SK).
- (74) **Agent:** LITVÁKOVÁ A SPOL., S. R. O.; Sliačska 1/A,
831 02 Bratislava (SK).

KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY,
MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA,
NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO,
RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, CV,
GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST,
SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ,
RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ,
DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT,
LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE,
SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))
- with amended claims and statement (Art. 19(1))

Date of publication of the amended claims and statement:

21 December 2023 (21.12.2023)

(54) **Title:** PHYSICAL QUANTITY MEASUREMENT SYSTEM AND/OR FOR POSITION MEASUREMENT WITH BISTABLE
MAGNETIC WIRE, METHOD OF MEASUREMENT

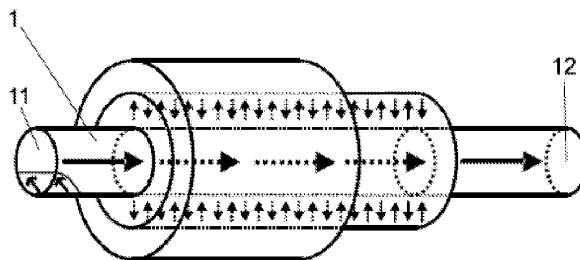


Fig. 1

(57) **Abstract:** The system for physical quantity measurement and/or for position measurement with a bistable magnetic wire (1), which comprises excitation element (2) for creating of magnetic field and a sensing element (3). Within the range of the magnetic field of the excitation element (2), a bistable magnetic wire (1) is placed, which has a first end (11) and an oppositely placed second end (12). The bistable magnetic wire (1) is adjusted for magnetization by a single Barkhausen jump from the first end (11) to the second end (12) or vice versa, wherein the excitation element (2) and bistable magnetic wire (1) are placed in a mutual position with an asymmetric magnetic field with respect to the bistable magnetic wire (1), where the size of the magnetic field excited by the excitation element (2) at the first end (11) is different from the size of the magnetic field excited by the excitation element (2) at the second end (12). The asymmetry of the magnetic field is created due to the mutual asymmetrical position of the excitation element (2) and the bistable magnetic wire (1) and/or due to the asymmetrical construction of the excitation element (2).



WO 2023/194852 A4