



(51) International Patent Classification:

F24H 1/00 (2006.01) *F24H 9/20* (2006.01)
F24H 1/18 (2006.01) *F24H 9/00* (2006.01)

(21) International Application Number:

PCT/AU2012/000902

(22) International Filing Date:

30 July 2012 (30.07.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2011904213 12 October 2011 (12.10.2011) AU

(71) Applicant (for all designated States except US): **ZIP INDUSTRIES (AUST) PTY LTD** [AU/AU]; 67 Allingham Street, Condell Park, NSW 2200 (AU).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CHERTKOW, Brian** [AU/AU]; 113 Collins Road, St Ives Chase, NSW 2075 (AU). **MOULT, Kevin** [AU/AU]; 75 Tuff Hill Lane, South Maroota, NSW 2756 (AU).

(74) Agent: **SPRUSON & FERGUSON**; GPO Box 3898, Sydney, NSW 2001 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A BOILING WATER HEATER SYSTEM AND METHOD OF HEATING WATER IN SAME

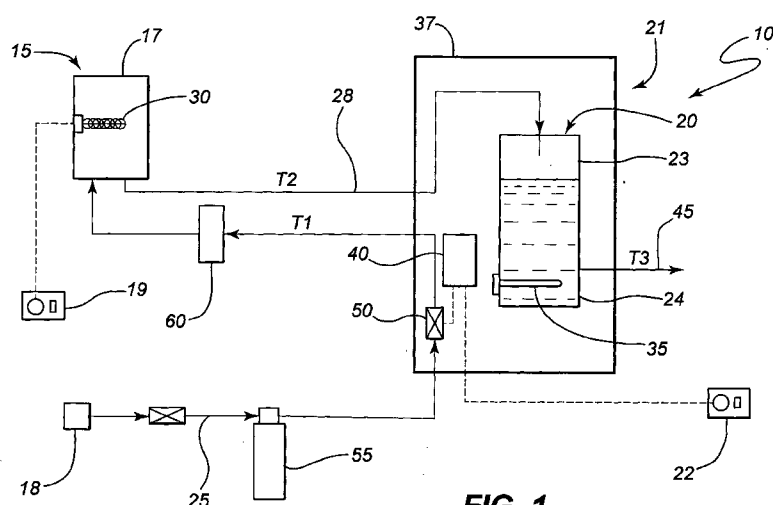


FIG. 1

(57) Abstract: A boiling water heater system (10) for providing hot water at a dispensing outlet (45). The heater system (10) includes a first water heater (15), a second water heater (21). The first water heater (15) is arranged in fluid communication with a water supply (18) for heating water from the water supply (18) from an ambient temperature (T1) to a first elevated temperature (T2). The second water heater (21) is arranged in fluid communication with the first water heater (15) for heating the water from the first elevated temperature (T2) to a dispensing temperature (T3), that is higher than the first elevated temperature (T1). The second water heater (21) includes a storage tank (20) arranged in fluid communication with a dispensing outlet (45).