



## (51) International Patent Classification:

G06F 1/16 (2006.01) G06F 3/0487 (2013.01)  
G06F 3/01 (2006.01)

## (21) International Application Number:

PCT/EP2015/065083

## (22) International Filing Date:

2 July 2015 (02.07.2015)

## (25) Filing Language:

English

## (26) Publication Language:

English

## (30) Priority Data:

14/321,880 2 July 2014 (02.07.2014) US

(71) Applicant: NAGRAVISION S.A. [CH/CH]; Route de Genève 22-24, CH-1033 Cheseaux-sur-Lausanne (CH).

(72) Inventor: BURCKARD, Antoine; Rue Louis Antoine Bougainville 18, F-78180 Montigny le Bretonneux (FR).

(74) Agent: LEMAN CONSULTING S.A. 284; Chemin de Précossy 31, CH-1260 Nyon (CH).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

## Published:

— with international search report (Art. 21(3))

(54) Title: APPLICATION SWAP BASED ON SMART DEVICE POSITION

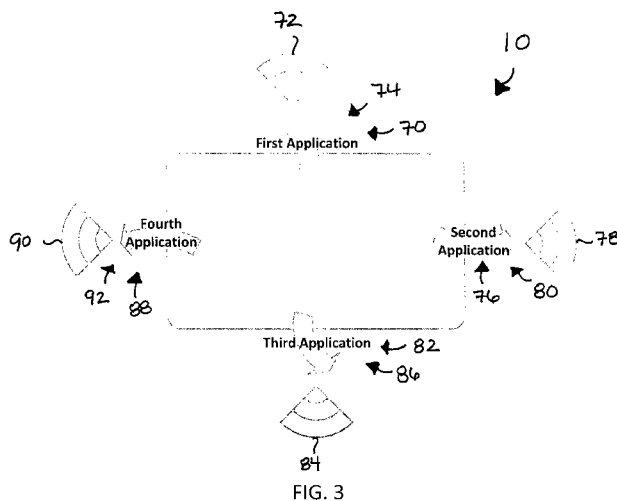

(57) Abstract: A smart device capable of switching between at least two applications based on the position of the smart device and a method of doing the same is provided. It is proposed a smart device (10) configured to switch between at least two applications, comprising: a first application (74); a second application (76) different from the first application (74); a user interface (14) displaying the first application (74); a controller (18) communicatively connected to the user interface (14), the controller (18) having memory for storing the first application (74) and the second application (76) on the smart device (10); and at least one sensing device (16) communicatively connected to the controller (18), the at least one sensing device (16) being configured to detect at least one of an orientation and a flicking motion of the smart device (10) in a three-dimensional space, wherein the controller (18) is configured to associate the first application (74) with at least one of a first orientation and a first flicking motion within the three-dimensional space and to associate the second application (76) with at least one of a second orientation and a second flicking motion within the three-dimensional space and wherein the controller (18) is configured to switch from the first application (74) to the second application (76) when the at least one sensing device (16) detects one of the second orientation and the second flicking motion associated with the second application (76).