



- | | |
|---|--|
| <p>(51) International Patent Classification:
 <i>A01M 13/00</i> (2006.01) <i>B63J 2/04</i> (2006.01)
 <i>B63J 2/08</i> (2006.01) <i>B63B 25/00</i> (2006.01)</p> | <p>(74) Agent: FPA PATENT ATTORNEYS PTY LTD; Level 43, 101 Collins Street, Melbourne, Victoria 3000 (AU).</p> |
| <p>(21) International Application Number:
 PCT/AU2021/050505</p> | <p>(81) Designated States (<i>unless otherwise indicated, for every kind of national protection available</i>): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.</p> |
| <p>(22) International Filing Date:
 26 May 2021 (26.05.2021)</p> | |
| <p>(25) Filing Language:
 English</p> | |
| <p>(26) Publication Language:
 English</p> | |
| <p>(30) Priority Data:
 2020901707 26 May 2020 (26.05.2020) AU
 2020901708 26 May 2020 (26.05.2020) AU</p> | <p>(84) Designated States (<i>unless otherwise indicated, for every kind of regional protection available</i>): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,</p> |
| <p>(71) Applicant: FINTRAN AUSTRALIA PTY LTD
 [AU/AU]; 1/5 Phillip Court, Port Melbourne, Victoria 3207 (AU).</p> | |
| <p>(72) Inventors: SLAVIN, Matthew Brian; c/- 1/5 Phillip Court, Port Melbourne, Victoria 3207 (AU). JANA, Aric; c/- 1/5 Phillip Court, Port Melbourne, Victoria 3207 (AU).</p> | |

(54) Title: SYSTEM AND METHOD FOR FUMIGATING A VESSEL WITH CREW PROTECTION

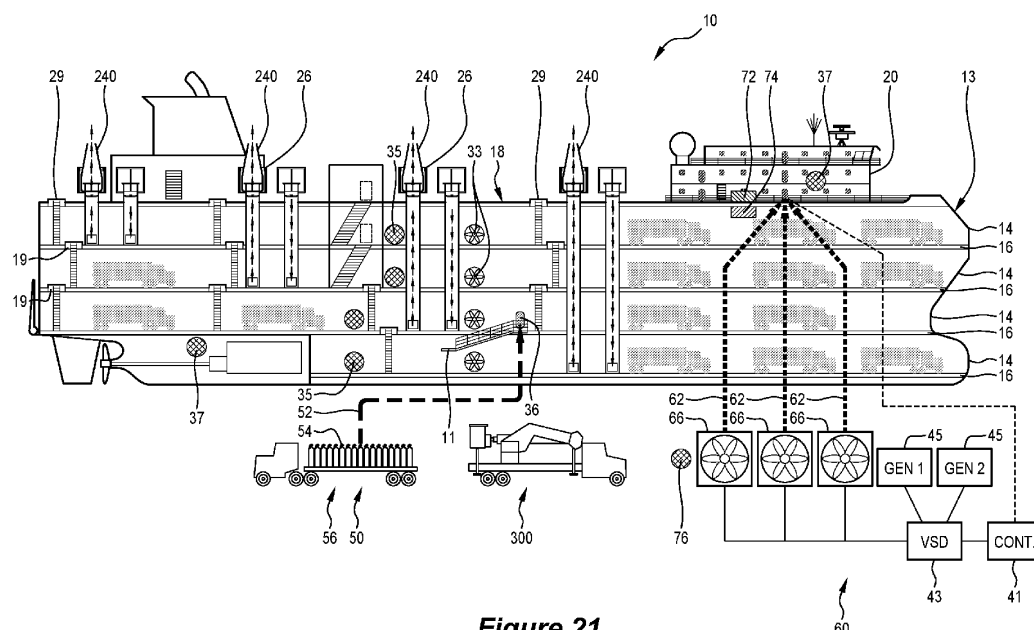


Figure 21

(57) Abstract: A methods and systems of fumigating a vessel include delivering fumigant to a cargo area of the vessel. In particular, the vessel may be a roll-on/roll-off vessel. In such a system, an air pressure system is provided for maintaining a selected minimum pressure differential between a selected area of the vessel above the cargo area and the cargo area, such that pressure of the selected area is greater than the cargo area. A control system may maintain the pressure differential.

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*