

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 October 2006 (05.10.2006)

PCT

(10) International Publication Number
WO 2006/105508 A1

(51) International Patent Classification:
H01R 13/514 (2006.01)

(21) International Application Number:
PCT/US2006/012386

(22) International Filing Date: 31 March 2006 (31.03.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/666,971 31 March 2005 (31.03.2005) US

(71) Applicant (for all designated States except US): **MOLEX INCORPORATED** [US/US]; 2222 Wellington Court, Lisle, Illinois 60532 (US).

(72) Inventors: **LAURX, John, C.**; 1346 Garfield Avenue, Aurora, Illinois 60506 (US). **DUNHAM, David, E.**; 2010 Prairie Street, Aurora, Illinois 60506 (US). **ELO, Timothy, S.**; 2144 Fulham Drive, Naperville, Illinois 60564 (US).

HUMBERT, Gary; 346 Colonial Circle, Geneva, IL 60134 (US).


(74) Agent: **PAULIUS, Thomas, D.**; MOLEX INCORPORATED, 2222 Wellington Court, Lisle, Illinois 60532 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: HIGH-DENSITY, ROBUST CONNECTOR FOR STACKING APPLICATIONS

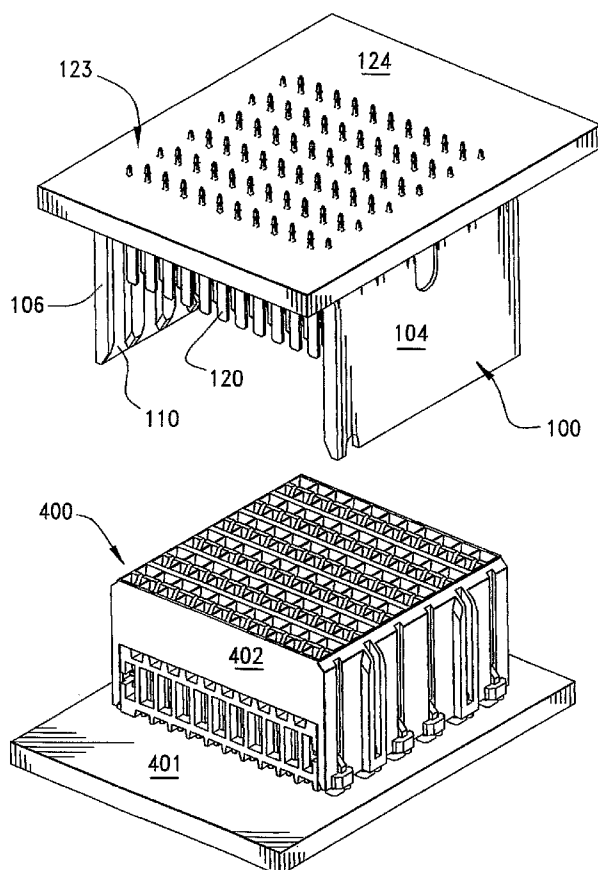

(57) Abstract: A high speed connector (400) includes a plurality of terminal assemblies (405) in which two columns of conductive terminals (409) are supported in an insulative support body (407), the body including an internal cavity disposed between the two columns of conductive terminals. The terminals are arranged in horizontal pairs (410), and the internal cavity defines an air channel between each horizontal pair of terminals arranged in the two columns of terminals. The terminals are further aligned with each other in each row so that horizontal faces of the terminals in the two rows face each other to thereby promote broadside coupling between horizontal pairs of terminals.

WO 2006/105508 A1



FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

Published:

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*