



(51) International Patent Classification:

B01D 63/06 (2006.01) **F28F 3/02** (2006.01)
B01D 63/14 (2006.01) **F28D 9/04** (2006.01)
F28D 9/00 (2006.01)

(21) International Application Number:

PCT/NL2009/050449

(22) International Filing Date:

21 July 2009 (21.07.2009)

(25) Filing Language:

Dutch

(26) Publication Language:

English

(30) Priority Data:

1035752 25 July 2008 (25.07.2008) NL

(71) Applicant (for all designated States except US): **PAN-VEST B.V.** [NL/NL]; Nusterweg 69, NL-6136 KT Sittard (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **NELEMANS, Bert, Johan** [NL/NL]; Hobbelrade 81A, NL-6176 CK Spaubeek (NL). **VAN SONSBEEK, Hendrikus, Johannes** [NL/NL]; Bellinistraat 3, NL-4561 VH Hulst (NL).

(74) Agent: **ALGEMEEN OCTROOI- EN MERKENBUREAU B.V.**; PO Box 645, NL-5600 AP Eindhoven (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: DEVICE SUITABLE FOR TREATING A FLUID, AS WELL AS A METHOD SUITABLE FOR MANUFACTURING SUCH A DEVICE

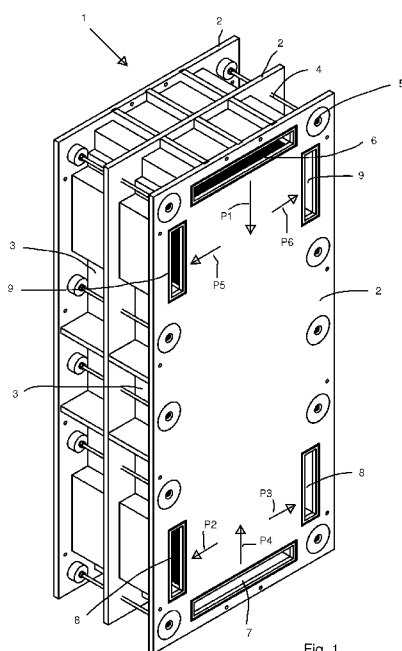


Fig. 1

(57) Abstract: A device which is suitable for treating a fluid comprises an elongated foil formed of a plurality of foil layers arranged in zigzag fashion, wherein a first foil layer is connected to a second foil layer at a first end. The second foil layer is connected to a third foil layer at a second end remote from the first end. Spacers are arranged between said foil layers. The spacer comprises a mesh-like layer, through which fluid can flow in the plane of the mesh-like layer as well as transversely to the plane of the mesh-like layer.