

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 May 2003 (01.05.2003)

PCT

(10) International Publication Number
WO 03/034880 A1

(51) International Patent Classification⁷: **A47J 37/04**

(21) International Application Number: PCT/CN02/00548

(22) International Filing Date: 7 August 2002 (07.08.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
01107467.8 26 October 2001 (26.10.2001) HK

(71) Applicant and

(72) Inventor: **CHEUNG, Chun Kong Ian** [CN/CN]; Flat 1, 2/F Kai Fuk Industrial Centre, 1 Wang Tung Street, Kowloon Bay, Kowloon, Hong Kong (CN).

(74) Agent: **CHINA SINDA INTELLECTUAL PROPERTY LTD.**; Suite 1300 China Garment Mansion, No. 99 Jianguo Road, Chaoyang District, Beijing 100020 (CN).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **ROTISSERIE OVEN**

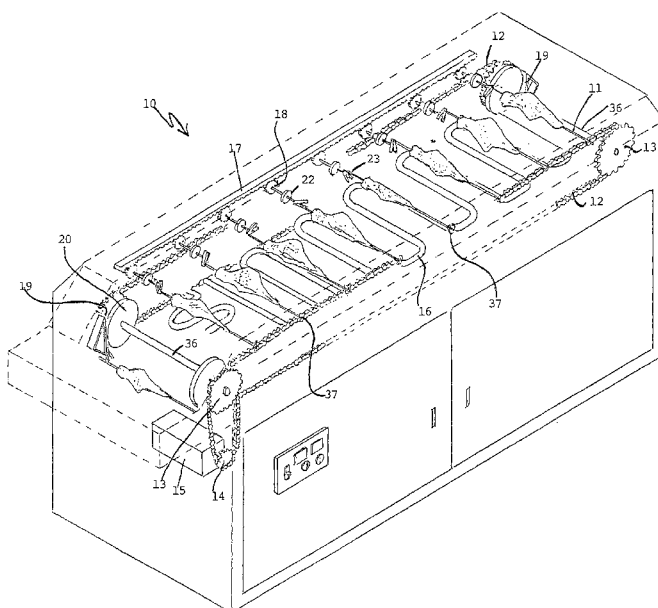

(57) **Abstract:** A Rotisserie Oven includes a heat source and a continuous conveyor mounted adjacent to the heat source. A number of skewer holding devices are affixed along the conveyor and each hold a skewer adjacent the heat source while being convey past the heat source. Turning devices are provided for rotating the skewers as they pass the heat source. A skewer detachment mechanism is provided to enable detachment of the skewer from the conveyor at an end of the rotisserie oven.



WO 03/034880 A1